


LOC	DIST	REVISIONS					
DF	S0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REV PER ECO-05-002584	07-05	AA	DE

1. TO MATE WITH AMP LGH-1/2L
RECEPTACLE WITH .89 [22.6] BARREL DEPTH.
2. OPERATING VOLTAGE: 15 KVDC AT 0 TO 70,000 FEET,
-55°C TO 125°C.
- 3 PIGTAIL IS SOLDER DIPPED. (867956-1 ONLY)
4. SPECIAL PACKAGING & MARKING REQUIREMENTS.
PACKAGED ONE ASS'Y PER POLYBAG WITH TAG.
TAG INFO:

AMP INC (00779)
(AMP P/N)
(CUST P/N)
QTY (1)
DO NOT OPEN
UNTIL READY TO USE

5 INSULATION CUT BUT NOT REMOVED. (5-867956-1 ONLY)

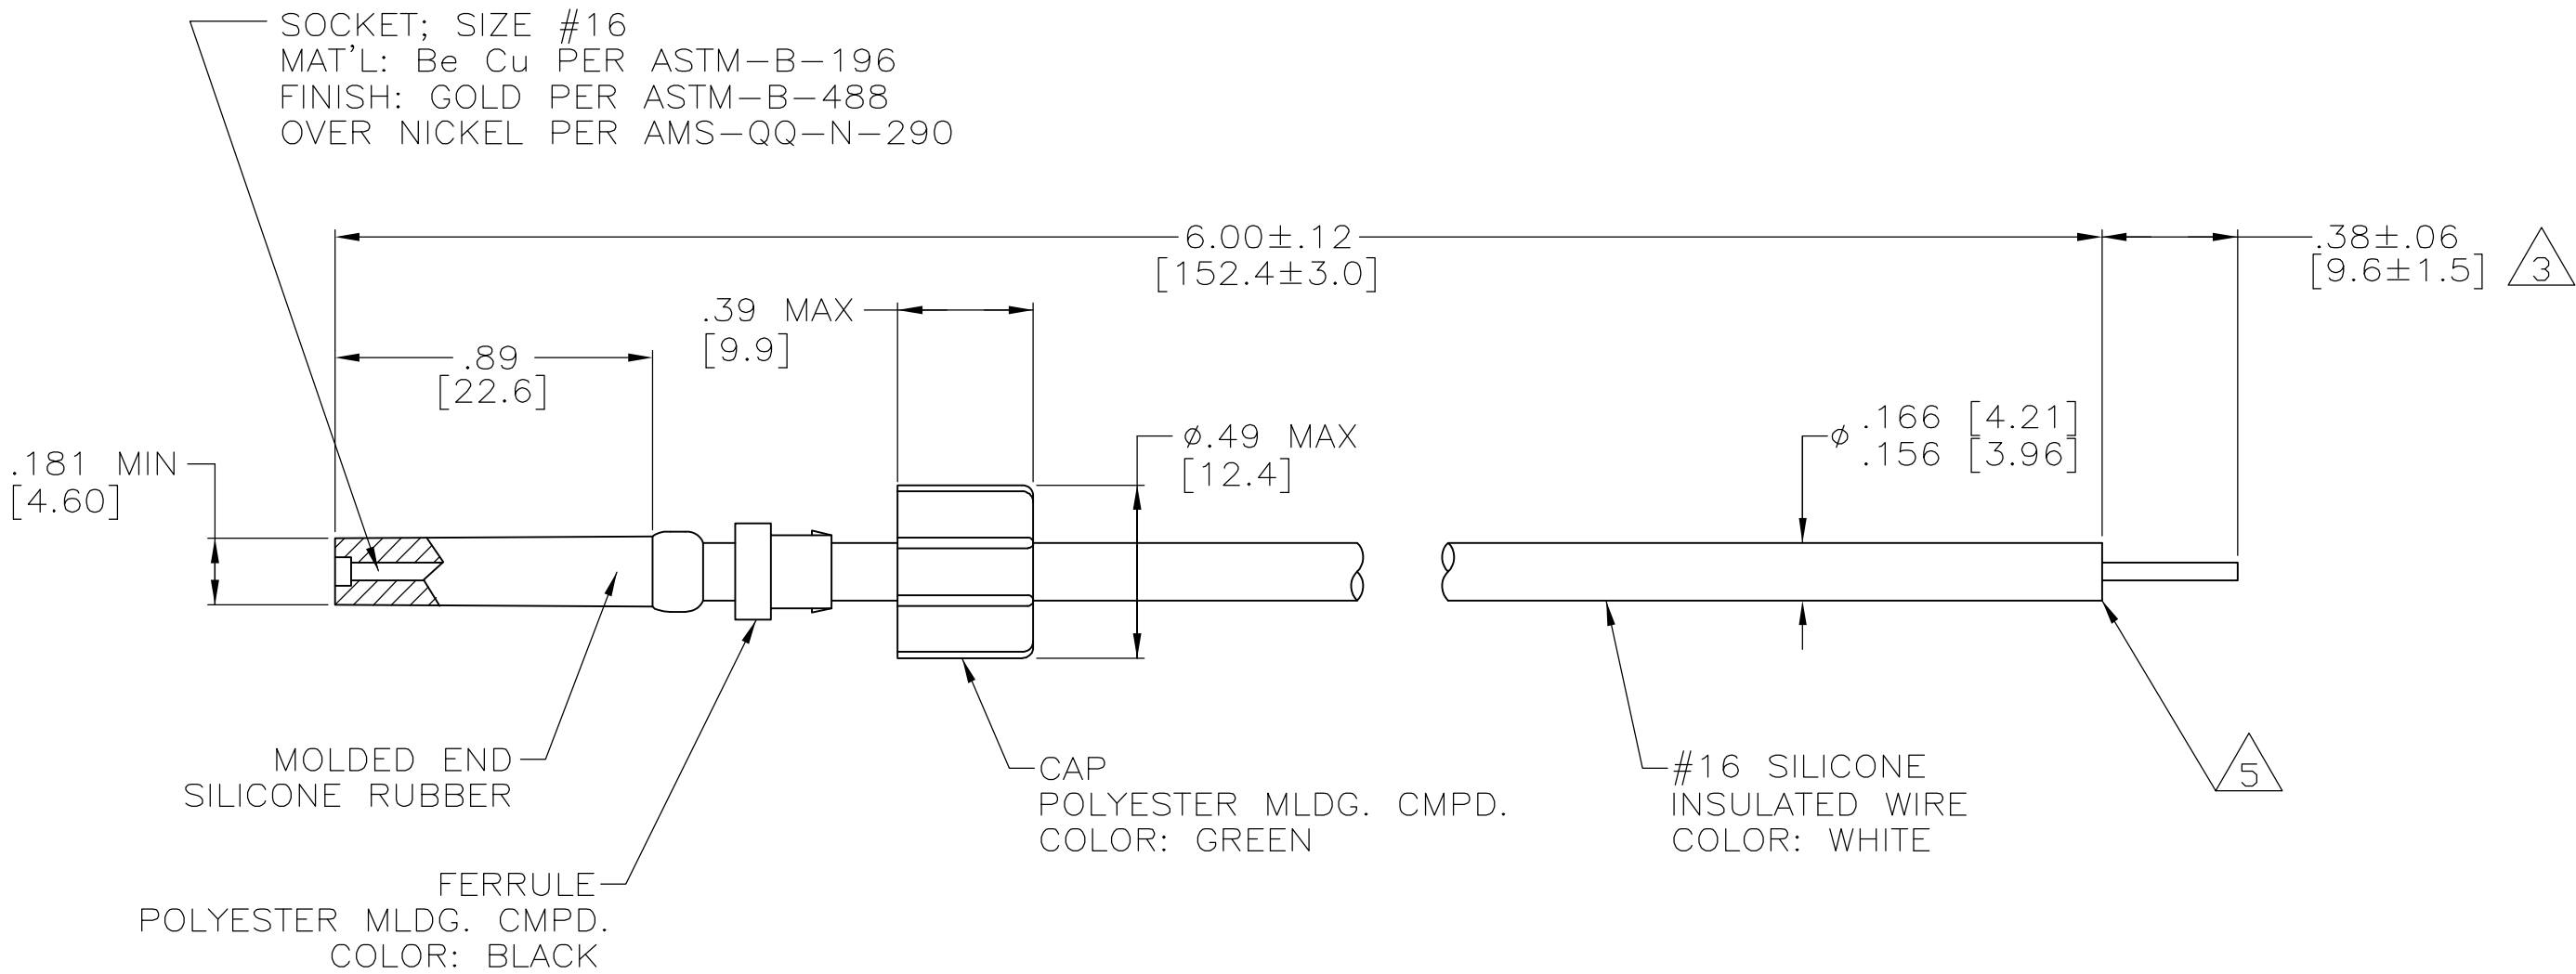

5	-	5-867956-1
3	301-0002-080	867956-1
REMARKS	CUST. P/N	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS	30-JUL-90	tyco Electronics		Tyco Electronics Corporation				
		CHK D.OPPLINGER	28-AUG-90			Harrisburg, Pa 17105-3608				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D.EABY	28-AUG-90	NAME LEAD ASSY POS STOP, SGL END LGH-1/2L				
		0 PLC ± - 1 PLC ± - 2 PLC ± .02 [0.5] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC						
				—						
				APPLICATION SPEC						
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS		WEIGHT		—	SIZE A2	CAGE CODE 00779	DRAWING NO C=867956	RESTRICTED TO —
				CUSTOMER DRAWING		SCALE 2:1		SHEET 1 of 1	REV B	