



Soldering Tips - Weller

MS SERIES

COMPATIBLE STATIONS:Weller WSL, Weller WSL2, Weller WD1, Weller WD2, Weller WS80, Weller WDS80, Weller WSD81, Weller WSP 80, Weller WPR 80

Plato is one of the largest manufacturers of soldering tips in the world, producing tips to fit all of the most popular soldering stations. The long life and fast heat recovery of Plato soldering tips increases user effectiveness and decreases production times. All Plato soldering tips manufactured since January 2004 are tinned with Lead-Free solder.

Long Life: Using a high quality Plato soldering tip increases soldering speed and decreases the total cost of manufacture. Higher temperatures and high tin content solders, common in lead-free soldering processes, place additional strain on soldering iron tips. The long life of a Plato soldering iron tip reduces tip changes, decreasing the total number of tips used and decreasing production time.

Rapid Heat Recovery: Plato soldering tips are constructed from highly conductive premium grade copper to transmit heat to the work more quickly than other brands of soldering tips. This quick heat recovery enables more joints to be soldered per minute, thus reducing manufacturing time and costs.



- Fast heat recovering increases soldering speed
- Longer tip reduces manufacturing costs
- Fewer tip change overs

Product Dimensions


MS-4140 Conical

0.8mm
10 units/case




MS-4120 Point

Cross Reference: Weller LT1
0.25mm
10 units/case



MS-4110 Point, long

Cross Reference: Weller LT1L
0.25mm
10 units/case




MS-4101 Angled SMD

Cross Reference: Weller LT1LX, Weller LT1S
0.25mm
10 units/case




MS-4100 Point, micro

0.25mm
10 units/case



MS-5160 Bevel, micro

Cross Reference: Weller LT4W
1.2mm
10 units/case



Techspray
P.O. Box 949, Amarillo, TX 79105
800-858-4043 • www.techspray.com




MS-3125 Angled SMD

Cross Reference: Weller LT4X

0.4mm

10 units/case

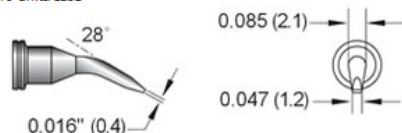


MS-3200 Screwdriver

Cross Reference: Weller LTA

1.6mm

10 units/case




MS-3200LF Screwdriver, long-life

Cross Reference: Weller LTA LF

1.6mm

10 units/case




MS-3300 Screwdriver

Cross Reference: Weller LTB

2.4mm

10 units/case




MS-3300LF Screwdriver, long-life

Cross Reference: Weller LTB LF

2.4mm

10 units/case




MS-3400 Screwdriver

Cross Reference: Weller LTC

3.2mm

10 units/case




MS-3400LF Screwdriver, long-life

Cross Reference: Weller LTC LF

3.2mm

10 units/case




MS-3600 Screwdriver

Cross Reference: Weller LTD

4.6mm

10 units/case




MS-3600LF Screwdriver, long-life

Cross Reference: Weller LTD LF

4.6mm

10 units/case




MS-0100 SMD flow tip

Cross Reference: Weller LTGW

2.1mm

10 units/case






MS-0100LF SMD flow tip, long-life

Cross Reference: Weller LTGW LF
2.1mm
10 units/case




MS-3110 Screwdriver

Cross Reference: Weller LTH
0.8mm
10 units/case




MS-3101 Angled SMD

Cross Reference: Weller LTHX
0.8mm
10 units/case




MS-3150 Screwdriver, long

Cross Reference: Weller LTK
1.3mm
10 units/case




MS-3250 Screwdriver, long

Cross Reference: Weller LTL
2.0mm
10 units/case



MS-3450 Screwdriver, long

Cross Reference: Weller LTM
3.2mm
10 units/case

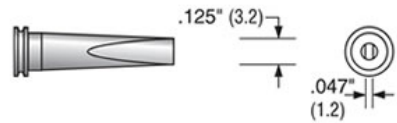


MS-4130 Point, long

Cross Reference: Weller LTS
0.5mm
10 units/case




MS-4200LF Point, rounded

Cross Reference: Weller LTO LF
0.9mm
10 units/case




MS-5300LF Bevel, long-life

Cross Reference: Weller LTBB LF
2.4mm
10 units/case



MS-5400LF Bevel, long-life

Cross Reference: Weller LTCC LF
3.2mm
10 units/case






MS-0201LF Knife, long-life

Cross Reference: Weller LTKN LF, Weller LTKN LF

5.7mm

10 units/case



Environmental Policy

Techspray is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray products are supported by a global sales, technical and customer services resources.

For additional technical information on this product or other Techspray products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

North America

Techspray
P.O. Box 949
Amarillo, TX 79105
800-858-4043
Email: tsales@techspray.com

Europe

ITW Contamination Control
Saffierlaan 5
2132 VZ Hoofddorp
The Netherlands
+31 88 1307 400
Email: info@itw-cc.com

Countries Outside US

Call to locate a distributor in your country.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

© 2013 Techspray, A Division of ITW



Techspray
P.O. Box 949, Amarillo, TX 79105
800-858-4043 • www.techspray.com