

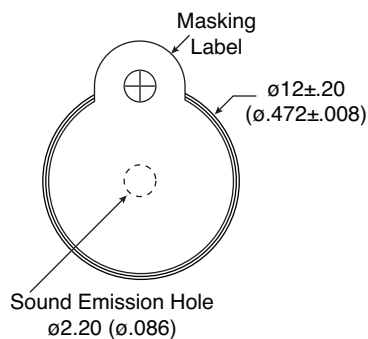

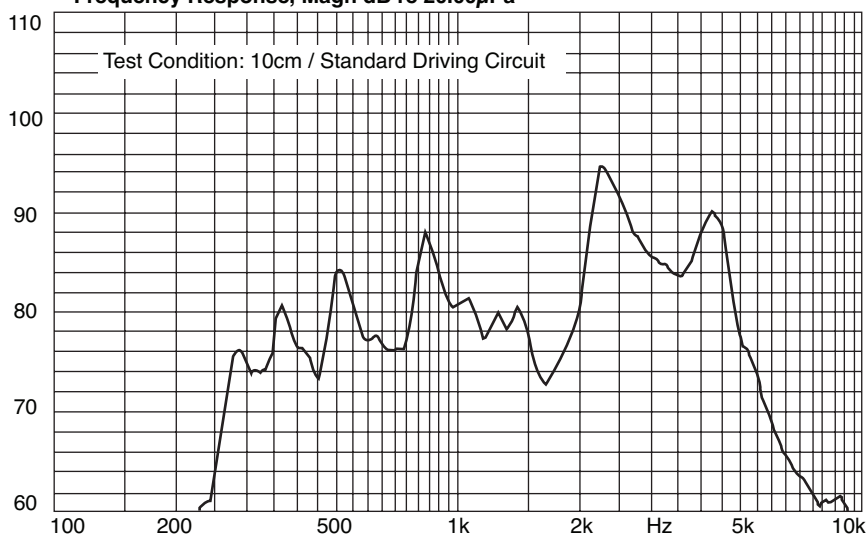


Part Number:

254-MB557-RO


Frequency Response, Magn dB re 20.00µPa


KT-400275

Electrical Specifications:

- Rated Voltage: 12VDC
- Resonant Frequency: 2400±150Hz
- Sound Pressure Level at 10cm: 85dB min.[applying rated voltage (resonant frequency, 1/2 duty, square wave)]
- Rated Current: 40mA max. [applying rated voltage (resonant frequency, 1/2 duty, square wave)]
- Coil Resistance: 140±14Ω
- Operating Voltage: 7~16V

Mechanical Specifications:

- Operating Temperature: -20°C ~ +70°C
- Storage Temperature: -30°C ~ +80°C

Materials:

- Housing: NORYL
- Weight: 2g

Note:

- RoHS Compliant