


THIRD ANGLE PROJECTION

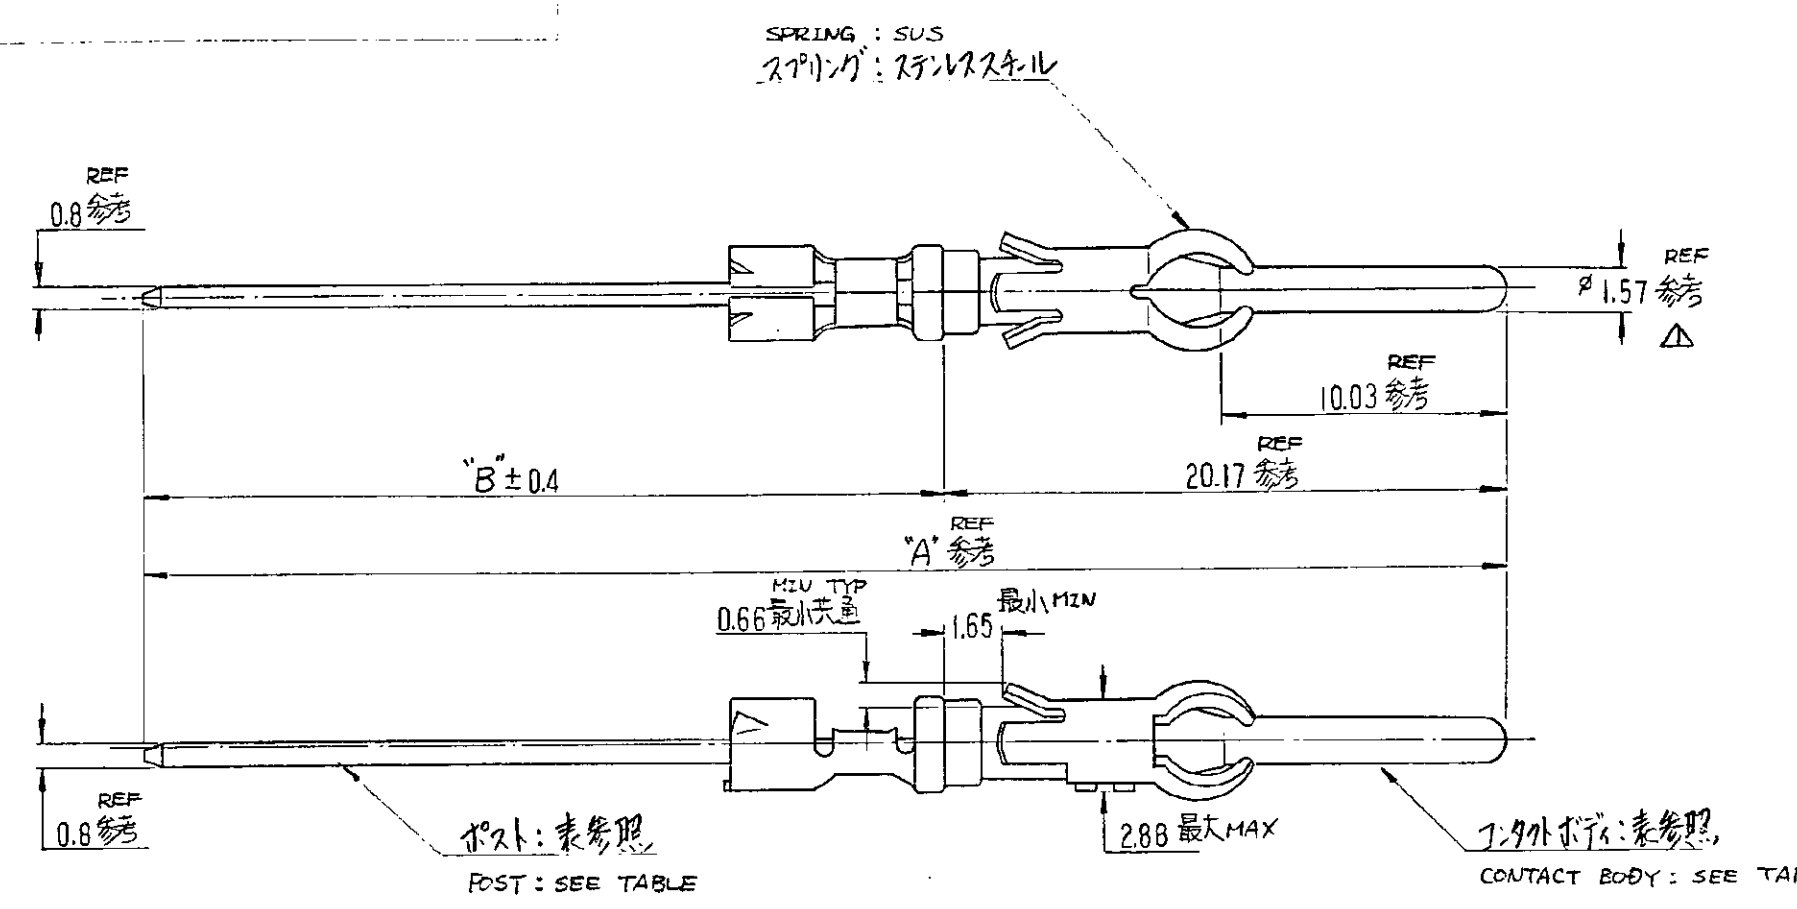

注記
 △ 金めき厚; 0.76 μ m以上

NOTE
 △ Gold plated; 0.76 μ m MIN.

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	BY	CHK	DATE
C5	REVISED PER ECO-09-026346	KK	AEG	NOV09
C4	P/N OBSOLETE ECR-07-002693	Y.Y	D.M	2FEB 2007
C3	REVISED (FJCO-1743-94)	I.H	S.M	12/94
C2	ADD NOTE J-1756	NM	S.M	11/92
C1	2-1 追加 J82-7566	NT	ST	11/23 94
C	REVISED (P-DWG REV.C) JFC S.M	ST	ST	12/7 92
B	REDRAWN WITH CHANGE JFC	ST	ST	11/23 90
A	INACTIVE-3 (REV.A)	ST	ST	1/16 79
Q	RELEASED (P-DWG REV.A)	ST	ST	9/9 77
LTR	REV. REVISION RECORD	DR	CHK	DATE

REV	DESCRIPTION	BY	CHK	DATE	
2	OBSOLETE	41.17 21	BRASS Sn Plating	BRASS Under Cu over Sn	2-171804-1
		44.37 24.2	Under Ni & Selective Au	Under Cu over Sn	1-171804-1
		50.17 30	Under Ni & Selective Au	Under Ni over Au Frsch	-3
		50.17 30			-2
	OBSOLETE	50.17 30	BRASS Under Ni & Selective Au	BRASS Under Cu over Sn	171804-1
		"A" "B"	J-CONTACT CONTACT	ポスト POST	REV. NUMBER
			材料及表面処理	MAT'L FINISH	
	MATERIAL	表参照	TOLERANCE	EXCEPT	AS NOTED
	FINISH	表参照	DR.	CHK.	DE.
			12-9-80	12-9-80	7/4/80
	TYCO	Tyco Electronics AMP K.K. Kawasaki, Japan			
	NAME	アンソインガート III (+) AMP INSERT II (+)			
		0.8x0.8 ポストタイプピンコンタクト			
	SIZE	A3	LOC	J	REV. INO.
					C-171804
	SCALE	4-1	REV.	C5	SHEET

(CUSTOMER DRAWING)