

FEATURES AND PATTERN

www.dbmlighting.com
0-006

Lens Reference	dbm14.5A-18F-GDW AM-1
Tested with LED	Osram Golden dragon AM
HAD*	15 deg
Curve Type	PEAK
Lens Material	PMMA
Operating temperature	-40°C+90°C

*HAD = Half Angle Divergence




OPTICAL EFFICIENCY

Half Angle Divergence: 15 deg

HAD Efficiency: 62 %

Collection Efficiency: 96 %

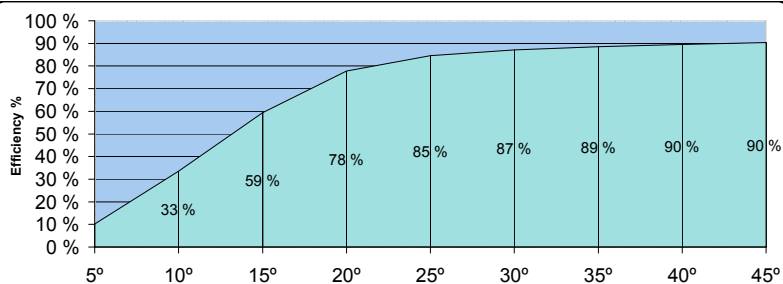


OUTPUT DISTRIBUTION


LED Flux: 85 Lumens 350mA

POLAR GRAPHIC

Max intensity
314Cd

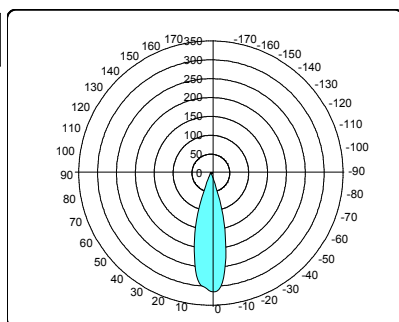

CARTESIAN GRAPHIC

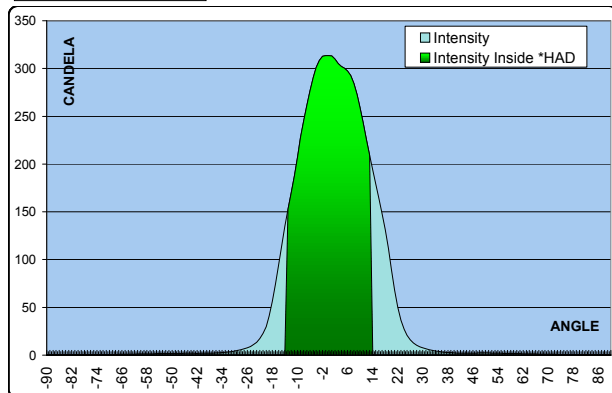

ILLUMINANCE

LED Flux: 85 Lumens 350mA

ILLUMINANCE VALUES AT VARIOUS DISTANCES

RANGE	1.0 m	2.0 m	3.0 m
ILLUMINANCE	313 Lux	78 Lux	35 Lux
MULTIPLICATOR RATE LED+LENS / LED ONLY	15 X		

