

Coplanarity .005". For Pin Counts >20 positions consult Technical Support.

Fig. 1




Fig. 2




Fig. 3

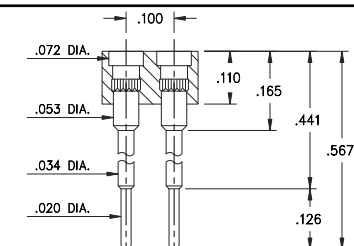


Fig. 4




Fig. 5





Fig. 6

- Series 419, 430 and 499 double row strips may be cut to any length.
- Spring Target connectors present a large flat surface for making tangent connections to our standard .042" dia spring pin plungers. The target connectors provide an excellent gold plated conductive path back to the board mounted spring pin connector.
- Target connectors use MM #1938, #1940, #1941, #1942 and #3024 pins. See page 185 for details.
- Insulators are high temp. thermoplastic.

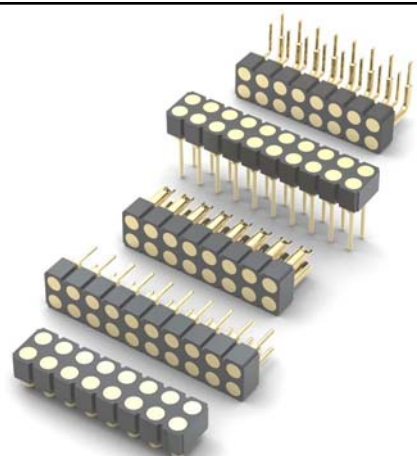

Ordering Information

Fig. 1	Series 419...041	Surface Mount
	419-10-2_ _-30-041000	Specify # of pins → 04-64
Fig. 2	Series 419...001	Standard Solder Tails
	419-10-2_ _-00-001000	Specify # of pins → 04-64
Fig. 3	Series 419...002	Long Solder Tails
	419-10-2_ _-00-002000	Specify # of pins → 04-64
Fig. 4	Series 419...005	Elevated Solder Tails
	419-10-2_ _-00-005000	Specify # of pins → 04-64
Fig. 5	Series 430...240	Solder Cups
	430-10-2_ _-00-240000	Specify # of pins → 04-64
Fig. 6	Series 499...008	Right Angle Solder Tails
	499-10-2_ _-10-008000	Specify # of pins → 04-64

For Electrical,
Mechanical & Environmental
Data, See pg. 4

RoHS
2002/95/EC

PLATING CODE =

10

Pin Plating



10 μ" Au