
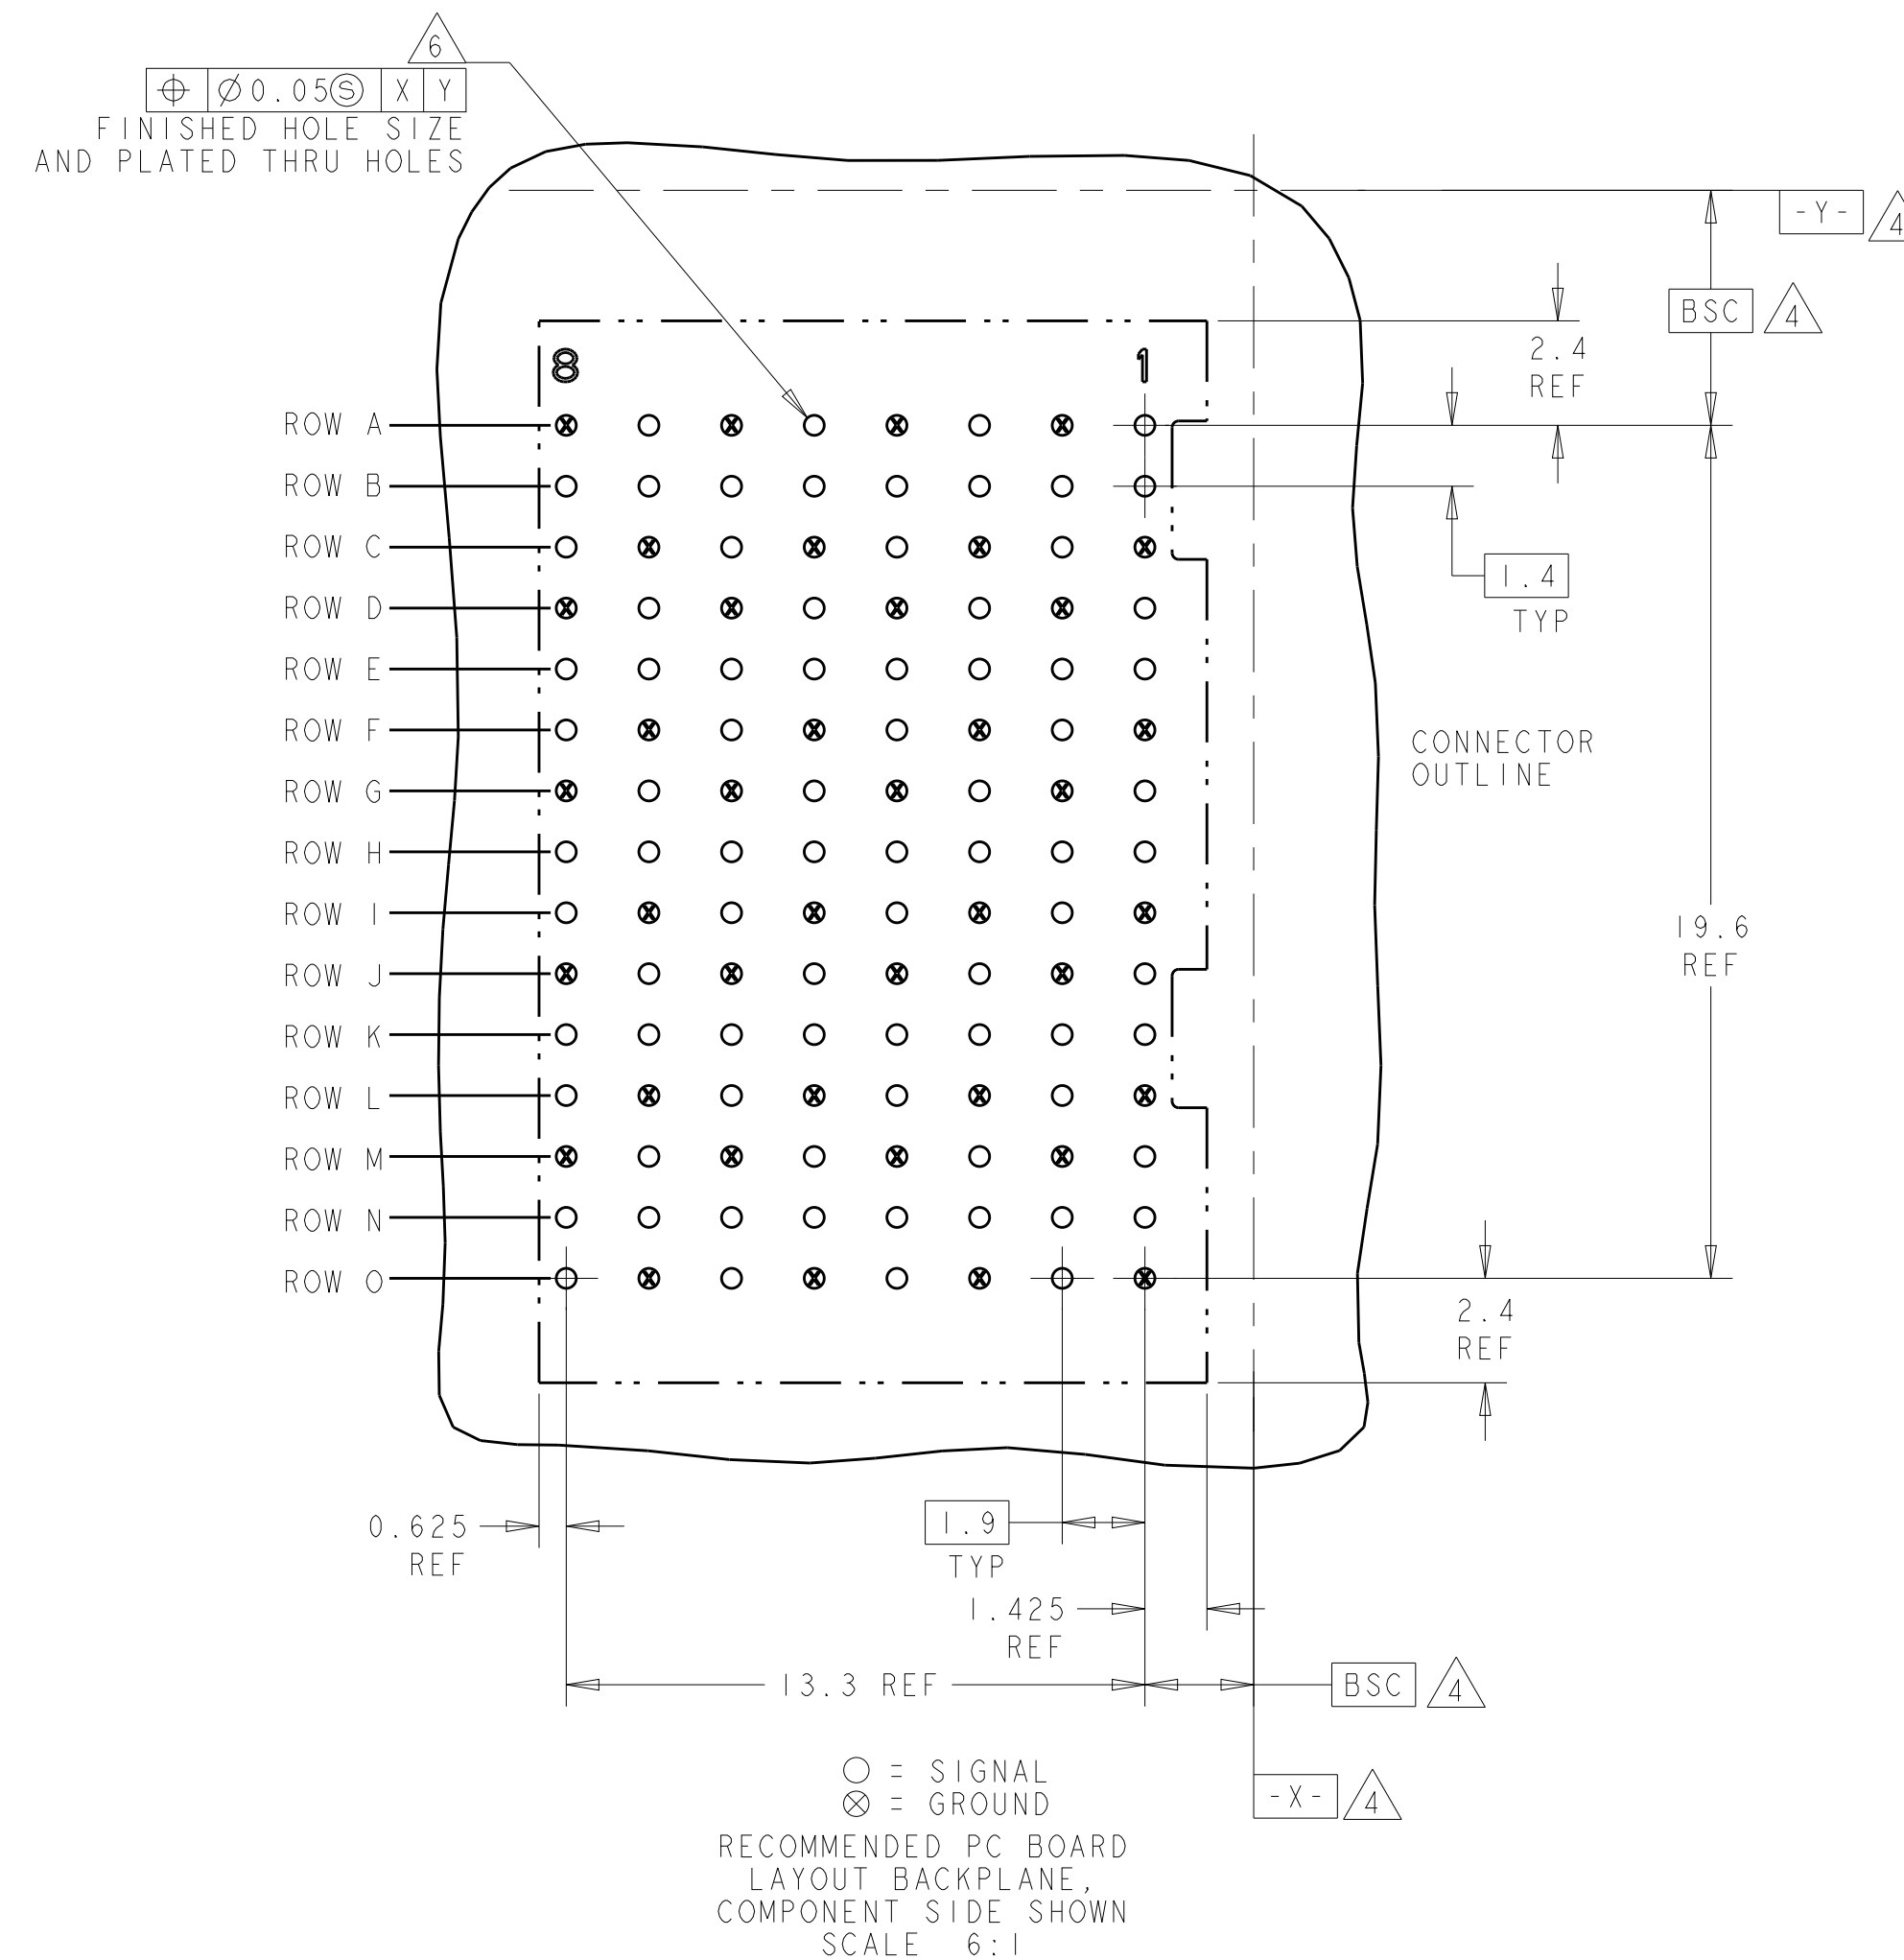
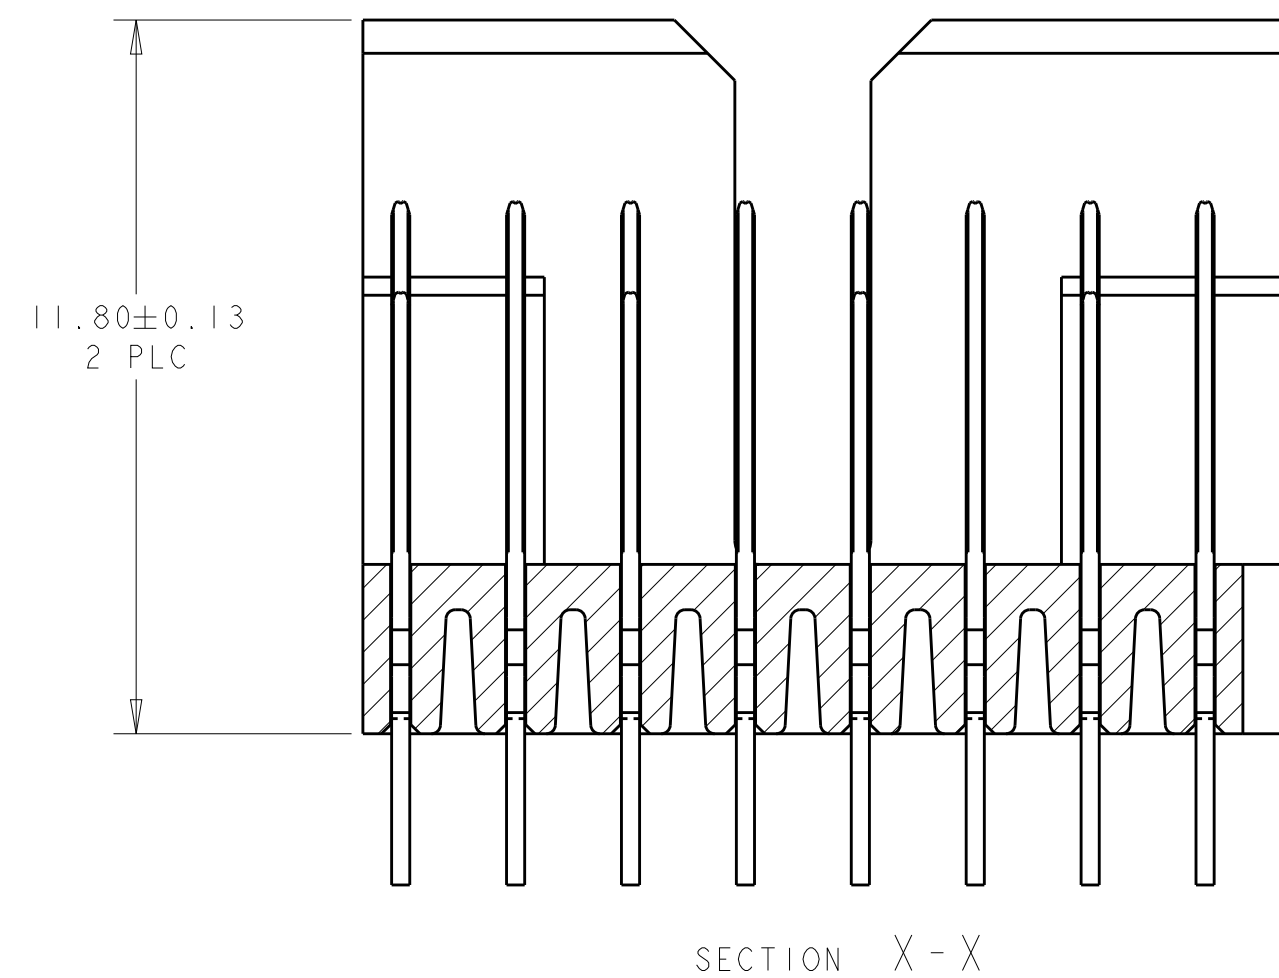
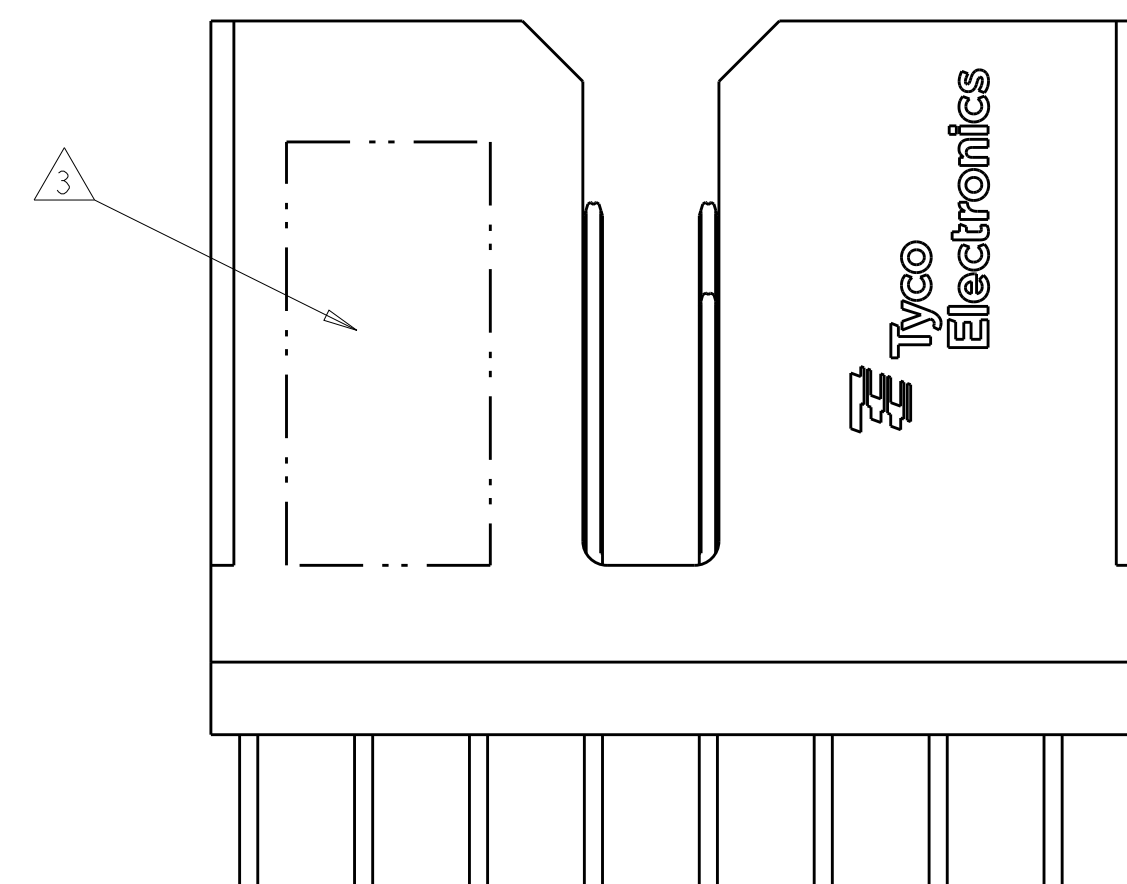
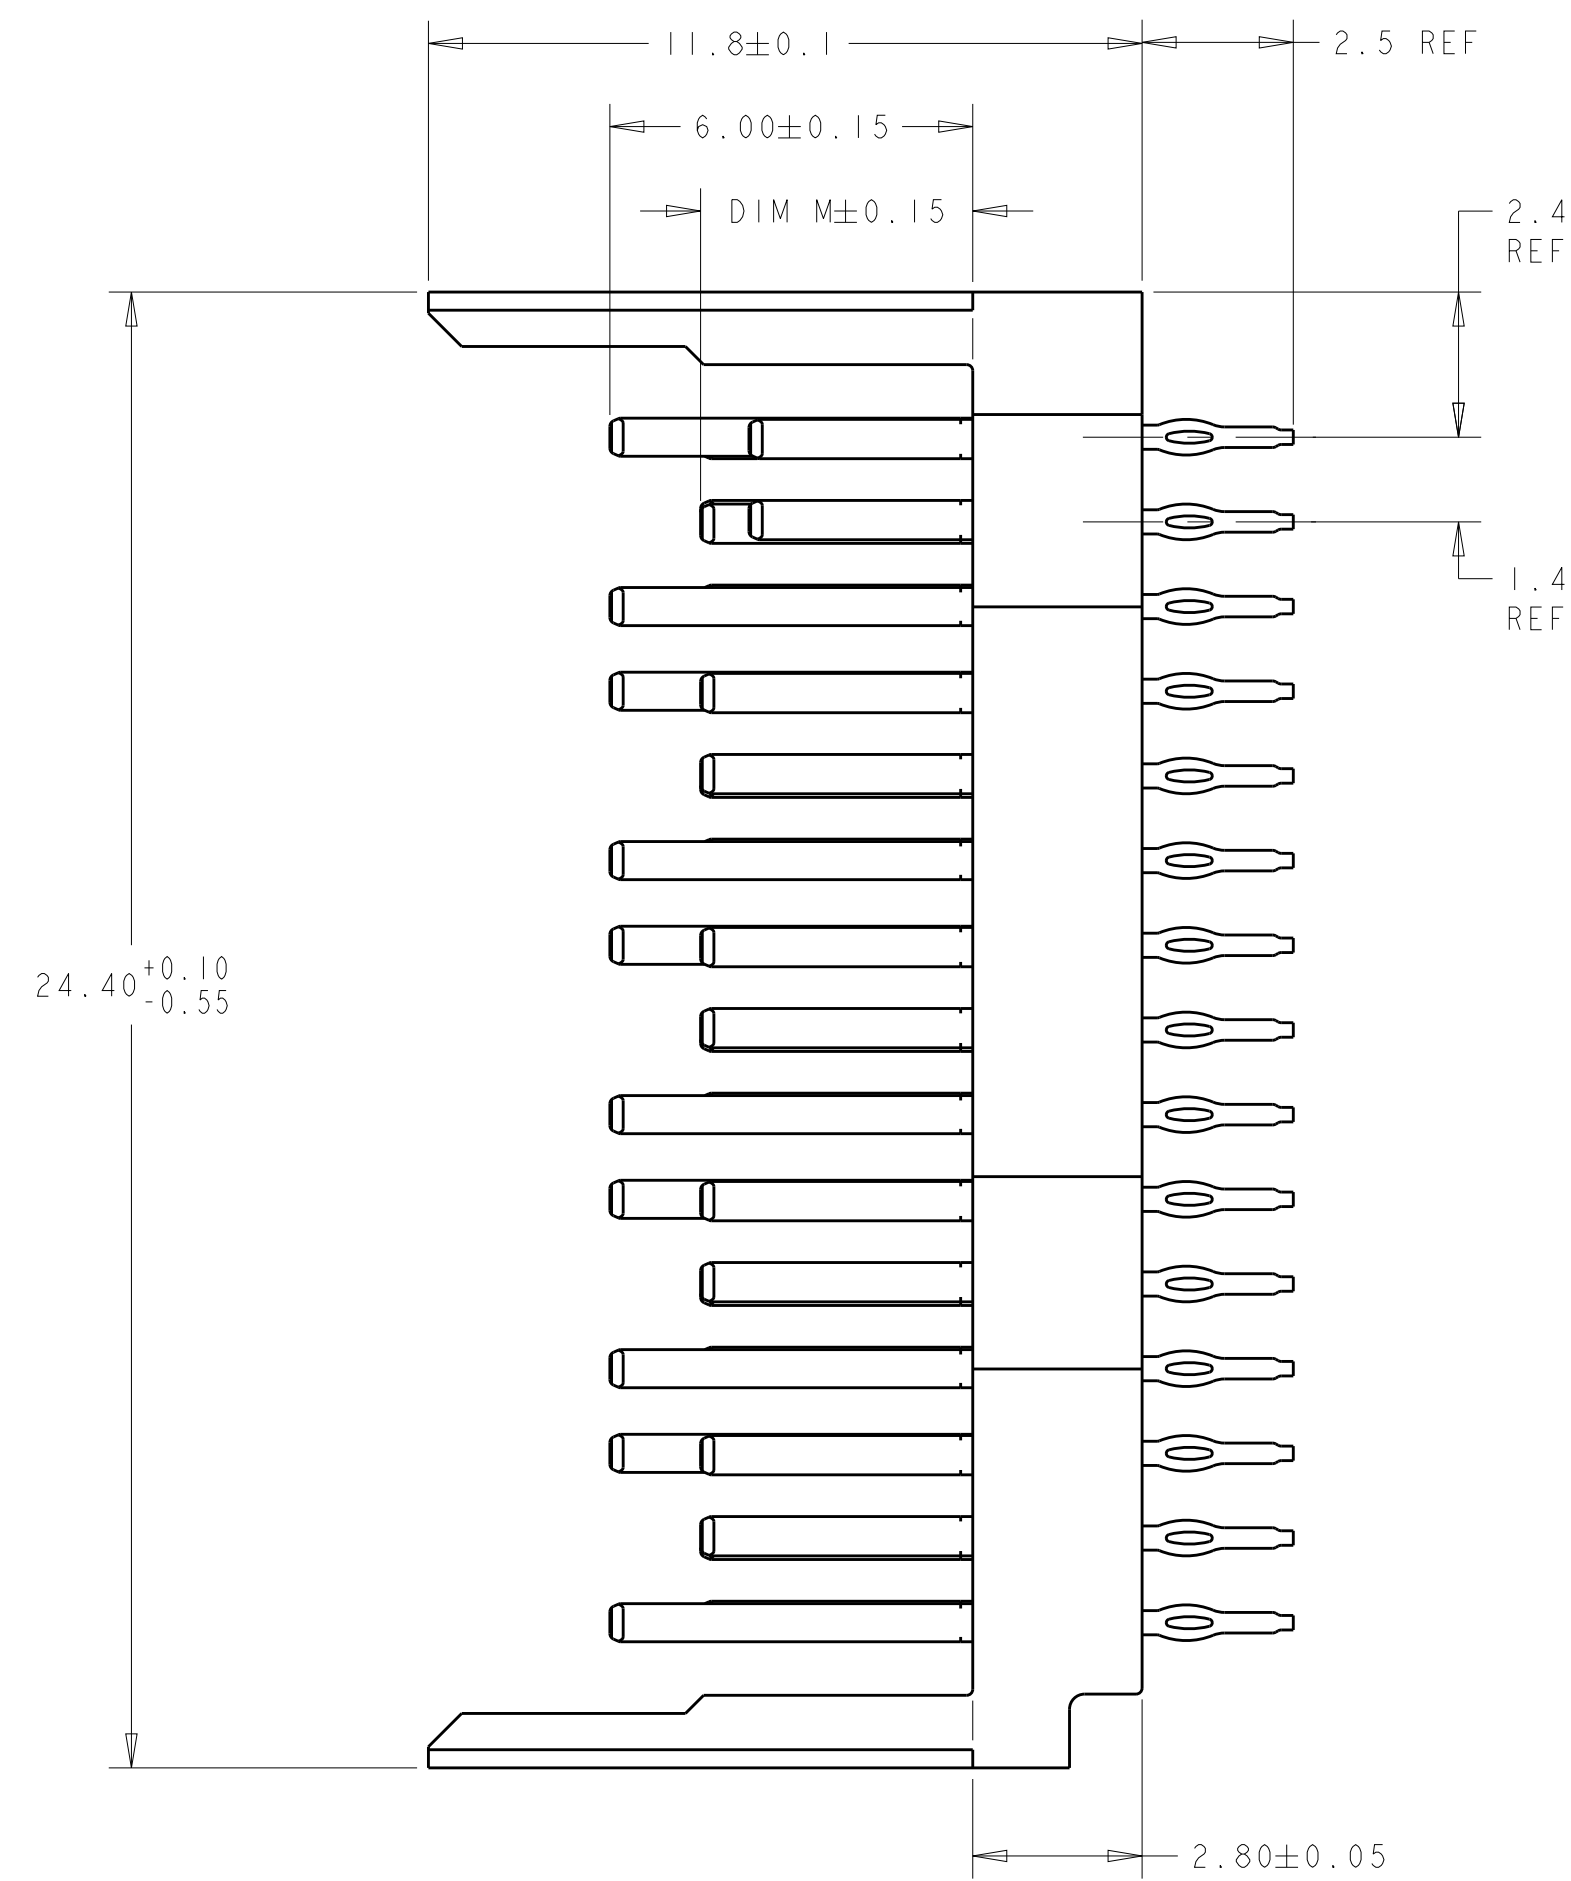
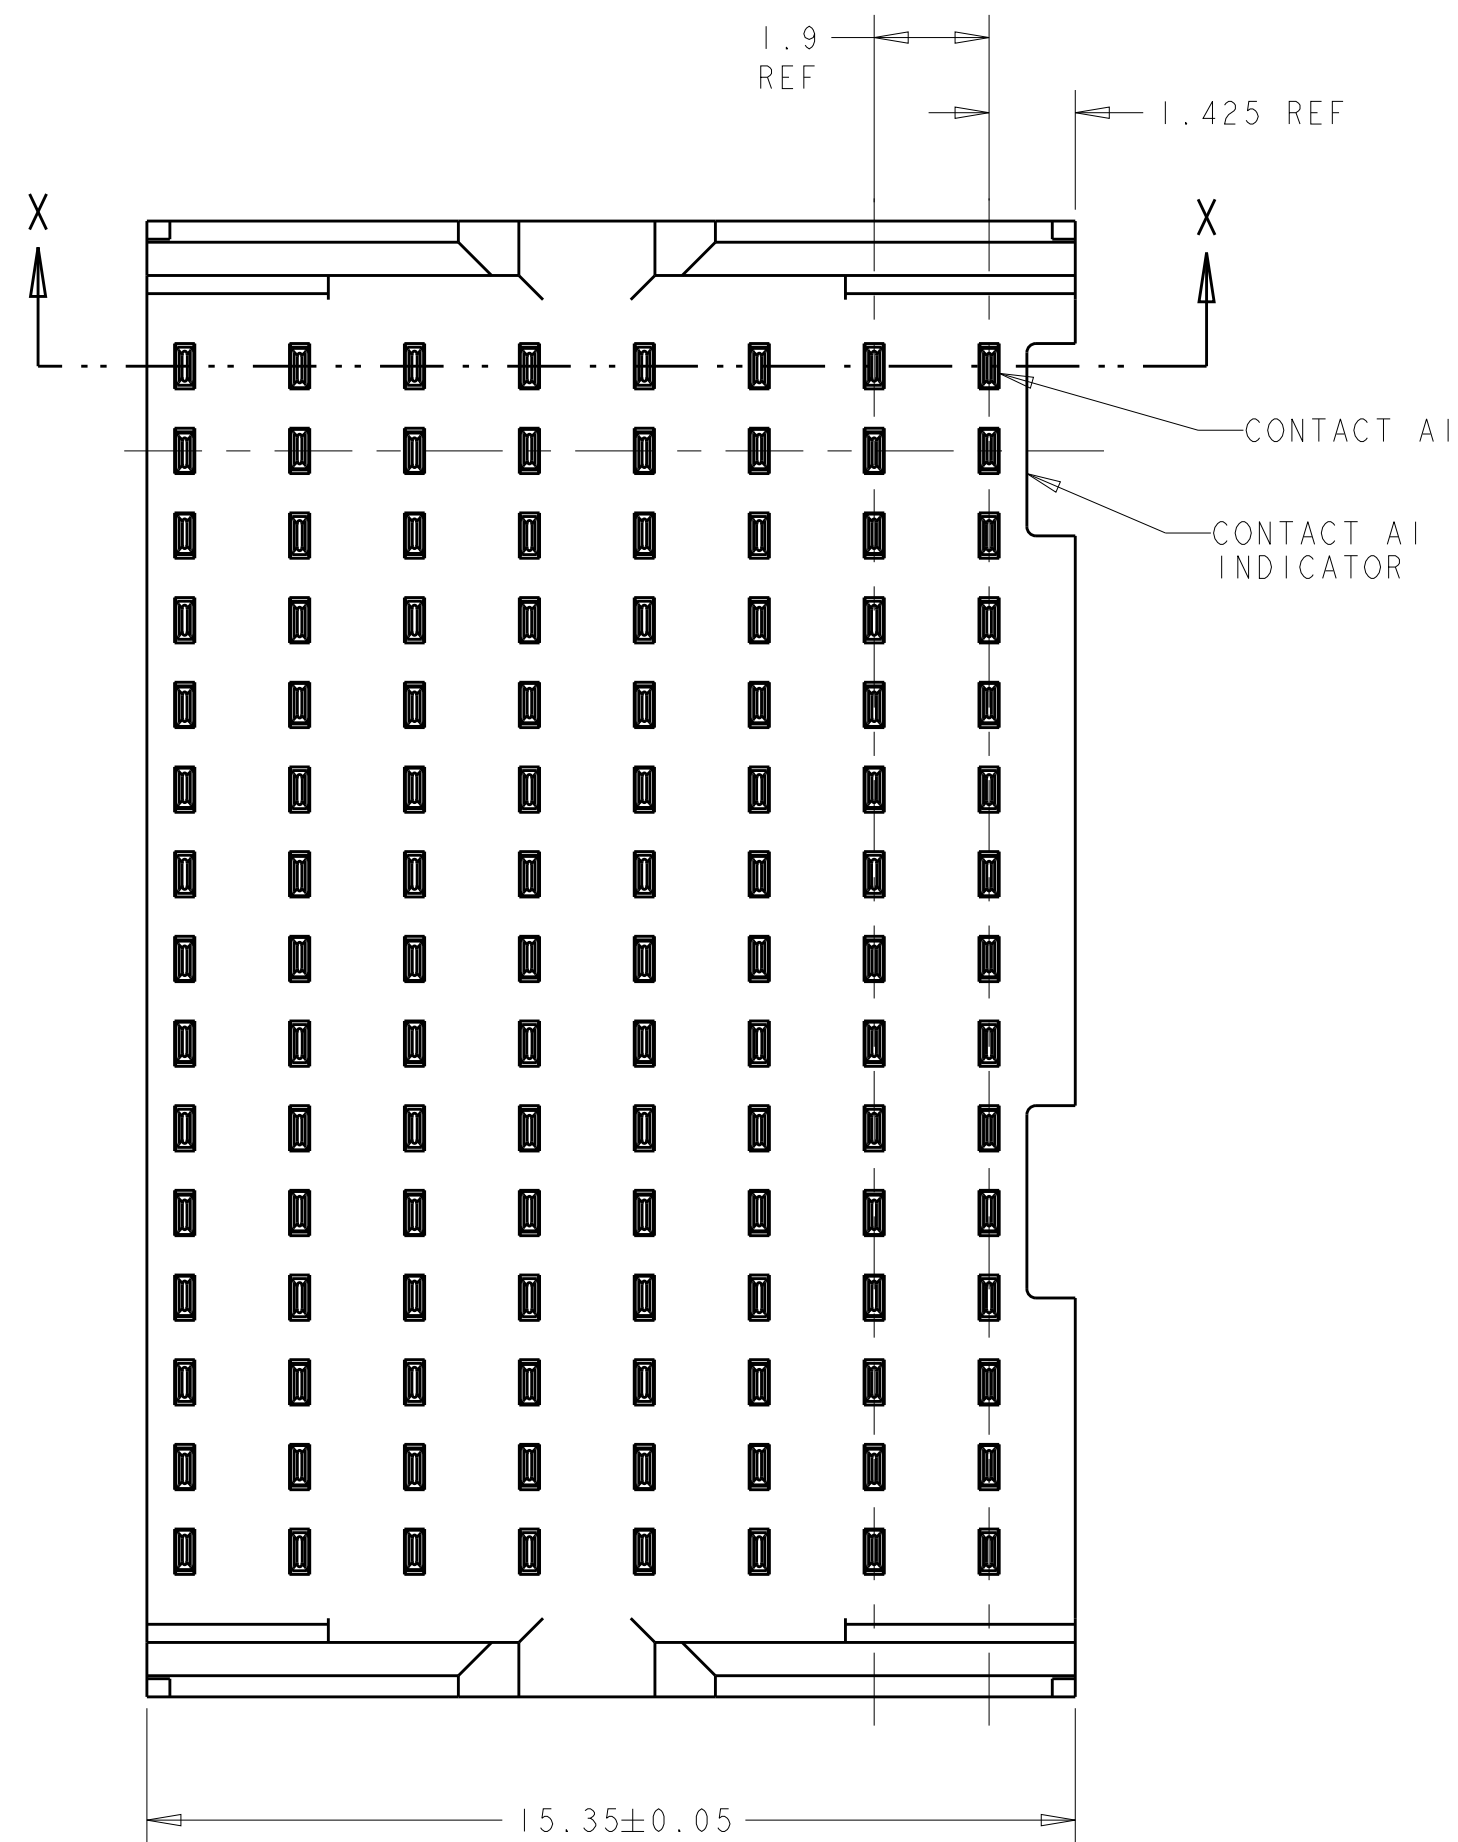




- ① MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- ② FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS
OF TE PRODUCT SPECIFICATION 108-2303; BASED ON
TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY
LEVEL III APPLICATIONS IN CONTROLLED
ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- ③ CONNECTOR MARKED WITH PART NUMBER, DATE CODE
AND STANDARD IN APPROXIMATE AREA SHOWN
- ④ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY
CUSTOMER.
5. CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- ⑥ REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

CONTACT LAYOUT									
A = 4.50mm (DIM M)									
B = 3.70mm (DIM M)									
G = GROUND 6.00mm									
		COLUMNS							
ROWS		8	7	6	5	4	3	2	1
	A	G	A	G	A	G	A	G	B
	B	A	A	A	A	A	A	A	B
	C	A	G	A	G	A	G	A	G
	D	G	A	G	A	G	A	G	A
	E	A	A	A	A	A	A	A	A
	F	A	G	A	G	A	G	A	G
	G	G	A	G	A	G	A	G	A
	H	A	A	A	A	A	A	A	A
	I	A	G	A	G	A	G	A	G
	J	G	A	G	A	G	A	G	A
	K	A	A	A	A	A	A	A	A
	L	A	G	A	G	A	G	A	G
	M	G	A	G	A	G	A	G	A
	N	A	A	A	A	A	A	A	A
	O	A	G	A	G	A	G	A	G

2065799-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 06APHZ009 CHB R. CARRO R. PATTERSON 06APHZ009 APVD R. PATTERSON 06APHZ009		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME HEADER ASSEMBLY, OPEN ENDED, 5 PAIR, 8 COLUMN, SHORT PIN SELECT LOAD, NOTCHED WALL	
MATERIAL 		FINISH 		SIZE CAGE CODE DRAWING NO. RESTRICTED TO A1 00779 C=2065799	
		WEIGHT - CUSTOMER DRAWING		SCALE 8:1 SHEET 1 OF 1 REV C	