


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [74981-1014](#)

Status: **Active**

Overview: VHDM-HSD™ Backplane Connectors

Description: VHDM-HSD™ Backplane Header, 2.00mm Pitch, 6-Row, Guide Pin Signal Module, Shield End Version, 40 Circuits, Pin Length 5.15mm. Series:74984 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm

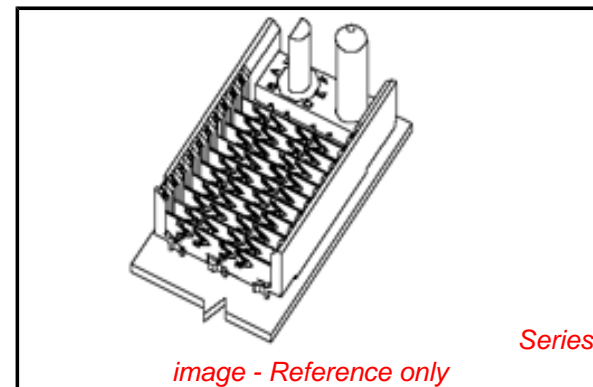

Documents:

[Drawing \(PDF\)](#)

[Product Specification PS-74031-999 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [74981](#)
Application Backplane
Application Tooling Documents TM-622010999
Comments Keying Orientation A
Component Type PCB Header
Overview [VHDM-HSD™ Backplane Connectors](#)
Product Name VHDM-HSD™
UPC 822350649636

Physical

Circuits (Loaded) 40
Circuits (maximum) 40
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part Yes
Material - Metal Copper-Nickel-Silicon, High Performance Alloy (HPA), Stainless Steel

Material - Plating Mating Gold
Material - Plating Termination Matte Tin
Material - Resin High Temperature Thermoplastic
Net Weight 8.076/g
Number of Columns 10
Number of Pairs Open Pin Field
Number of Rows 6
Orientation Vertical
PC Tail Length 2.50mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.80mm
Packaging Type Tube
Pitch - Mating Interface 2.00mm
Pitch - Termination Interface 2.00mm
Plating min - Mating 0.762µm
Plating min - Termination 0.762µm
Polarized to PCB Yes

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Low-Halogen Status
Not Reviewed**

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[74981Series](#)

Mates With

[74880 VHDMHSD Daughtercard](#)

Use With

Daughtercard Modules

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

| Description | Product # |
|--|----------------------------|
| Signal Pin Inserter | 0622015700 |
| Repair Tool | |
| Signal Header, 6-Row by 10-Wide, 20.00mm | 0622020216 |

| | |
|--------------------------------|------------------------------|
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | -55°C to +105°C |
| Termination Interface: Style | Through Hole - Compliant Pin |

Electrical

| | |
|-------------------------------|------------------|
| Current - Maximum per Contact | 2.0A |
| Data Rate | 5.0 Gbps |
| Shielded | No |
| Voltage - Maximum | 120V AC (RMS)/DC |

Material Info

Reference - Drawing Numbers

| | |
|-----------------------|--------------|
| Product Specification | PS-74031-999 |
| Sales Drawing | SD-74981-010 |

VHDM-HSD is a trademark of Amphenol Corporation

This document was generated on 04/28/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION