

# PolySwitch® PTC Devices

## Overcurrent Protection Device

**PRODUCT: RXEF040S**

DOCUMENT: SCD26111  
REV LETTER: F  
REV DATE: FEBRUARY 06, 2012  
PAGE NO.: 1 OF 1

### Specification Status: Released

**Electrical Rating**

Voltage: 72 V max (AC or DC)  
Current: 40 A max (AC or DC)


**Insulating Material:**


Cured, Flame Retardant Epoxy Polymer  
meets UL94 V-0 Requirements


**Lead Material:**

24 AWG Tin Plated Copper Clad Steel

**Marking:**

— Manufacturer's Mark  
 X40 and Part Identification

 Lot Identification

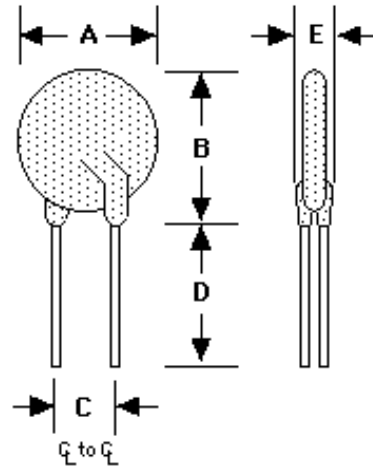

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.6	--	11.0	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.30)	--	(0.43)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS :**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION	
	AMPERES AT 20°C		OHMS AT 20°C		SECONDS AT 20°C, 2.0A	OHMS AT 20°C	WATTS AT 20°C	WATTS AT 20°C
	HOLD	HOLD   TRIP	MIN	MAX	MAX	MAX	NOMINAL	MAX
0.40	0.40	0.80	0.55	0.86	3.8	1.29	0.56	0.82

Recognitions:

UL, CSA, TUV

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

### Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Halogen Free\*

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant



\* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm.