


Dimensions: mm (In.)

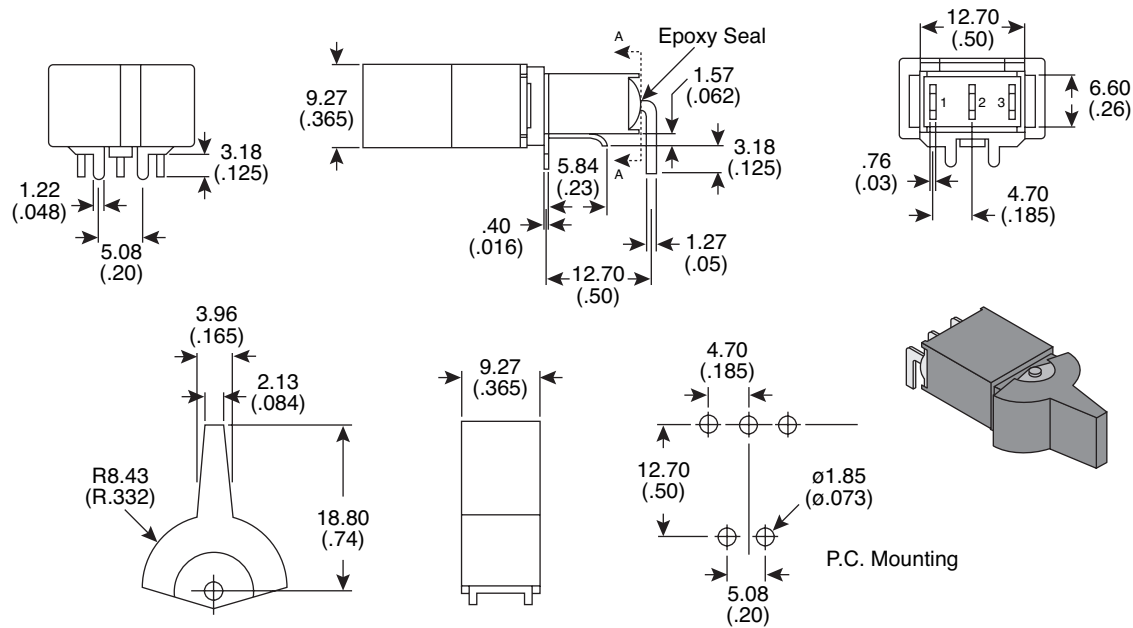

POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3		2-1
Comm. 1-2-3	OPEN	Comm. 1-2-3

Electrical Specifications:

- Rating: 2 A/ 250 VAC
5A/120 VAC or 28VDC
- Contact Resistance: 10mΩmax. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩmin.
- Dielectric Strength: 1,000 V RMS@ sea level

Mechanical Specifications:

- Mechanical Life: 30,000 make-and-break cycles.
- Operating Temperature: -30°C to 85°C

Note:

- RoHS compliant by exemption

Materials:

- Case & Bushing: glass filled nylon 6/6, flame retardant, heat stabilized
- Actuator: nylon, black std. Internal O-ring seal standard with all actuators.
- Switch Support: brass or steel, tin plated
- Terminals / Contact: silver or gold plated copper alloy
- Actuator Pivot & Mounting Bracket: nylon
- Actuator Pivot Retainer: stainless steel

Sealed Miniature Paddle Switch
103-7014-EVX

Mountain
Switch