


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		AB	REVISED PER ECR-12-013323	09AUG12	KH	TM

D

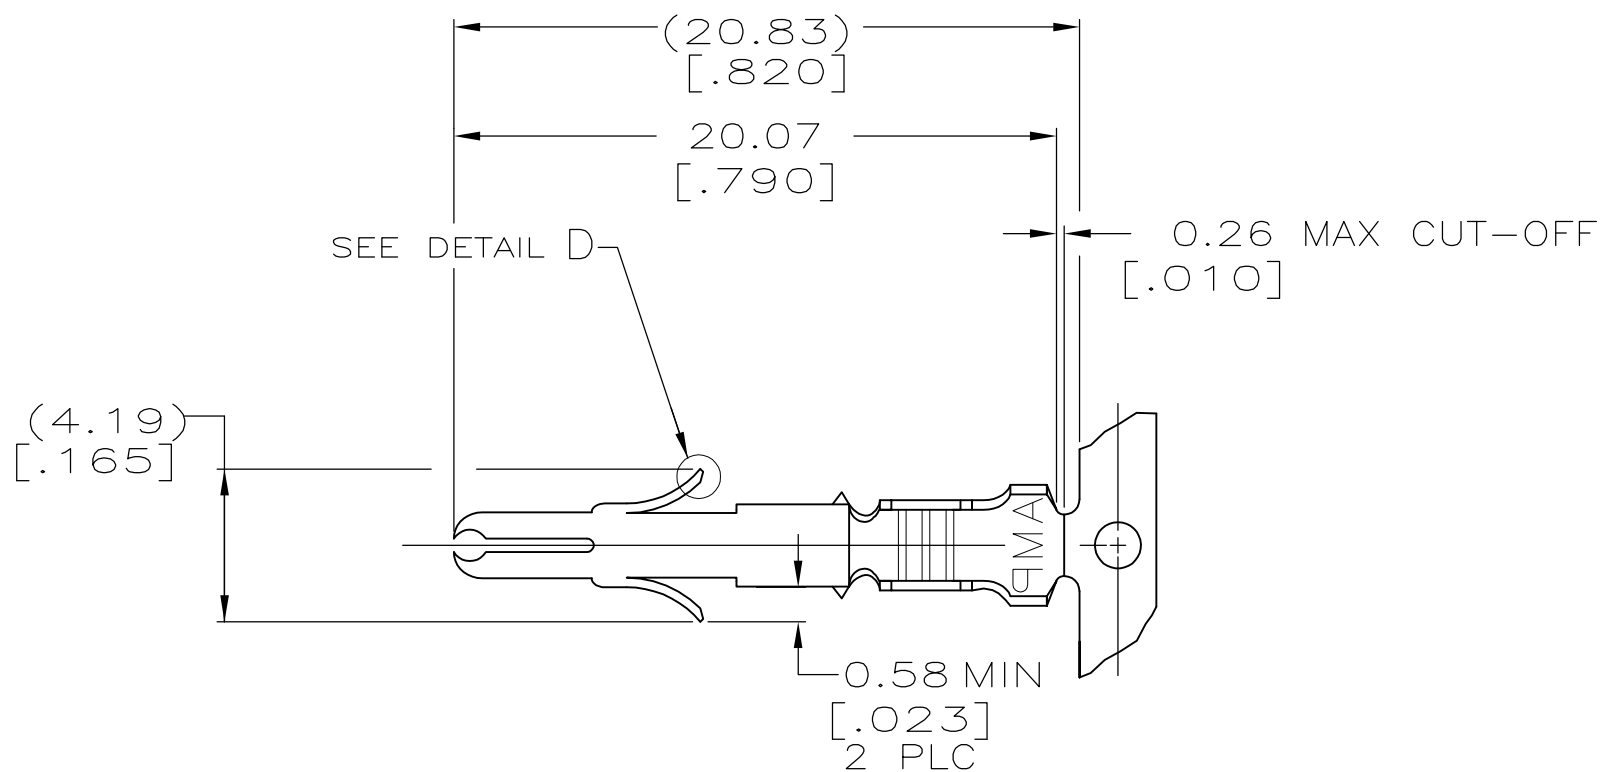

- 1

PLATED WITH 0.00076 [.000030] GOLD, OVER 0.00127 [.000050] NICKEL UNDERPLATE.
- 2


PLATED INTERNALLY WITH 0.00076 [.000030] GOLD.
- 3

WIRE RANGE 0.2-0.75 mm² (24-18 AWG).
- 4

INSULATION RANGE 1.02-2.54 [.040 -.100] DIA.


D

C

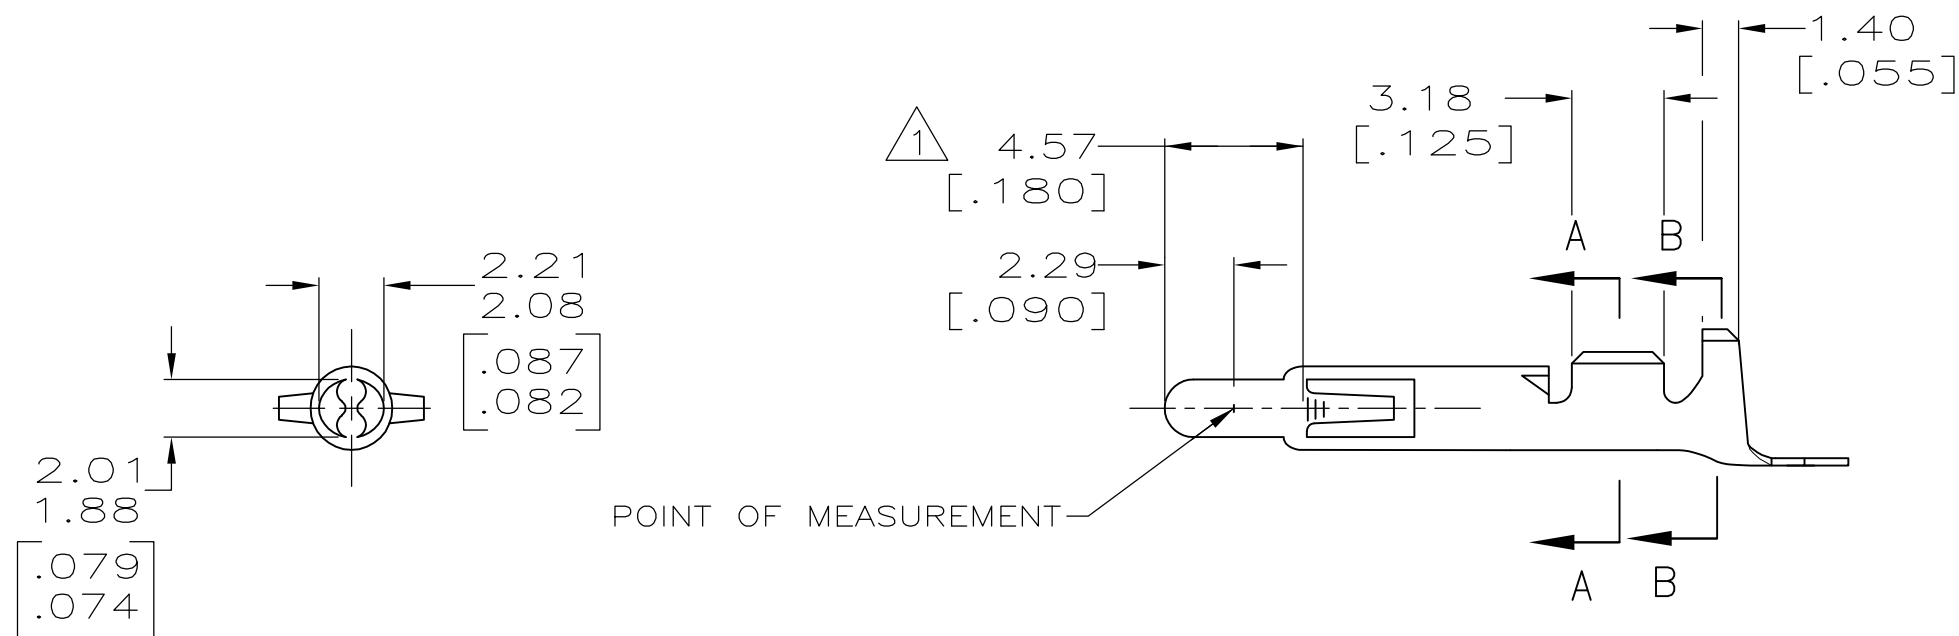


C


B

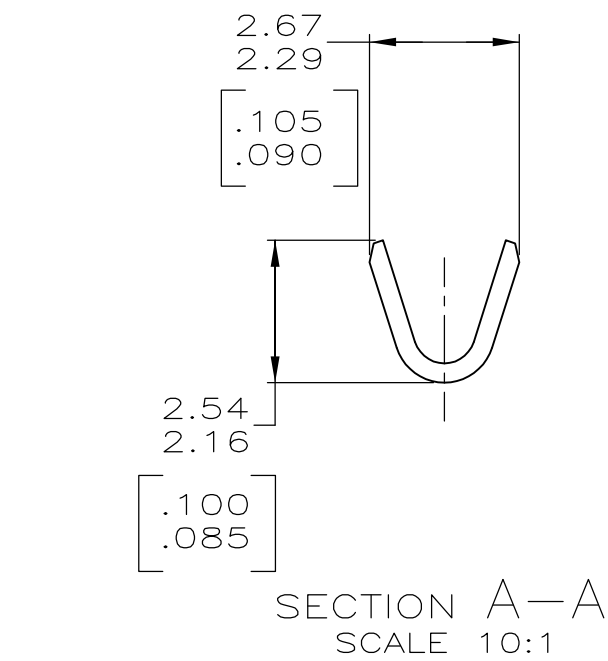

B

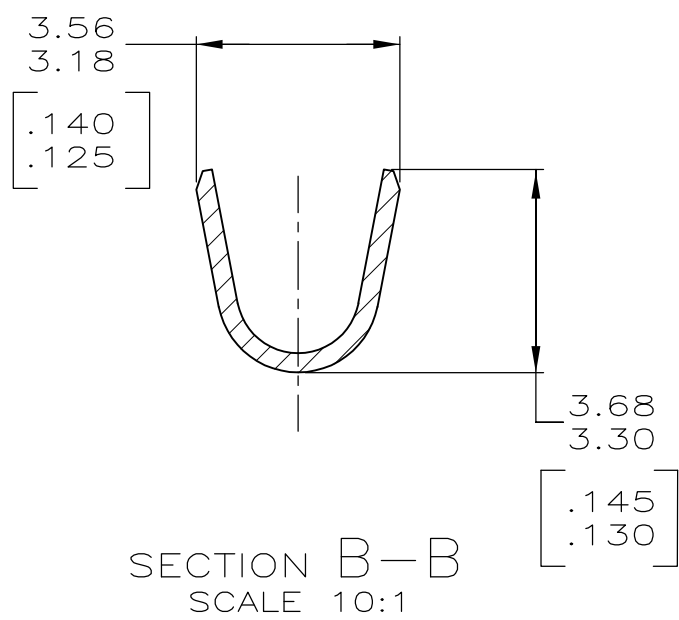

A

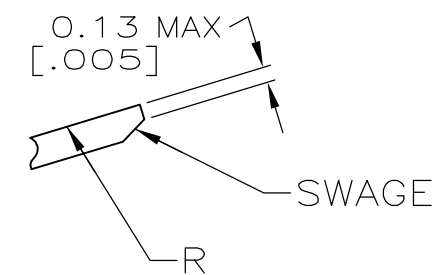

350706-7	0.30[.012] BRASS	GOLD 1	350699-7
-	0.30[.012] PH BRZ	PRE-TIN	350699-3
350706-2	0.30[.012] BRASS	GOLD 1 2	350699-2
350706-1	0.30[.012] BRASS	PRE-TIN	350699-1
LOOSE PIECE (REF)	MATERIAL	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 25-FEB-2002	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 25-FEB-2002				
		APVD S. RIDGILL 25-FEB-2002	NAME			
		PRODUCT SPEC	SPLIT PIN, UNIVERSAL MATE-N-LOK™			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC				
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE TABLE		-	A2	00779	C=350699	-
FINISH		CUSTOMER DRAWING	SCALE	SHEET	REV	
SEE TABLE			4:1	1 of 1	AB	