

5

4

3

2

1




Material:

Shielding: Copper alloy with nickel plating


Insert: NY-46, UL-94-V0, black


Contact: -Alloy, C5210, selective gold plating
over nickel in contact area
-Tin plating over nickel in solder area

A-A

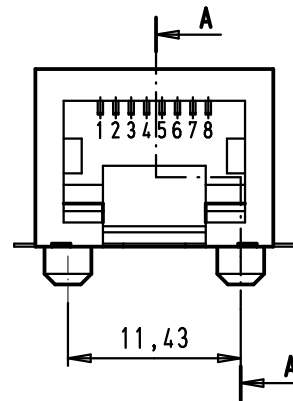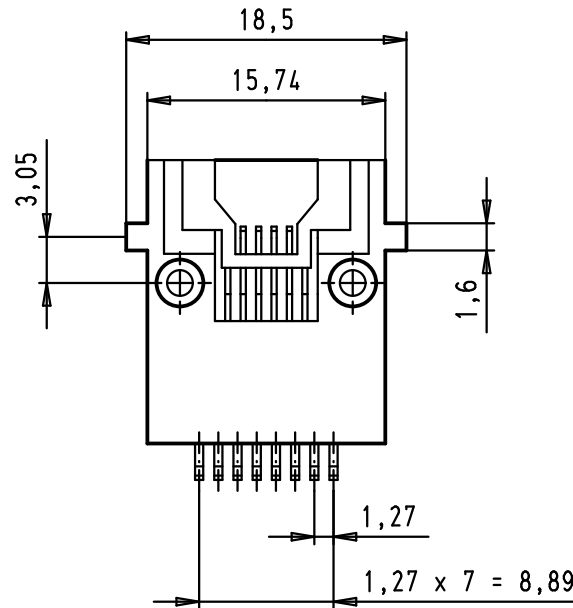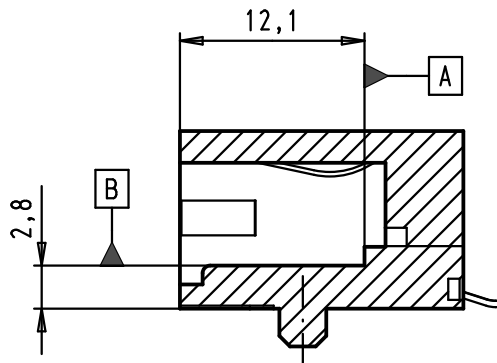

PCB layout, component side

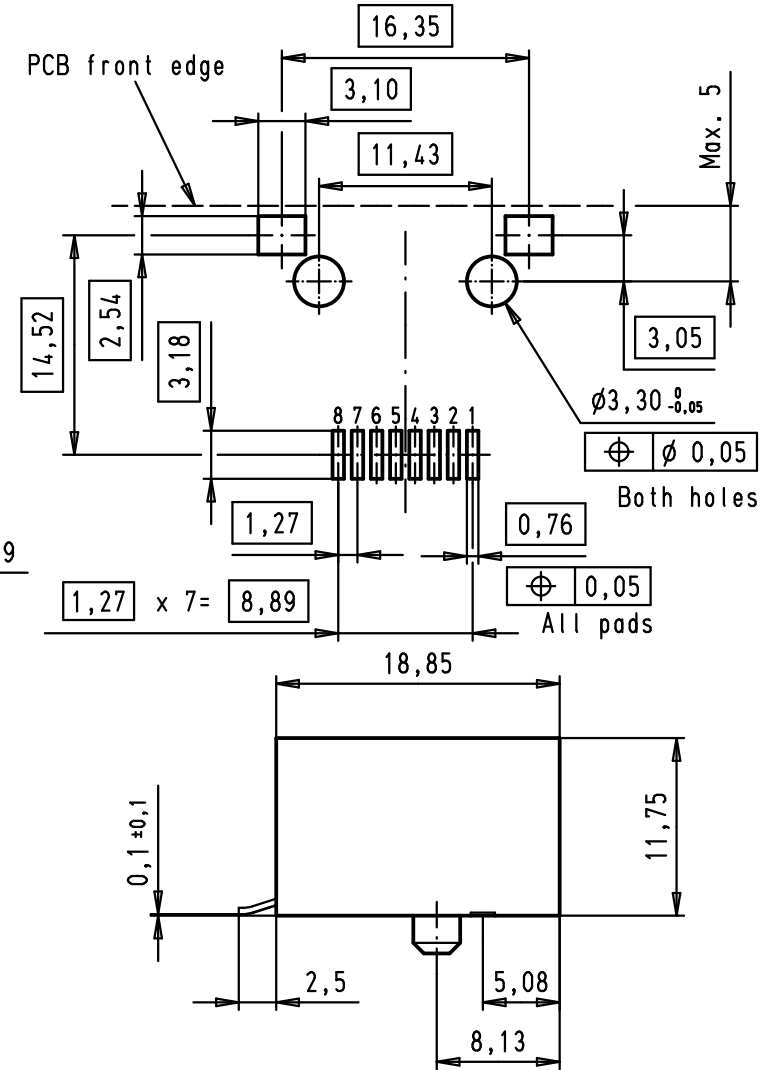

36299	20/04/12	SD		Dat.	Name		HARTING RJ Industrial® RJ 45 Jack with 8 SMT signal terminations and 2 grounding SMT terminations	Maßstab/ Scale 2:1
35070	06/08/08	PK	Detail.	31/03/04	JH			
34885	21/02/08	LP	Insp.	31/03/04	JMV			
33468	10/05/06	JFB	Stand.					
32489	15/12/04	JFB	HARTING EURL F-95972 Paris				TB 09 45 551 1100	Blatt/ Page 1 / 1
31884	31/03/04	JH						
Mod.	Dat.	Name						
						Sub.		