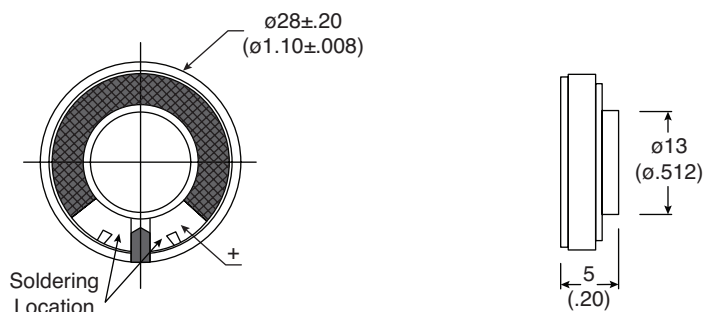
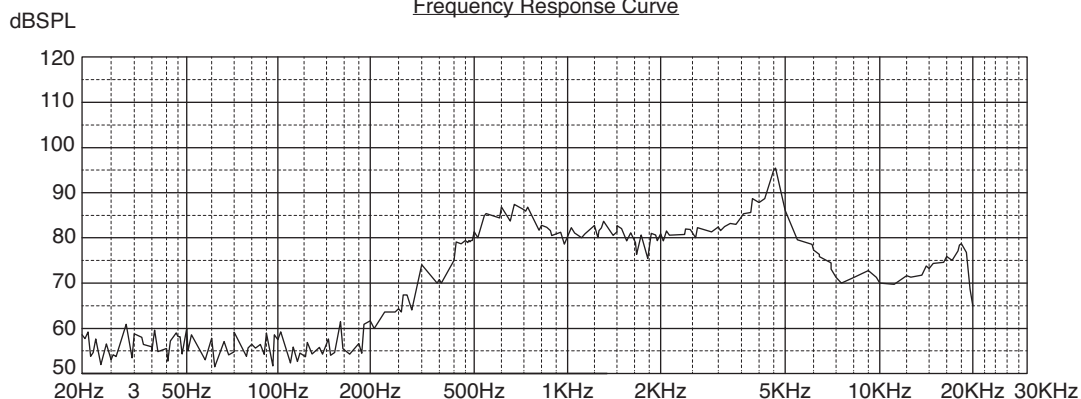


Part Number:

254-PS2832-RO

Frequency Response Curve

KT-400560

Electrical Specifications:

- Nominal Impedance: $32\Omega \pm 15\%$ at 1400Hz
- Power Rating: Normal 0.2W, Maximum 0.5W
- Lowest Resonant Frequency: $650 \pm 150\text{Hz}$
- Output Sound Pressure Level: $81 \pm 3\text{dB}/0.2\text{Watt } 0.5\text{Meter}$
Average at 800, 1000, 1200, 1500Hz
- Frequency Range: 350~8000Hz, Average SPL -10dB

Mechanical Specifications:

- Operating Temperature: -25°C to $+50^{\circ}\text{C}$
- Storage Temperature: -25°C to $+55^{\circ}\text{C}$

Materials:

- Magnet: NdFeB
- Weight: Approx 5.8 Grams

Notes:

- RoHS Compliant