




5	6	7	8
REV. B	ECN NO. LEN15C0482~485	DATE 2015/12/21	SIGN Vicky
			DESCRIPTION Update Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

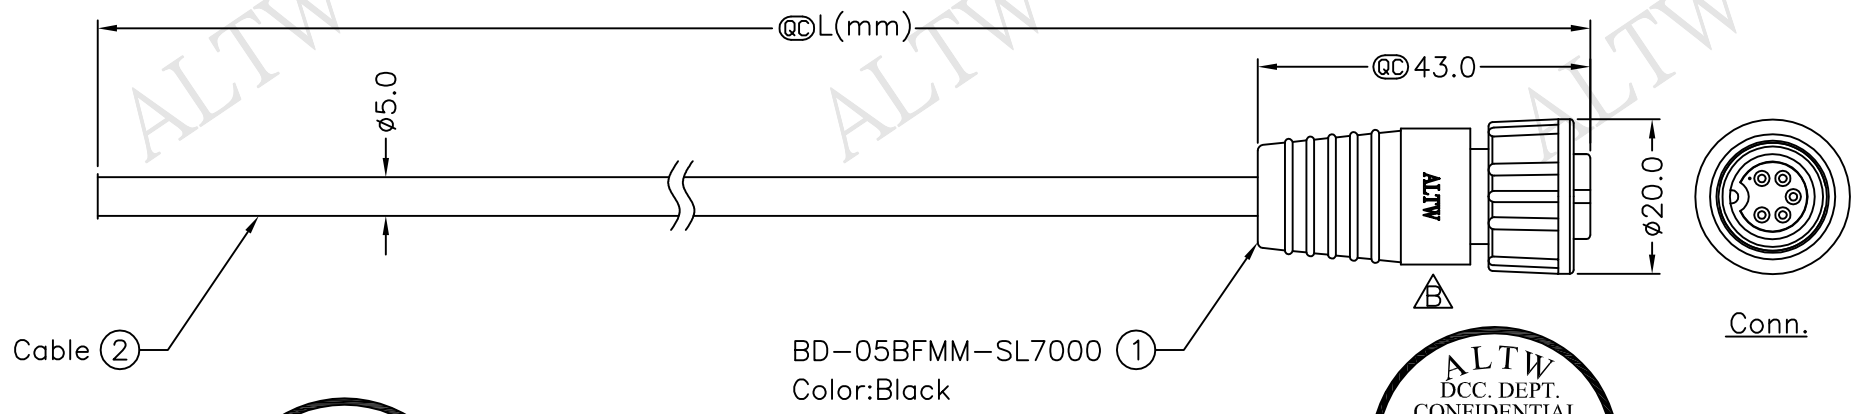

BD-05BFMM-SL7AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*5C+D+Al/My, PVC Jacket, UV Resistant, OD=5.0mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard Cable Screw 5Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
@C :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2015/12/21
DWG NO BD-05BFMM-SL7AXX	CHECKED BY Rita	DATE 2015/12/21
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/12/21