


PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0760559208](#)  
**Status:** **Active**  
**Overview:** [Impact™ Backplane Connectors and Cable Assemblies](#)  
**Description:** Impact™ 100 Ohm 5 Pair Vertical Backplane Header, Right Guided, Left Endwall, 12 Columns, 180 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

**Documents:**  
[3D Model](#)  
[Drawing \(PDF\)](#)  
[Product Specification PS-76060-999 \(PDF\)](#)  
[Application Specification AS-76060-990 \(PDF\)](#)  
[Application Specification AS-76060-9999 \(PDF\)](#)  
[Packaging Specification PK-70873-759 \(PDF\)](#)  
[RoHS Certificate of Compliance \(PDF\)](#)

|                                |                                                                   |
|--------------------------------|-------------------------------------------------------------------|
| <b>Agency Certification</b>    |                                                                   |
| UL                             | E29179                                                            |
| <b>General</b>                 |                                                                   |
| Product Family                 | Backplane Connectors                                              |
| Series                         | <a href="#">76055</a>                                             |
| Application                    | Conventional, Mezzanine                                           |
| Application Tooling Documents  | TM-622018799                                                      |
| Component Type                 | PCB Header                                                        |
| Overview                       | <a href="#">Impact™ Backplane Connectors and Cable Assemblies</a> |
| Product Name                   | Impact™                                                           |
| UPC                            | 884982519633                                                      |
| <b>Physical</b>                |                                                                   |
| Circuits (Loaded)              | 180                                                               |
| Circuits (maximum)             | 180                                                               |
| Color - Resin                  | Black                                                             |
| Durability (mating cycles max) | 200                                                               |
| First Mate / Last Break        | No                                                                |
| Flammability                   | 94V-0                                                             |
| Guide to Mating Part           | Yes                                                               |
| Keying to Mating Part          | None                                                              |
| Material - Metal               | High Performance Alloy (HPA)                                      |
| Material - Plating Mating      | Gold                                                              |
| Material - Plating Termination | Tin                                                               |
| Material - Resin               | High Temperature Thermoplastic                                    |
| Net Weight                     | 7.535/g                                                           |
| Number of Columns              | 12                                                                |
| Number of Pairs                | 5                                                                 |
| Number of Rows                 | 15                                                                |
| Orientation                    | Vertical                                                          |
| PC Tail Length                 | 1.40mm                                                            |
| PCB Locator                    | No                                                                |
| PCB Retention                  | Yes                                                               |
| PCB Thickness - Recommended    | 1.00mm                                                            |
| Packaging Type                 | Tray                                                              |
| Pitch - Mating Interface       | 1.90mm                                                            |
| Pitch - Termination Interface  | 1.90mm                                                            |
| Plating min - Mating           | 0.762µm                                                           |
| Polarized to PCB               | Yes                                                               |
| Stackable                      | No                                                                |
| Temperature Range - Operating  | -55°C to +85°C                                                    |
| Termination Interface: Style   | Through Hole - Compliant Pin                                      |

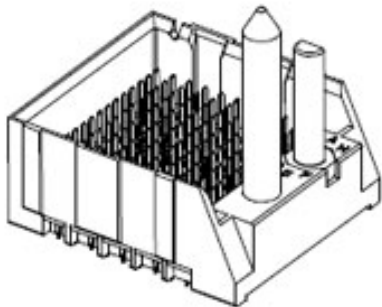

Series image - Reference only

**EU ELV**  
**Not Relevant**

**EU RoHS**  
**Compliant**  
**REACH SVHC**  
Not Contained Per  
-ED/79/2015 (17  
December 2015)  
**Halogen-Free**  
**Status**  
**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS      Green Image  
ELV                Not Relevant

**Search Parts in this Series**  
[76055](#) Series

**Mates With**  
[76060](#) Impact™ 100 Ohm Daughtercard

| <b>Application Tooling   FAQ</b>                                                                                                                                                       |                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i> |                            |
| <b>Global</b>                                                                                                                                                                          |                            |
| Description                                                                                                                                                                            | Product #                  |
| Press-In Tool for Backplane Signal Module, 5-Pair by 12-Column                                                                                                                         | <a href="#">0622018708</a> |
| Backplane Header Removal Tool for GbX® U-Series, GbX                                                                                                                                   | <a href="#">0621009610</a> |

**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.75A           |
| Data Rate                     | 25.0 Gbps       |
| Impedance                     | 100#            |
| Shield Type                   | N/A             |
| Shielded                      | No              |
| Voltage - Maximum             | 30V AC (RMS)/DC |

**Solder Process Data**

|                             |     |
|-----------------------------|-----|
| Lead-freeProcess Capability | N/A |
|-----------------------------|-----|

**Material Info**

**Reference - Drawing Numbers**

|                           |                             |
|---------------------------|-----------------------------|
| Application Specification | AS-76060-990, AS-76060-9999 |
| Packaging Specification   | PK-70873-759                |
| Product Specification     | PS-76060-999                |
| Sales Drawing             | SD-76055-003                |
| Symbol/Footprint Data     | SYM-76055-9208              |

I-Trac™, Impact™,  
or Z-PACK Tinman\*  
Impact™ Backplane [0622018872](#)  
Press-In Tool

This document was generated on 06/09/2016

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**