

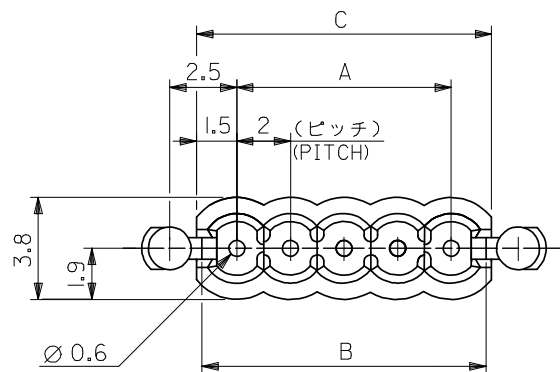



電線挿入図
SECT.(CABLE ASS'Y)

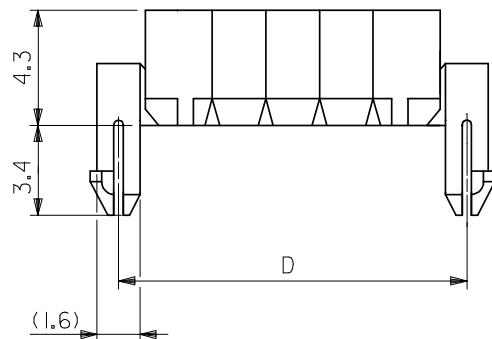


注記
NOTES

- 材料: ナイロン66、UL94V-2
MATERIAL: NYLON66, UL94V-2
- 適合電線: 2mmピッチリボンケーブル
AWG#26 錫コート平行線
APPLICABLE WIRE: 2mm PITCH
RIBBON CABLE WIRE
AWG#26, TOP COATED WIRE

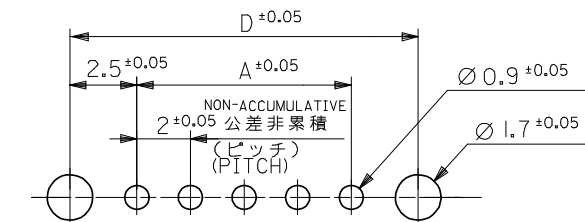

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.
(t=1.6±0.05)

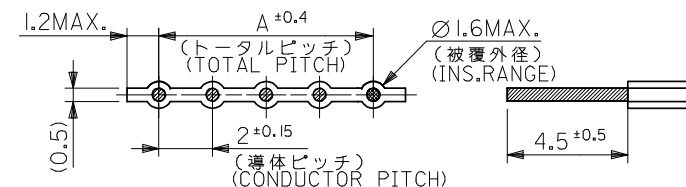

適合電線推奨寸法
RECOMMENDED WIRE DIM.

37	35	34.6	32	VO	51048-1700	17
35	33	32.6	30	VO	1600	16
33	31	30.6	28	VO	1500	15
31	29	28.6	26	VO	1400	14
29	27	26.6	24	VO	1300	13
27	25	24.6	22	VO	1200	12
25	23	22.6	20	VO	1100	11
23	21	20.6	18	VO	1000	10
21	19	18.6	16	VO	0900	9
19	17	16.6	14	VO	0800	8
17	15	14.6	12	VO	0700	7
15	13	12.6	10	VO	0600	6
13	11	10.6	8	VO	0500	5
11	9	8.6	6	VO	0400	4
9	7	6.6	4		-0300	3
7	5	4.6	2	VO	51048-0200	2
D	C	B	A	ENG. NO.		極数 CKTS.

REVISED EC NO: J2008-1332 DRWN: NAKAMURA 2008/03/31 CHKD: T. HARUYAMA 2008/04/22 APPR: NUKITA 2008/04/22	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
				MM ONLY		5:1	METRIC			
		10 UNDER	± 0.2	DRAWN BY T. ITOH		DATE		TITLE 2.0 CABLE HOLDER (FOR 4.5 STRIP LENGTH)		
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA		DATE '92/02/27				
		30 OVER	± 0.3	APPROVED BY M. ENOMOTO		DATE '92/02/27		molex MOLEX INCORPORATED		
	ANGULAR ±3 °	MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
	REV	B	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51048-001		1 OF 1	
SIZE A3					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					