


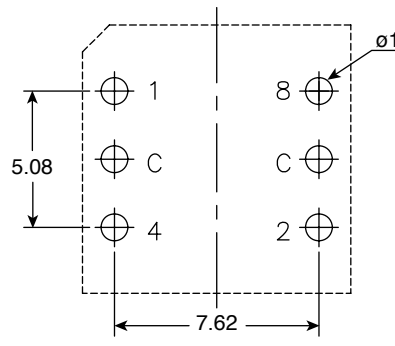



DIMENSIONS: mm

101-H3B16-EV

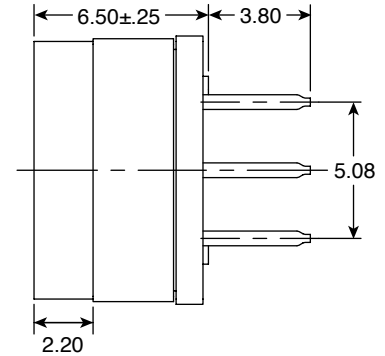

101-H3B10-EV



P.C.B. LAYOUT

Type	Circuit Characteristics															
	Code	Position									x ON					
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10 STEP	1		x		x		x		x		x					
	2			x	x			x	x							
	4					x	x	x	x							
	8									x	x					
Type	Circuit Characteristics															
	Code	Position									x ON					
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
16 STEP	1		x		x		x		x		x		x		x	
	2			x	x			x	x			x	x		x	x
	4					x	x	x	x				x	x	x	x
	8									x	x	x	x	x	x	x

Electrical Specifications:

- Rating: Non-Switching Rating 400mA/24VDC
Switching Rating 150mA/24VDC
- Initial Contact Resistance: 100mΩ Max.
- Dielectric Strength: 250VAC 1 Minute
- Insulation Resistance: 100MΩ Min. (250VDC Megger)

Mechanical Specifications:

- Operating Force: 400gf cm Max.
- Operating Temperature: -60°C to 125°C

Note:

- RoHS Compliant

Coded Rotary Switches
101-H3B10-EV, 101-H3B16-EV

