
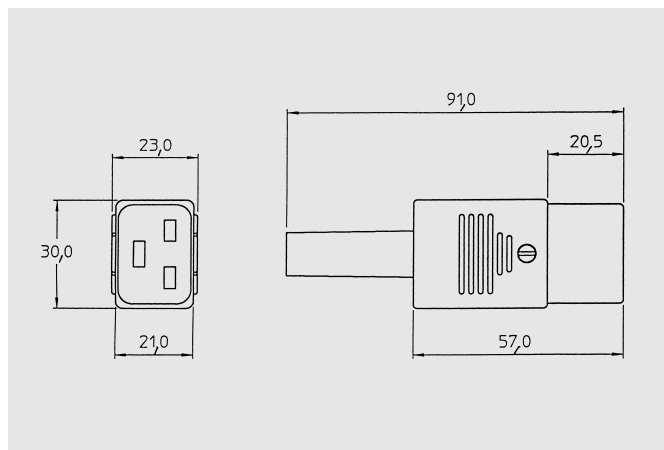


**Rewireable Connector for cable,  
straight entry  
Type 4795**

Pin temperature 70 °C  
Protection class I





Order no	Colour	Max. cable diameter	Max. wire size
4795.0000	black	10 mm	3 x 2 mm <sup>2</sup> / 14 AWG

Cord retaining clamp see page 169

**Rewireable Plug  
for cable  
straight entry  
Type 4796**

Pin temperature 70 °C  
Protection class I

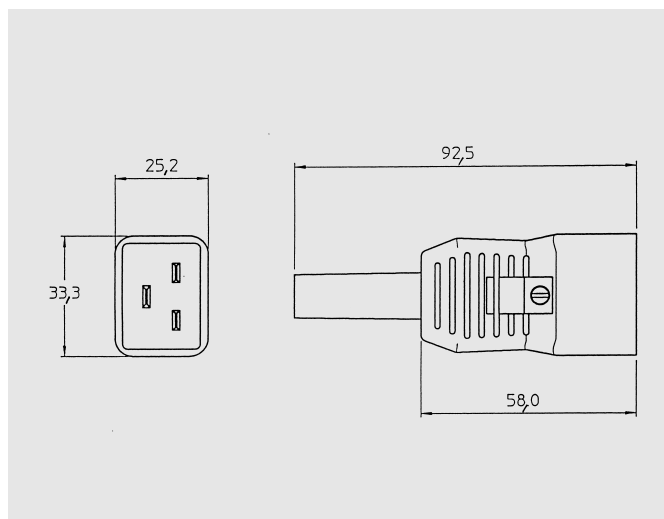

Order no	Colour	Max. cable diameter	Max. wire size
4796.0000	black	10 mm	3 x 2 mm <sup>2</sup> / 14 AWG

Cord retaining clamp see page 169

**Details Types 4795, 4796**

**Technical data**

- Rated current/voltage: 16 A/250 VAC
- Insulation resistance: > 10 MΩ (500 VDC, 1 Min.)
- Dielectric strength: 2 kV (50 Hz, 1 Min.), to accessible surfaces
- Materials:
  - Body and cable guard: Thermoplastic UL 94V-0

**Standards**

Type 4795: IEC/EN 60320-1/C19  
4796: IEC/EN 60320-2-2/I

**Approvals**

VDE (16 A / 250 VAC)  
 UL/CSA (21 A / 250 VAC)