


# MALE PCB PINS

## SOLDER TERMINALS SLOTTED

### 2715

2715-X-01-XX-00-00-07-0

Swage mount in .116 hole




| Basic Part Number | Board Thickness | Length V |
|-------------------|-----------------|----------|
| 2715-2            | .062            | .109     |
| 2715-3            | .094            | .141     |
| 2715-4            | .125            | .172     |

### 2809

2809-X-01-XX-00-00-07-0

Swage mount in .116 hole




| Basic Part Number | Board Thickness | Length V | Depth D |
|-------------------|-----------------|----------|---------|
| 2809-1            | .031            | .078     | .068    |
| 2809-2            | .062            | .109     | .098    |
| 2809-3            | .094            | .141     | .098    |
| 2809-4            | .125            | .172     | .098    |

### 2701

2701-X-01-XX-00-00-07-0


Swage mount in .116 hole



### 2808

2808-X-01-XX-00-00-07-0

Swage mount in .116 hole




| Basic Part Number | Board Thickness | Length V |
|-------------------|-----------------|----------|
| 2XXX-1            | .031            | .075     |
| 2XXX-2            | .062            | .105     |
| 2XXX-3            | .094            | .135     |
| 2XXX-4            | .125            | .165     |

### 2762

2762-4-01-XX-00-00-07-0


Swage mount in .116 hole  
For a .125 thick board



### 2807

2807-X-01-XX-00-00-07-0

Swage mount in .116 hole




| Basic Part Number | Board Thickness | Length V |
|-------------------|-----------------|----------|
| 2807-1            | .031            | .078     |
| 2807-2            | .062            | .109     |
| 2807-3            | .094            | .140     |
| 2807-4            | .125            | .171     |

### 3622

3622-0-32-15-00-00-03-0

Slotted compliant tail press-fit in .040 ± .003 plated hole. For .060" → .100" thick board

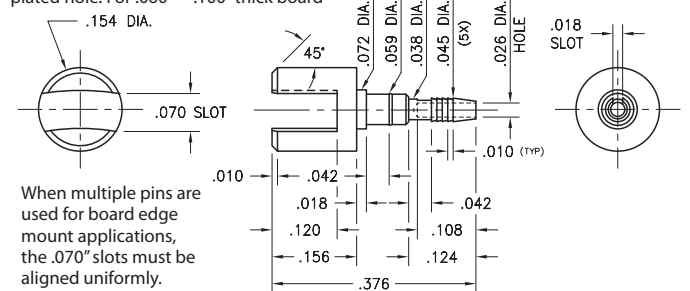

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Inches

**Tolerances On:** Lengths: ± .005  
Diameters: ± .002  
Angles: ± 2°



**ORDER CODE:** XXXX - X - XX - XX - 00 - 00 - 07 - 0

**BASIC PART #**

**Part #3622 plating ONLY**

**SPECIFY PIN FINISH:**

- 01 200 μ" TIN/LEAD OVER NICKEL
- 15 10 μ" GOLD OVER NICKEL (RoHS)
- 80 200 μ" TIN OVER NICKEL (RoHS)
- 44 300 μ" SILVER OVER COPPER (RoHS)
- 50 300 μ" ELECTRO-SOLDER (60/40 SnPb)



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com