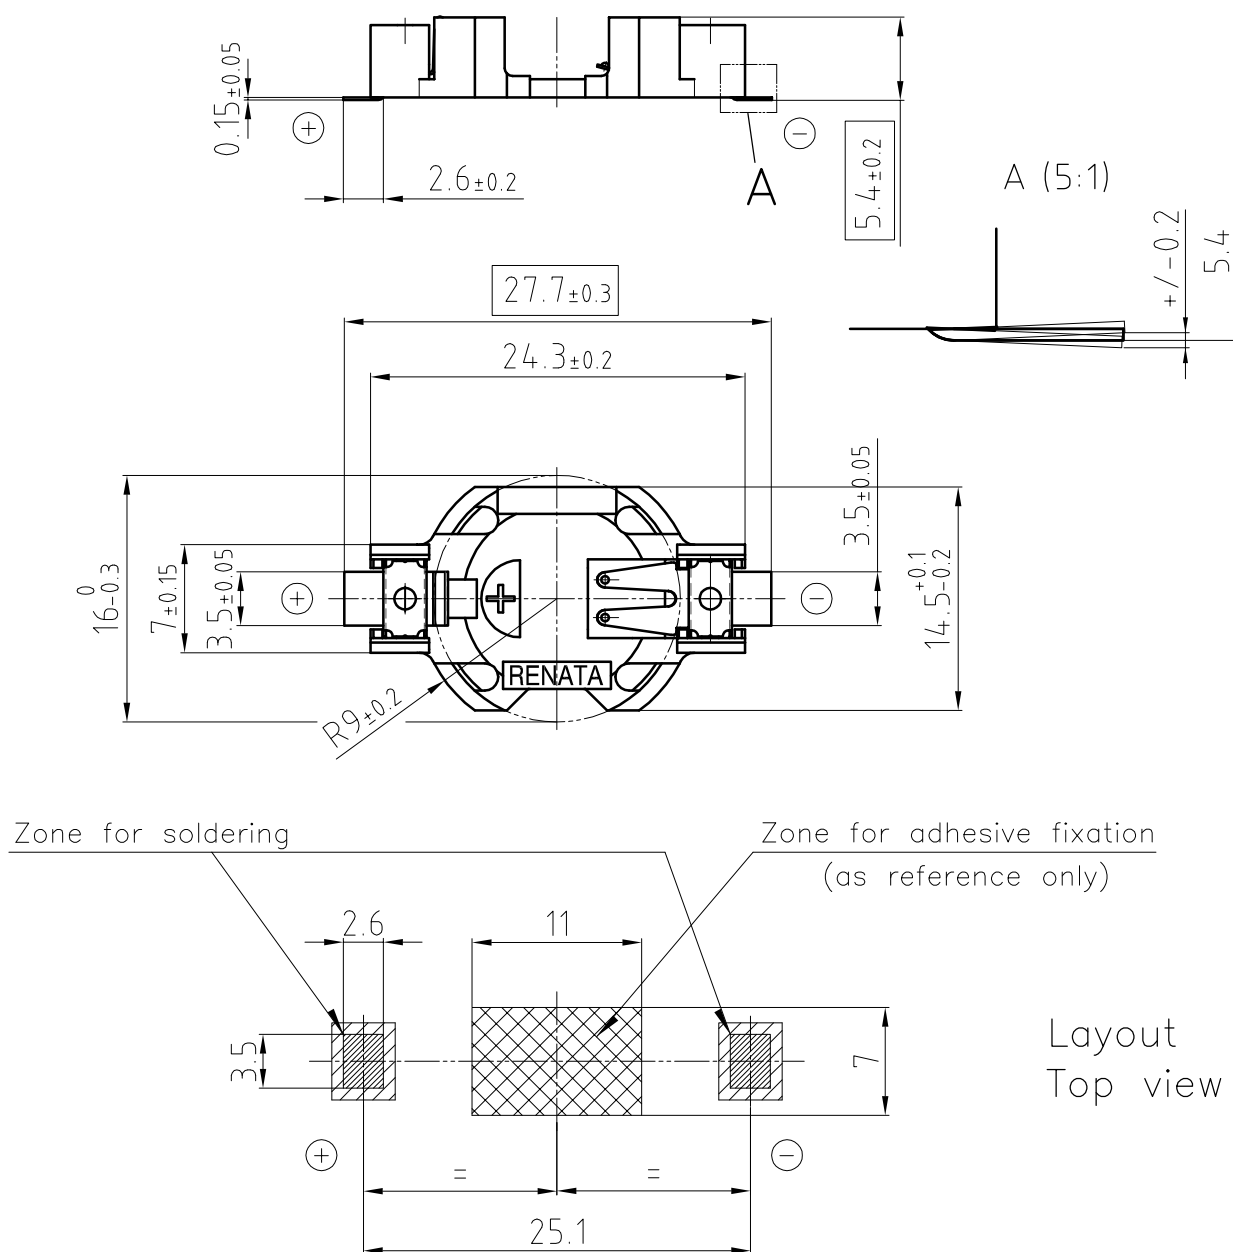


Layout
Top view

All dimensions in mm;


Holder material: heat resistant, glass-fiber reinforced LCP, flammability rating UL94 V-0;

Battery contacts: spring stainless steel 301 nickel plated throughout, min thickness 3.5um;

Solder contacts: spring stainless steel 301 solder area matte tin-plated throughout, min. thickness 5um;

Finish for solderability according to MIL-STD 883H method 2003.9.

All framed values will be used for dimension checking !

Rev.	☐			Rev.	☐				Customer's Approval			
Rev.	☐			Rev.	☐				Date			
Rev.	☐			Rev.	☐				Signature			
Titel:								Scale 2:1	Drawn	12.11.12	PWU	
SMTU1632-C									Checked			
									Approved	29.05.13	MDi	
renata  batteries								CH-4452 Itingen Switzerland		10.1004.4 -		