

10 9 8 7 6 5 4 3 2 1

F








E

D


C

B

A

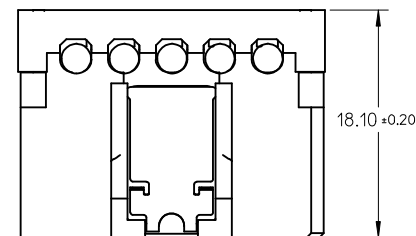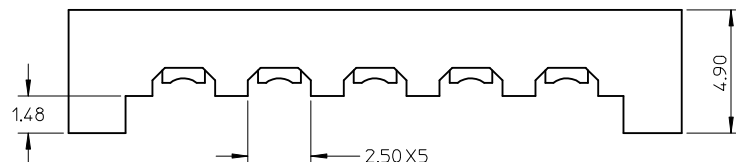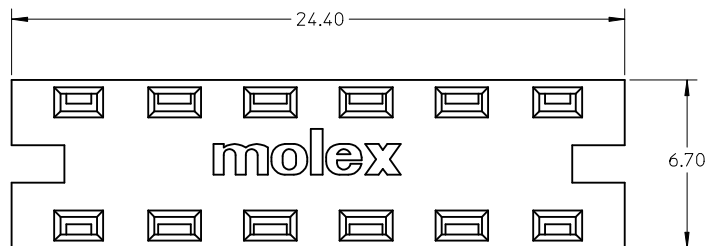

APPLICATION FOR WITH LATCH TYPE

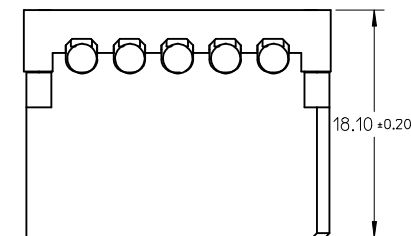

APPLICATION FOR WITHOUT LATCH TYPE

NOTE

- 1 MATERIAL: THERMAL PLASTIC, COLOR : BLACK UL94V-0.
- 2 THIS COVER IS FEED THROUGH TYPE, IT IS AVAILABLE FOR 67926-000*/002*(WITH LATCH), 67926-001*(WITHOUT LATCH).
- 3 PACKAGE SPEC:
 - 3.1 1000 PCS IN ONE BAG.
 - 3.2 3000 PCS(3 PAGS) IN ONE INNER CARTON.
 - 3.3 12,000 PCS(4 INNER CARTONS) IN ONE OUTER CARTON.

P/N	REMARK
67926-0041	NON HALOGEN-FREE
67926-0841	HALOGEN-FREE

ADD PART NUMBER EC NO: SH2009-0536 TDRWN:XJONG 2009/05/05 CHKD:XJONG 2009/06/19 APPR:HWANG 2009/06/23	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
REV	DESCRIPTION	REV			DRAWN BY DATE		COVER FOR SATA POWER CONNECTOR IDT TYPE					
			4 PLACES ± --- ± ---		GRATE MA 2004/04/25							
			3 PLACES ± --- ± ---		CHECKED BY DATE							
			2 PLACES ± 0.15 ± ---		YA JUN 2004/04/25							
			1 PLACE ± 0.25 ± ---		APPROVED BY DATE		MOLEX INCORPORATED					
			ANGULAR ± 1 °		SAM 2004/04/25							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.					DOCUMENT NO.		SHEET NO.
					SEE TABLE					SD-67926-004		1 OF 1
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2 1