


MATERIALS AND FINISHES

MMCX PLUG: SEE SD-73415-387

BNC JACK: SEE SD-73171-165

CABLE: BELDEN 1671A

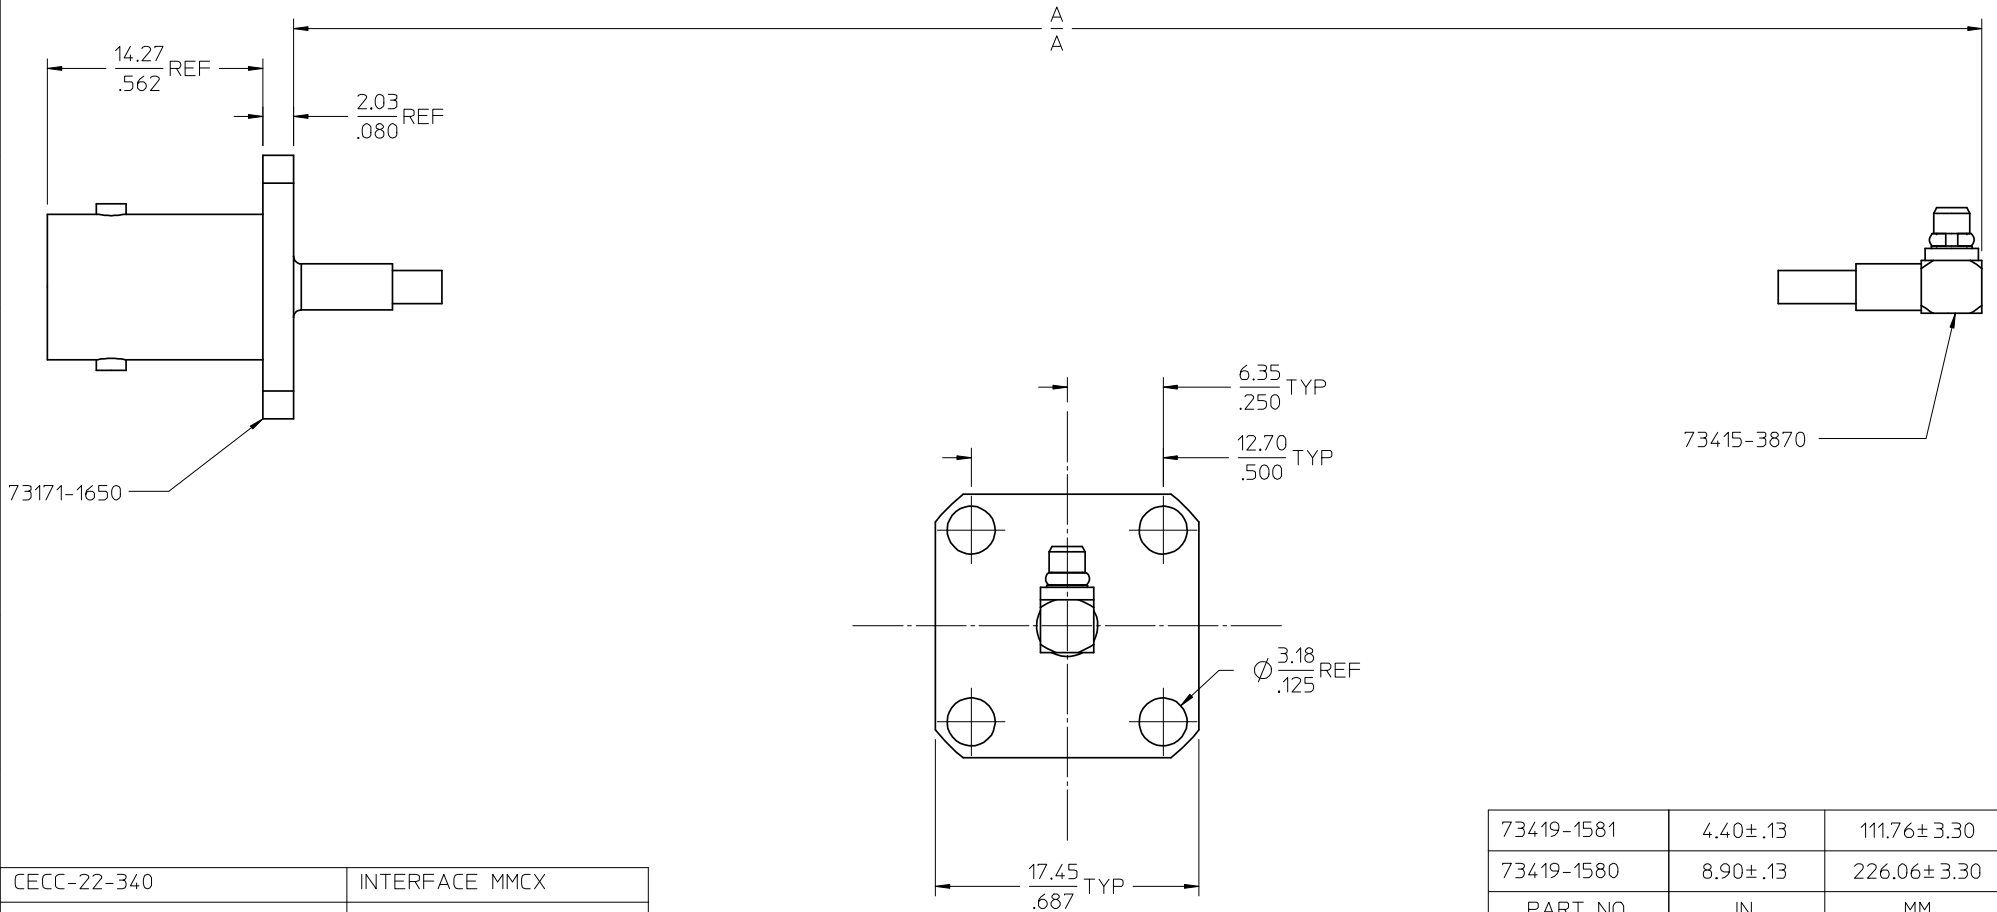

CECC-22-340	INTERFACE MMCX
MIL-STD-348A, FIG. 301.2	INTERFACE BNC JACK
SPECIFICATION	DESCRIPTION

CHG: REDREW IN SD AND LOADED INTO WM.	EC NO: URF2008-0640	2008/06/20
	DRWN:ROBERTSON	2008/06/20
A1	CHKD:SSS	2008/06/20
	APPR:JWIENER	2008/06/20

QUALITY SYMBOLS	▽=0
	▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± .005	± .0002
3 PLACES	± .005	± .0002
2 PLACES	± .005	± .0002
1 PLACE	± .005	± .0002
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE		SCALE
MM/IN		DESIGN UNITS
DRAWN BY	DATE	METRIC
TEF	2001/10/22	THIRD ANGLE PROJECTION
CHECKED BY	DATE	
SSS	2001/10/22	
APPROVED BY	DATE	
GMH	2001/10/22	
MATERIAL NO.	SEE TABLE	
SIZE	C	

TITLE		
BNC J 4H FLANGE MOUNT TO MMCX P RA BELDEN 1671A CA-BNC/MMCX		
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-73419-158	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		