


MATERIALS AND FINISHES

MMCX PLUG: SEE SD-73415-387

BNC JACK: SEE SD-73171-165

CABLE: BELDEN 1671A

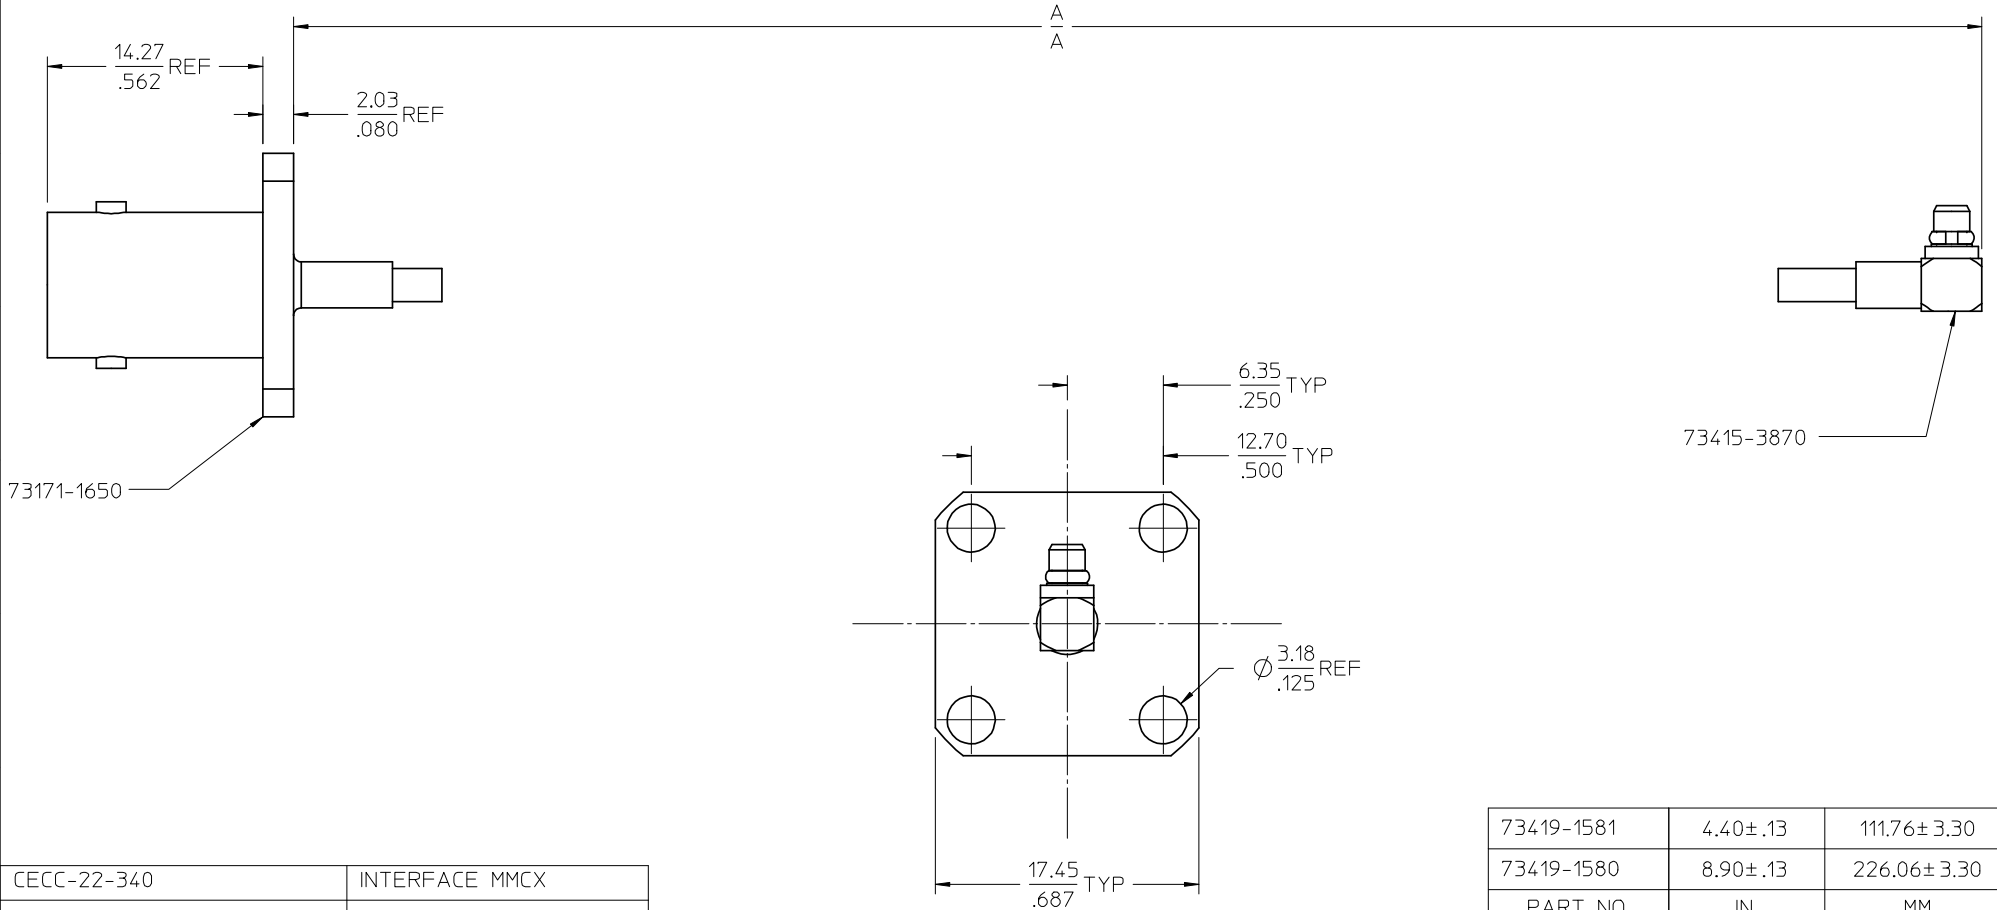

CECC-22-340	INTERFACE MMCX
MIL-STD-348A, FIG. 301.2	INTERFACE BNC JACK
SPECIFICATION	DESCRIPTION

73419-1581	4.40 ± .13	111.76 ± 3.30
73419-1580	8.90 ± .13	226.06 ± 3.30
PART NO.	IN	MM
A		

CHG: REDREW IN SD AND LOADED INTO WM. EC NO: URF2008-0640 DRWN: ROBERTSON 2008/06/20 CHKD: SSS 2008/06/20 APPR: JWIENER 2008/06/20 REV: A1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY DATE TEF 2001/10/22 CHECKED BY DATE SSS 2001/10/22 APPROVED BY DATE GMH 2001/10/22	SCALE DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE BNC J 4H FLANGE MOUNT TO MMCX P RA BELDEN 1671A CA-BNC/MMCX MOLEX INCORPORATED SD-73419-158 SHEET NO. 1 OF 1	
						SEE TABLE
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION