

date 02/07/2012

page 1 of 3

SERIES: SD-XXLP | DESCRIPTION: STANDARD DIN CONNECTOR


FEATURES

- locking
- metal bushing
- strain relief





PART NUMBER KEY



SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
rated input voltage			100		Vac
rated input current				2	А
contact resistance				20	mΩ
insulation resistance	at 500 Vdc	100			ΜΩ
voltage withstand	at 50/60Hz for 1 minute			1000	Vac
operating temperature		-40		85	°C


MECHANICAL DRAWINGS

units: mm[inches]

TOLERANCE: ±0.2mm


	MATERIAL	PLATING
contact terminals	brass	silver
clip plate	cold rolled steel	nickel
body/nut	aluminum alloy	nickel
screw	steel	nickel
body	aluminum alloy	nickel
strain relief	PVC	
plastic core	nylon	

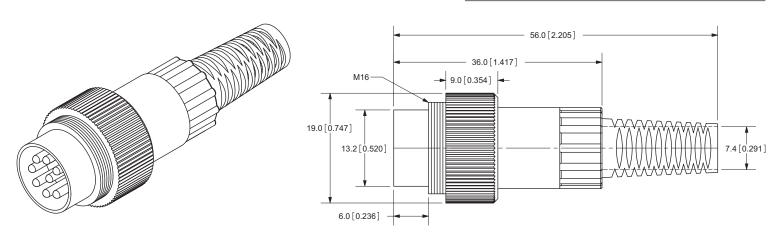






Ø7.0 [0.276]

SD-30LP










SD-70LP



CUI Inc | SERIES: SD-XXLP | DESCRIPTION: LED DRIVER date 02/07/2012 | page 3 of 3

REVISION HISTORY

rev.	description	date
1.0	initial release	02/23/2006
1.01	new template applied	02/07/2012

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 **800.275.4899**

Fax 503.612.2383 **cui**.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.