

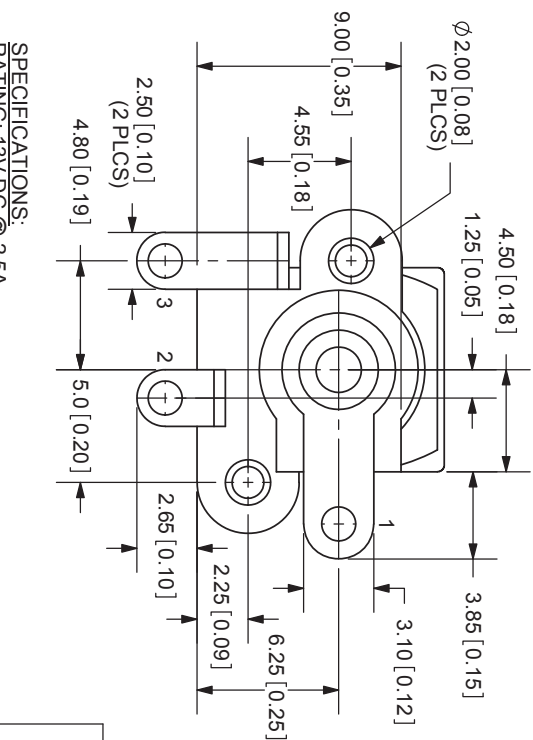
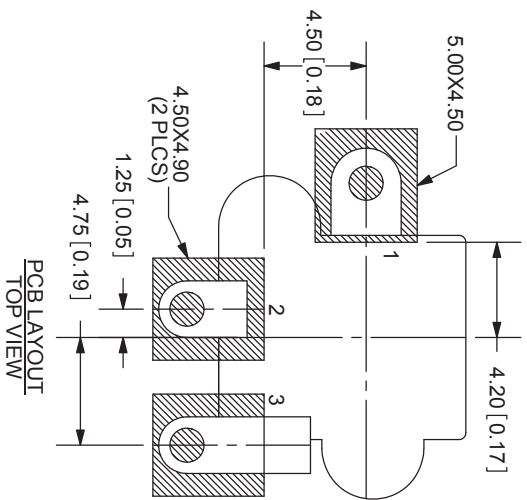
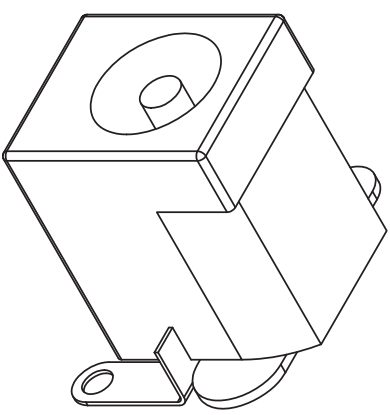


REV.	DESCRIPTION	DATE
A	NEW DRAWING	12/12/2005
B	added missing dimensions	10/18/2007
C	housing material change	2/9/2011
D	added TFR package option	11/7/2012

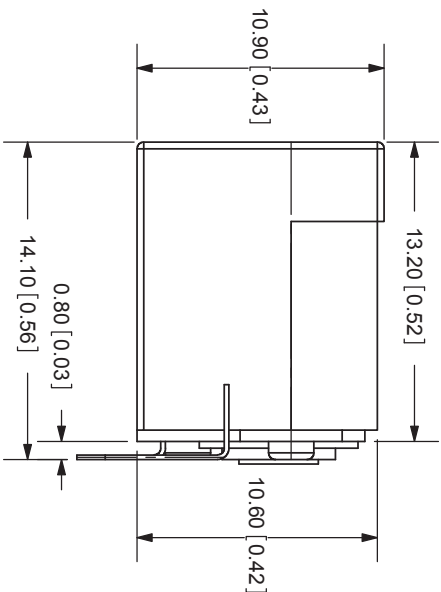

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

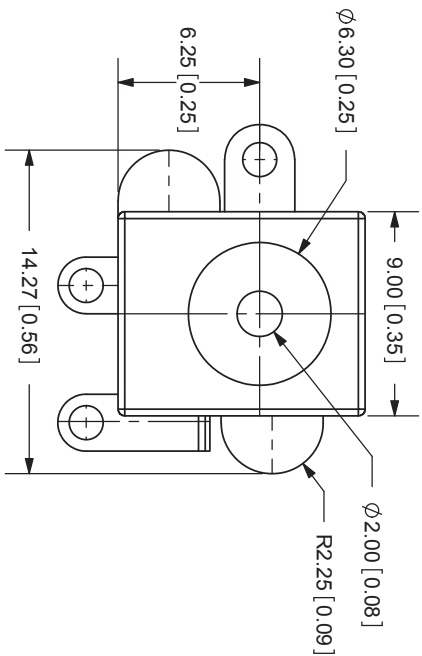


Note:
Add suffix "-TR" to the model number for
tape & reel packaging



CUI INC

SPECIFICATIONS:
RATING: 13V DC @ 2.5A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

MODEL NO.	PJ-006A-SMT
SCHEMATIC	

CENTER PIN DIAMETER 2.0mm Dia.

PC FILE NAME:
PJ-006A-SMT

COPYRIGHT 2012 BY CUI INC.

	MATERIAL	PLATING
CENTER PIN	Copper	Nickel
TERMINAL 1	Brass	Silver
TERMINAL 2	Phosphor Bronze	Silver
TERMINAL 3	Brass	Silver
HOUSING	LCP + PA10T HIF	

TITLE	DC POWER JACK	REV.	D
PART NO.	PJ-006A-SMT	UNITS	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
SCALE:	3:1		