

XBee-PRO[®] XSC

900 MHz Long-Range RF Module

High-performance, long-range RF module is ideal for applications with low power requirements.



Overview

Digi's latest XBee-PRO XSC module features two times the throughput and 20 times less current draw than the previous XSC module, making it ideal for long-range sensor applications. The module features an ADF7023 transceiver from Analog Devices, delivering best-in-class distances up to 28 miles Line-of-Sight (LOS), along with low power consumption, drawing less than 2.5 uA in power down.

The latest XBee-PRO XSC (S3B hardware) allows for several firmware options which are firmware compatible with the legacy 9XStream[®] and the legacy XBee-PRO XSC modules. In addition, future firmware versions will support DigiMesh[®] along with Digi's proprietary point-to-multipoint protocols.

Digi's free X-CTU configuration utility simplifies the configuration of the XSC module, which requires no programming. In addition, it can be easily configured via a simplified AT command set. The modules are pre-certified for North America and Australia, further reducing development costs and time to market.

Related Products



Gateways




Development Kits



ZigBee Modules

Application Highlight

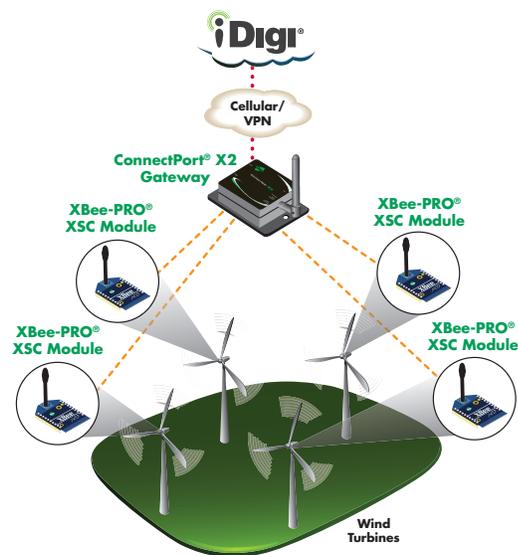

Features/Benefits

- Simplified AT command set accelerates time to market
- Modules are over-the-air compatible with legacy 9XStream and XSC products
- 20 times less current draw than previous XSC module
- Superior outdoor LOS range of up to 28 miles
- Pin-compatible with existing through-hole XBee RF modules
- RF data throughput up to 20 Kbps
- 900 MHz license-free ISM band operation




Specifications

XBee-PRO® XSC (S3)

XBee-PRO® XSC (S3B)

Hardware		
Processor	ADF7025 transceiver, Atmel AT91SAM7S	ADF7023 transceiver, Cortex-M3 EFM32G230 @ 28 MHz
Frequency Band	902 MHz to 928 MHz	
Antenna Options	Wire, U.FL, RPSMA	
Performance		
RF Data Rate	10 Kbps	10 Kbps or 20 Kbps
Indoor/Urban Range	Up to 1200 ft (370 m)	Up to 2000 ft (610 m)
Outdoor/Line-Of-Sight Range	Up to 6 mi (9.6 km)	Up to 9 mi (14 km) w/ dipole antenna Up to 28 mi (45 km) w/ high-gain antenna
Transmit Power	Up to 20 dBm (100 mW)	Up to 24 dBm (250 mW) software selectable
Receiver Sensitivity	-106 dBm	-109 dBm at 9600 baud -107 dBm at 19200 baud
Features		
Spread Spectrum	FHSS	
Operating Temperature	-40° C to +85° C	
Power		
Supply Voltage	3.0 - 3.6 VDC	2.4 to 3.6 VDC
Transmit Current	265 mA	215 mA
Receive Current	65 mA	26 mA
Sleep Current	45 uA	2.5 uA
Regulatory Approvals		
FCC	MCQ-XBEEEXSC	MCQ-XBPS3B
IC	1846A-XBEEEXSC	1846A-XBPS3B
C-Tick	No	Australia
Pricing		
Development Kit (includes 2 modules)	\$149	

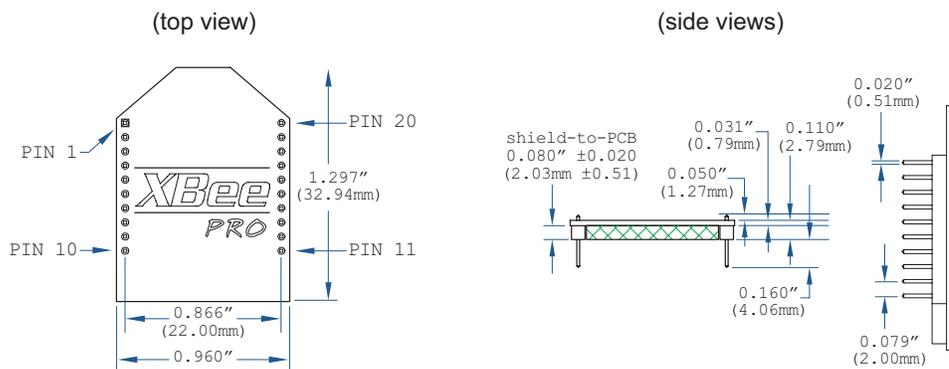

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong one-year warranty. www.digi.com/support



91001899
A1/512

**Digi International
Worldwide HQ**

877-912-3444
952-912-3444

**Digi International
France**

+33-1-55-61-98-98
www.digi.fr

**Digi International
Japan**

+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
India**

+91-80-4287-9887

**Digi International
Singapore**

+65-6423-0015

**Digi International
China**

+86-21-5150-6898
www.digi.cn

BUY ONLINE • www.digi.com

© 2012 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the Making Wireless M2M Easy logo, DigiMesh, XBee, XBee-PRO and XStream are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

info@digi.com

