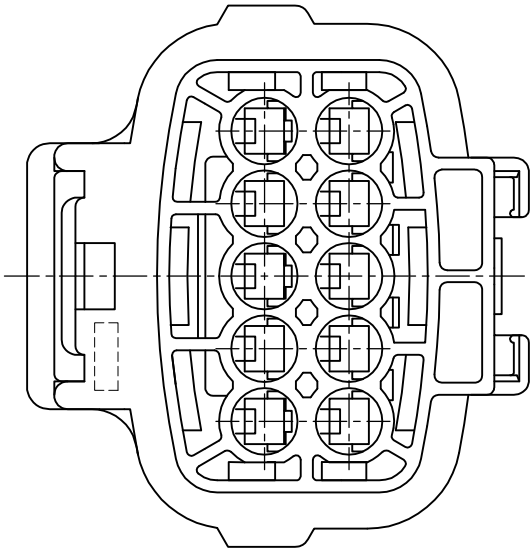
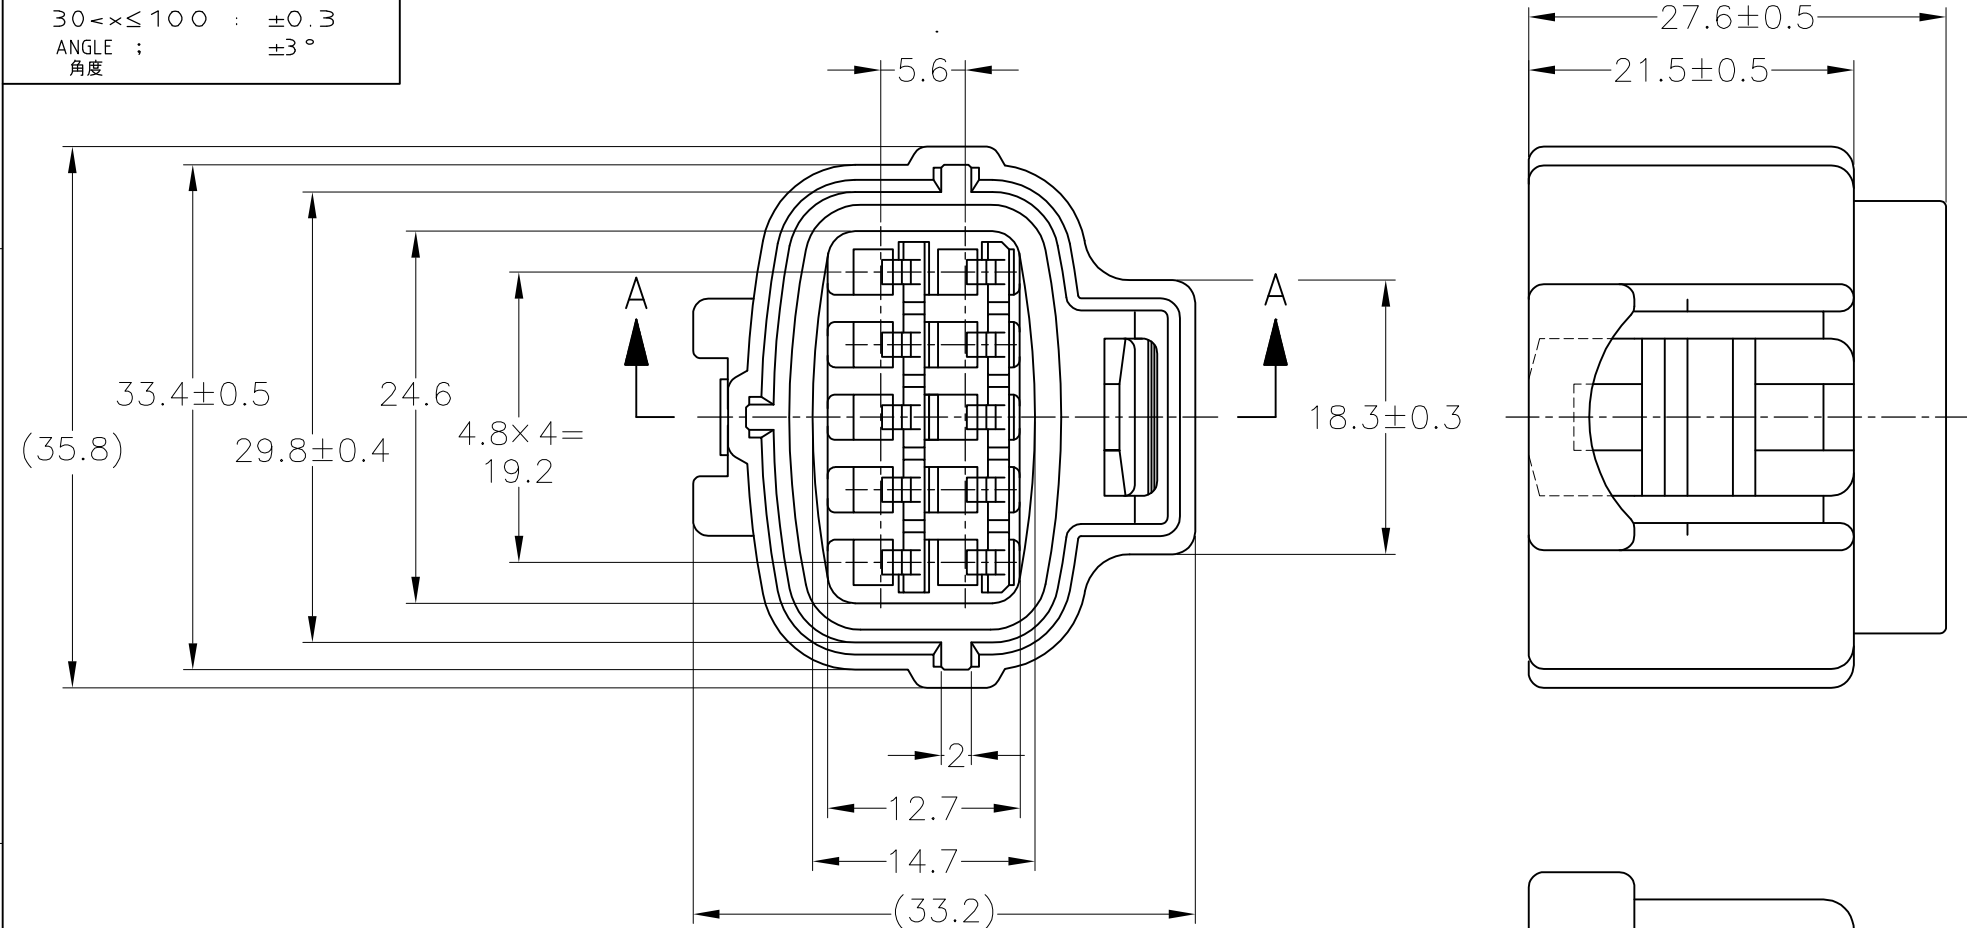


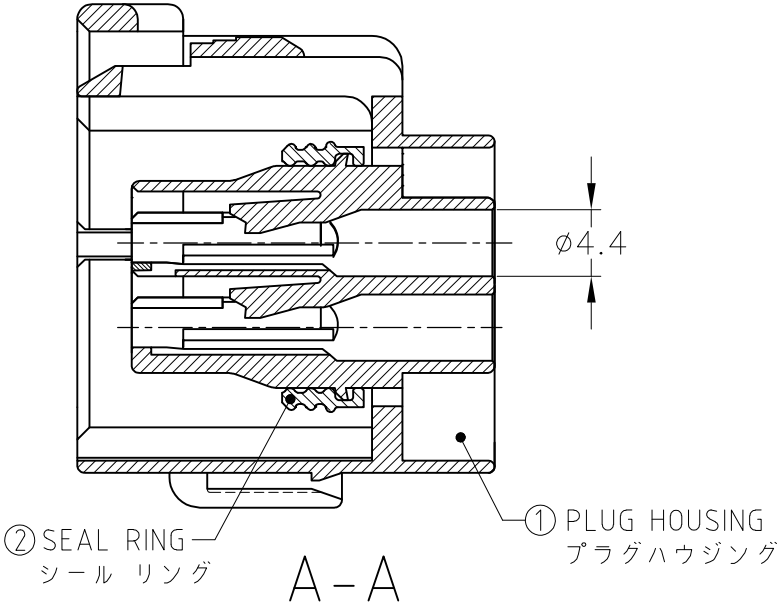
LOC J	DIST —	REVISIONS 變更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED	06AUG14	DM	TK

TOLERANCE UNLESS OTHERWISE SPECIFIED:
一般公差
0<×≤ 10 : ±0.2
10<×≤ 30 : ±0.25
30<×≤ 100 : ±0.3
ANGLE : ±3°
角度




- 1. 嵌合相手型番：174657
- 2. 本品はプラグハウジング単体にシールリングがアッセンブリされたものである。
- 3. 本品はダブルロックプレート型番 174656を装着して使用する。
- ④ シールリングはフタル酸フリー品である。

- 1. FOR CAP HOUSING PN 174657
- 2. THIS PART IS COMPOSED OF PLUG HOUSING AND SEAL RING
- 3. THIS PART MUST BE USED WITH DOUBLE LOCK PLATE PN 174656
- ④ SEAL RING IS NON-BIS TYPE



NBR④/BLACK	PBT/BLACK	2822395-1
② SEAL RING	① PLUG HOUSING	PART NUMBER
MATERIAL / COLOR		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.MATSUURA 06AUG2014		TE Connectivity			
		CHK S.IWATANI 06AUG2014					
DIMENSIONS: 単位： 耗 mm				APVD T.KOHNO 06AUG2014		NAME 名称 10Pos. ECONOSEAL J-MARKII+ CONNECTOR PLUG HOUSING	
				PRODUCT SPEC 製品規格 108-5262			
				APPLICATION SPEC 取付適用規格 114-5082			
				WEIGHT 12.2g			
MATERIAL 材料 SEE TABLE		FINISH 仕上		SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-2822395	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 尺度 2:1	SHEET 1 OF 2	REV A	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

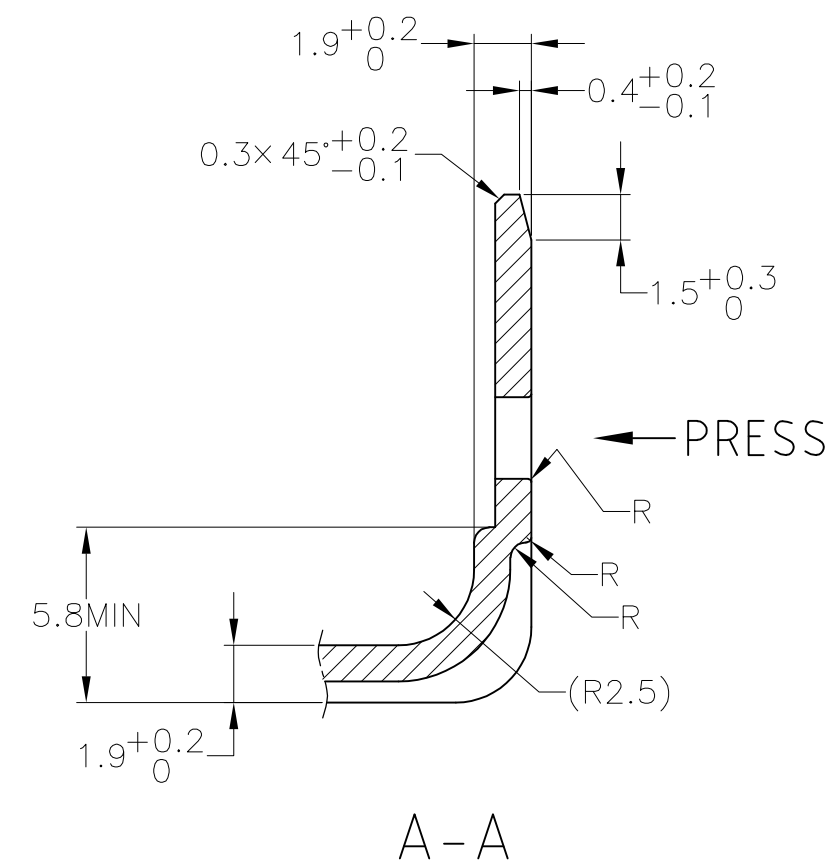
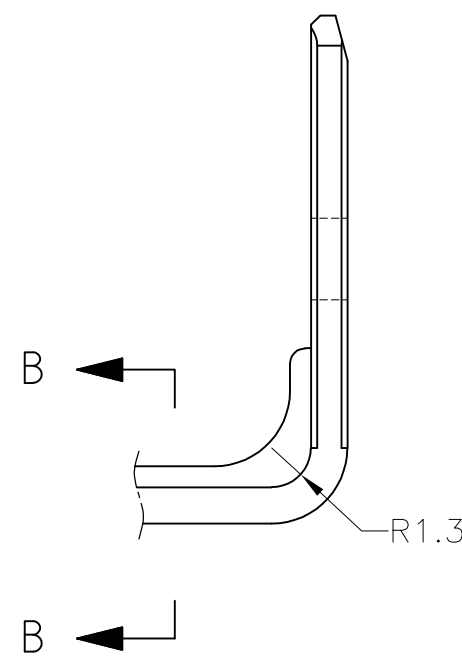
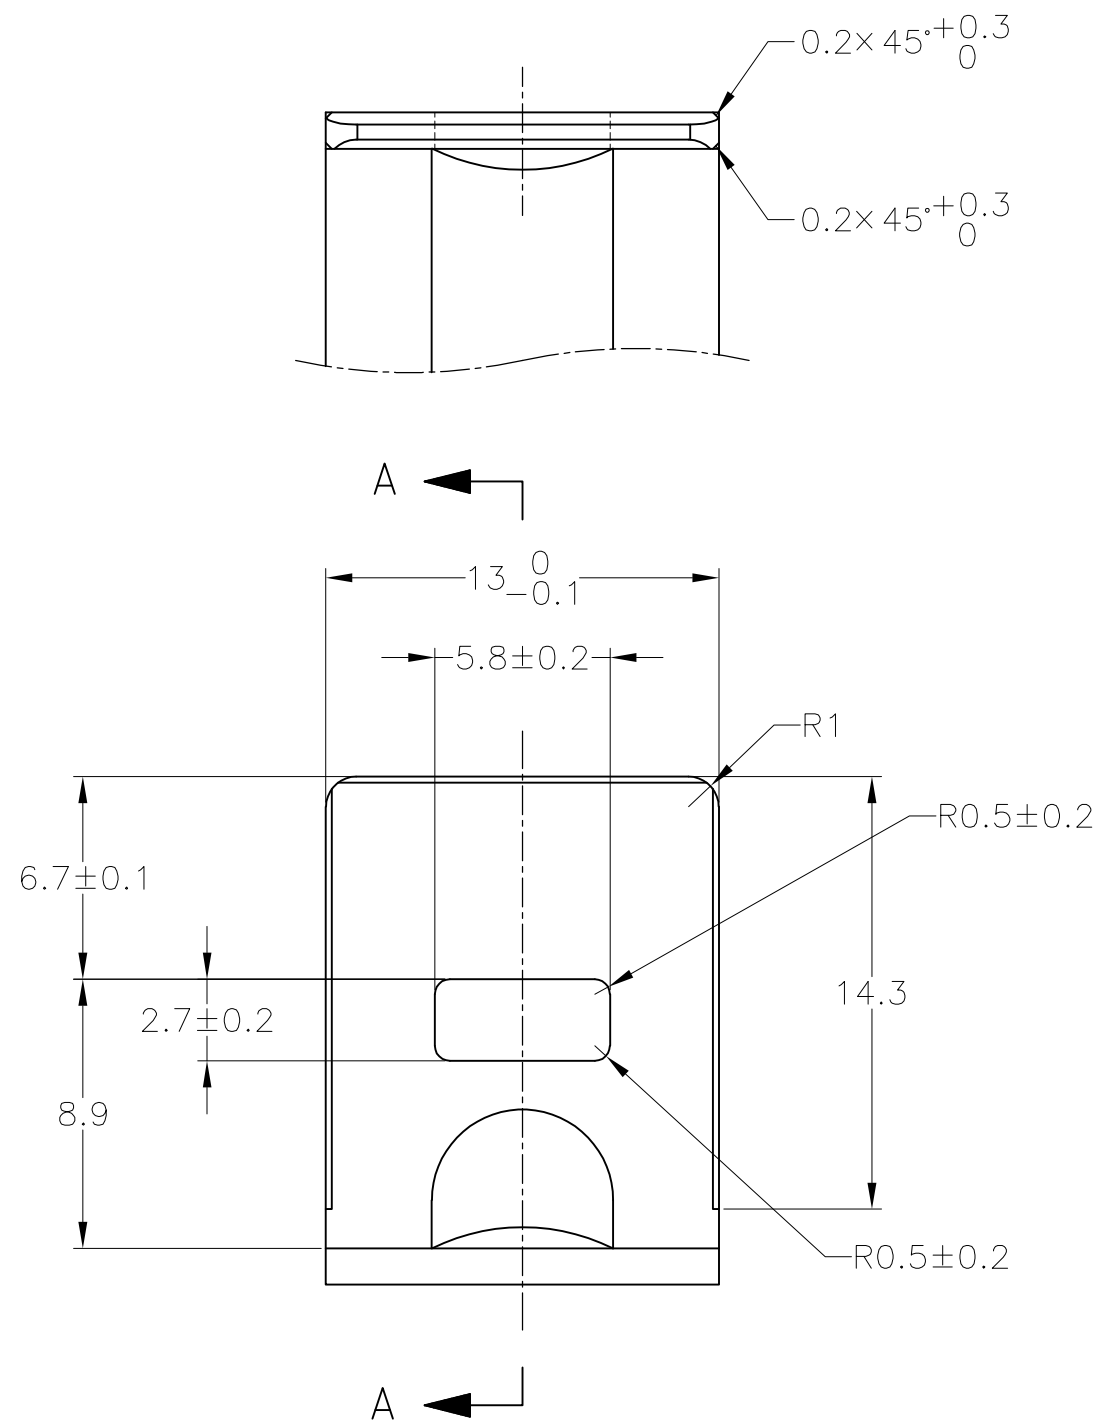
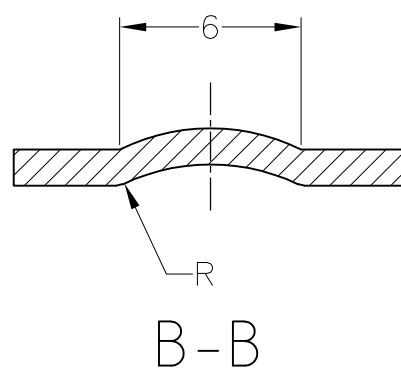
APVD

- SEE SHEET 1


-

-

-

ブラケット推奨寸法図
RECOMMENDED DIMENSION OF BRACKET $t = 1.2 \pm 0.08$ 

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
仕上MATERIAL
材料

DWN 06AUG2014

D.MATSUURA

CHK 06AUG2014

S.IWATANI

APVD 06AUG2014

T.KOHNO

PRODUCT SPEC

製品規格

APPLICATION SPEC

取付適用規格

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME
名称10Pos. ECONOSEAL J-MARKII+ CONNECTOR
PLUG HOUSING

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

A3 00779

C-2822395

SCALE
尺度 4:1SHEET
2 OF 2REV
A