

SPECIFICATION CONTROL DRAWING

SCD **SHF260-0113**


Title **WIRE, MODIFIED PERFLUOROALKOXY COPOLYMER RESIN-INSULATED, 1000 VOLT**

Date **5-22-15**

Revision **F**

This specification sheet forms a part of the latest issue of Raychem Specification WCD 3111.

CONDUCTOR - NICKEL-COATED COPPER

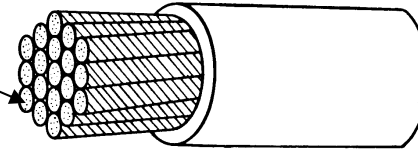

INSULATION - MODIFIED PFA

TABLE I. CONSTRUCTION DETAILS

PART NUMBER 1/	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	DIAMETER OF STRANDED CONDUCTOR (inch) (mm)		MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.) (ohms/km)	FINISHED WIRE			NOMINAL WEIGHT (lbs/1000 ft.) (kg/km)
			MINIMUM	MAXIMUM		DIAMETER (inch) (mm)			
						MINIMUM	NOMINAL	MAXIMUM	
SHF260-0113-24-*	24	105 x 44	.023 (.584)	.027 (.686)	30.6 (100.)	.050 (1.27)	.053 (1.35)	.056 (1.42)	3.10 (4.61)
SHF260-0113-22-*	22	154 x 44	.029 (.737)	.033 (.838)	21.9 (71.8)	.058 (1.47)	.061 (1.55)	.064 (1.63)	4.23 (6.29)
SHF260-0113-20-*	20	154 x 42	.037 (.940)	.043 (1.09)	13.3 (43.6)	.069 (1.75)	.072 (1.83)	.075 (1.91)	5.96 (8.87)
SHF260-0113-18-*	18	259 x 42	.047 (1.19)	.053 (1.35)	8.67 (28.4)	.079 (2.01)	.082 (2.08)	.085 (2.16)	8.58 (12.8)
SHF260-0113-16-*	16	259 x 40	.061 (1.55)	.067 (1.70)	5.10 (16.7)	.093 (2.36)	.096 (2.44)	.099 (2.51)	12.2 (18.2)
SHF260-0113-14-*	14	665 x 42	.078 (1.98)	.086 (2.18)	3.32 (10.9)	.112 (2.84)	.116 (2.95)	.120 (3.05)	19.1 (28.4)
SHF260-0113-12-*	12	665 x 40	.096 (2.44)	.106 (2.69)	1.99 (6.53)	.131 (3.33)	.137 (3.48)	.143 (3.63)	27.3 (40.6)
SHF260-0113-10-*	10	665 x 38	.126 (3.20)	.140 (3.56)	1.14 (3.74)	.163 (4.14)	.171 (4.34)	.179 (4.55)	44.7 (66.5)
SHF260-0113-8-*	8	665 x 36	.157 (3.99)	.173 (4.39)	.714 (2.34)	.195 (4.95)	.205 (5.21)	.215 (5.46)	67.7 (101.)
SHF260-0113-6-*	6	1045 x 36	.192 (4.88)	.208 (5.28)	.490 (1.61)	.231 (5.87)	.242 (6.15)	.253 (6.43)	102. (152.)
SHF260-0113-4-*	4	1665 x 36	.265 (6.73)	.285 (7.24)	.326 (1.07)	.310 (7.87)	.323 (8.20)	.336 (8.53)	168. (250.)
SHF260-0113-2-*	2	1665 x 34	.325 (8.26)	.345 (8.76)	.193 (.633)	.373 (9.47)	.387 (9.83)	.401 (10.2)	250. (372.)
SHF260-0113-1-*	1	2109 x 34	.370 (9.40)	.400 (10.2)	.163 (.535)	.426 (10.8)	.441 (11.2)	.456 (11.6)	308. (458.)
SHF260-0113-0-*	0	2660 x 34	.435 (11.0)	.465 (11.8)	.133 (.436)	.494 (12.5)	.510 (13.0)	.526 (13.4)	395. (588.)
SHF260-0113-00-*	00	3325 x 34	.485 (12.3)	.515 (13.1)	.102 (.335)	.546 (13.9)	.564 (14.3)	.582 (14.8)	491. (731.)
SHF260-0113-000-*	000	4123 x 34	.540 (13.7)	.575 (14.6)	.073 (.240)	.606 (15.4)	.626 (15.9)	.646 (16.4)	604. (899.)
SHF260-0113-0000-*	0000	5320 x 34	.615 (15.6)	.655 (16.6)	.057 (.187)	.685 (17.4)	.707 (18.0)	.729 (18.5)	774. (1152.)

NOTE: Nominal values are for information only. Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Raychem, TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks.

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



TABLE II. PERFORMANCE DETAILS

PART NUMBER 1/	BEND TESTING					
	MANDREL DIAMETER (inch) (mm) (± 3%)				WEIGHT (lb) (kg) (± 3%)	
	LIFE CYCLE	MINIMUM BEND RADIUS	WRAP TEST	COLD BEND	LIFE CYCLE	COLD BEND
SHF260-0113-24-*	.500 (12.7)	.500 (12.7)	.500 (12.7)	1.00 (25.4)	1.50 (.680)	3.00 (1.36)
SHF260-0113-22-*	.500 (12.7)	.750 (19.1)	.750 (19.1)	1.00 (25.4)	2.00 (.907)	3.00 (1.36)
SHF260-0113-20-*	.500 (12.7)	.750 (19.1)	.750 (19.1)	1.00 (25.4)	3.00 (1.36)	4.00 (1.81)
SHF260-0113-18-*	.750 (19.1)	1.00 (25.4)	1.00 (25.4)	1.50 (38.1)	4.00 (1.81)	4.00 (1.81)
SHF260-0113-16-*	1.00 (25.4)	1.00 (25.4)	1.00 (25.4)	1.50 (38.1)	4.00 (1.81)	5.00 (2.27)
SHF260-0113-14-*	1.00 (25.4)	1.25 (31.8)	1.25 (31.8)	2.00 (50.8)	6.00 (2.72)	5.00 (2.27)
SHF260-0113-12-*	1.50 (38.1)	1.50 (38.1)	1.50 (38.1)	2.00 (50.8)	6.00 (2.72)	5.00 (2.27)
SHF260-0113-10-*	2.00 (50.8)	2.00 (50.8)	2.00 (50.8)	3.00 (76.2)	6.00 (2.72)	5.00 (2.27)
SHF260-0113-8-*	3.00 (76.2)	2.25 (57.2)	2.25 (57.2)	4.00 (102.)	8.00 (3.63)	6.00 (2.72)
SHF260-0113-6-*	4.00 (102.)	2.75 (69.9)	2.75 (69.9)	5.00 (127.)	8.00 (3.63)	10.0 (4.54)
SHF260-0113-4-*	5.00 (127.)	3.75 (95.3)	3.75 (95.3)	6.00 (152.)	8.00 (3.63)	10.0 (4.54)
SHF260-0113-2-*	6.00 (152.)	4.50 (114.)	4.50 (114.)	8.00 (203.)	12.0 (5.44)	15.0 (6.80)
SHF260-0113-1-*	8.00 (203.)	5.00 (127.)	5.00 (127.)	10.0 (254.)	12.0 (5.44)	15.0 (6.80)
SHF260-0113-0-*	8.00 (203.)	6.00 (152.)	6.00 (152.)	10.0 (254.)	12.0 (5.44)	15.0 (6.80)
SHF260-0113-00-*	10.0 (254.)	6.00 (152.)	6.00 (152.)	12.0 (305.)	16.0 (7.26)	20.0 (9.07)
SHF260-0113-000-*	10.0 (254.)	7.50 (191.)	7.50 (191.)	12.0 (305.)	16.0 (7.26)	20.0 (9.07)
SHF260-0113-0000-*	10.0 (254.)	8.00 (203.)	8.00 (203.)	12.0 (305.)	16.0 (7.26)	20.0 (9.07)

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 260°C for 10,000 hours
 VOLTAGE RATING: 1000 volts (rms) at sea level
 COLOR: White preferred
 CONCENTRICITY: 70% (minimum)
 INSULATION ELONGATION AND TENSILE STRENGTH:
 Elongation, 150% (minimum)
 Tensile Strength, 2000 lbf/in² (13.8 N/mm²) (minimum)
 INSULATION FLAWS:
 Spark Test, 6.0 kV (rms)
 Impulse Dielectric Test, 8.0 kV (peak)
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
 SHRINKAGE: 290 ± 2°C for 6 hours,
 AWG 24-00: 0.125 in. (3.18 mm) (maximum) in 12 inches (305 mm)
 AWG 000-0000: 0.250 in. (6.35 mm) (maximum) in 12 inches (305 mm)

SMOKE TEST (Qualification):
 Per WCD 3111, no visible smoke
 Per SAE AS4373, Method 803 (Flaming Mode only),
 0.02 Ds (nominal) after 16 minutes
 THERMAL SHOCK RESISTANCE: 260 ± 2°C,
 AWG 24-12: 0.060 in. (1.52 mm) (maximum)
 AWG 10-8: 0.100 in. (2.54 mm) (maximum)
 AWG 6-00: 0.125 in. (3.18 mm) (maximum)
 AWG 000-0000: 0.250 in. (6.35 mm) (maximum)
 UV LASER MARKING (AWG 10 and smaller only): 67% (minimum)
 VOLTAGE WITHSTAND (Post Environmental): 3000 volts (rms)
 WRAP TEST: 290 ± 2°C for 2 hours

1/ PART NUMBER:
 The "*" in the part numbers in Tables I and II shall be replaced by a color code designator.
 Example: AWG 0, white: SHF260-0113-0-9

1/ See footer section on page 1