


1. SUGGESTED MOUNTING HOLE = Ø.191[4.86]
2. PREFORM 23-0007-6900 SHOULD BE SHIPPED WITH PART

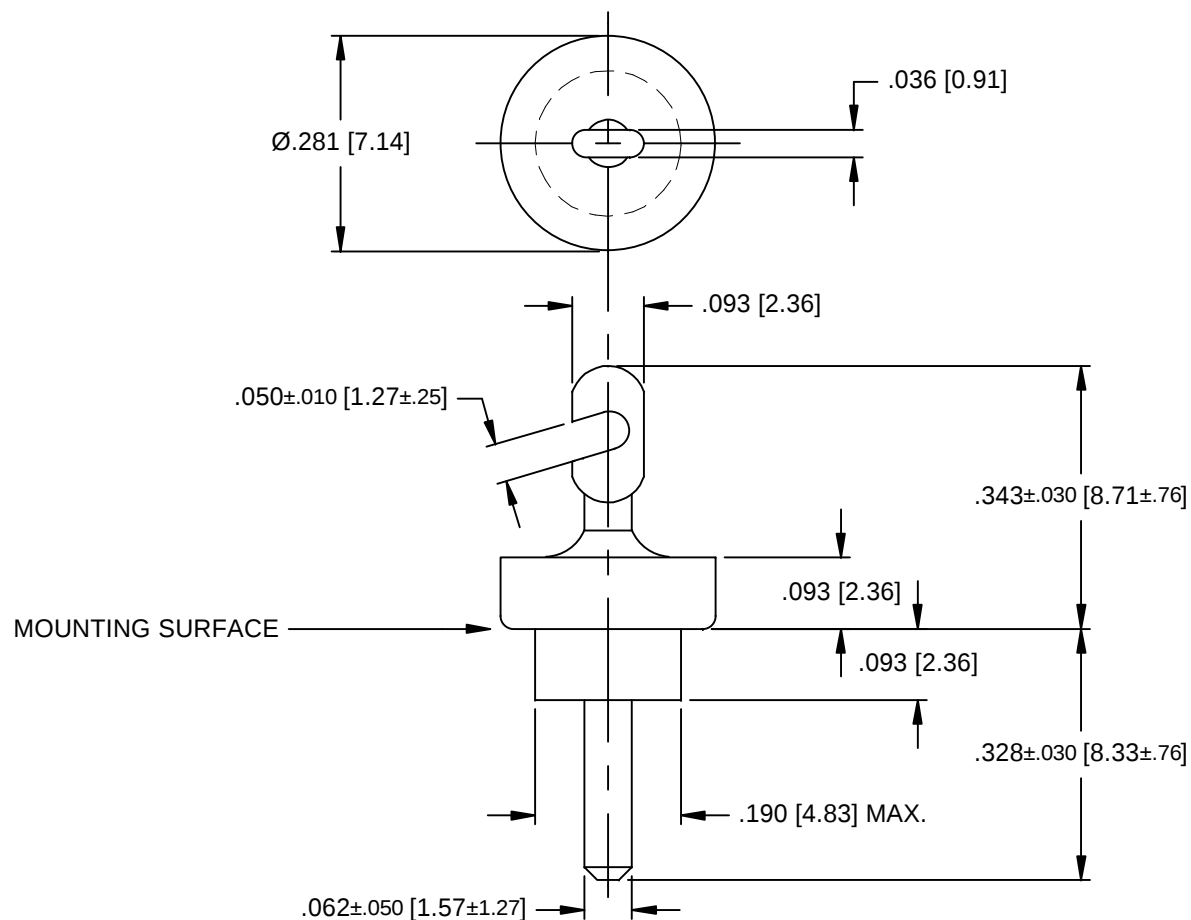

LEAD FINISH	SILVER
BUSHING FINISH	SILVER
CAPACITANCE	470pF ± 20%
TEMP. RANGE	-55°C TO +125°C
CURRENT	25 AMP MAX.
WORKING VOLTAGE	85°C VDC MAX. 125°C 500 VDC MAX.
DC RESISTANCE	.01ohms MAX.

FREQ. MHz	I.L. (db)
1	N/A
10	N/A
100	N/A
1 GHz	N/A
10 GHz	N/A

PART: NONE
BAG: 54794010X5R471M
DATE CODE
QTY./BAG (200 MAX.)
QTY./BAG (200 MAX.)

[illegible]

Quality Products From The Specialists In Electro-Magnetic Compatibility