



SAW Components

Data Sheet B3876

Data Sheet

An abstract, grayscale graphic featuring a stylized, three-dimensional representation of the EPCOS logo. The letters "EPCOS" are rendered in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a globe or a stylized wave. The background is dark and textured, with light reflecting off the surfaces of the logo.



SAW Components

B3876

Low-Loss Filter

174,20 MHz

Data Sheet


Features

- Low-loss IF filter for GSM base station
- Usable passband 200 kHz
- Ceramic SMD package

Terminals

- Gold plated


Ceramic package **QCC8C**

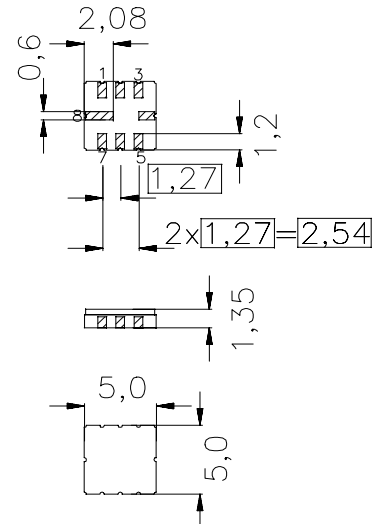

Dimensions in mm, approx. weight 0,116 g

Pin configuration

3	Input
2	Input or input ground
7	Output
6	Output ground
4, 8	Case ground
1, 5	to be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B3876	B39171-B3876-U310	C61157-A7-A56	F61074-V8169-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40/ +85	°C
Storage temperature range	T_{stg}	-40/ +85	°C
DC voltage	V_{DC}	0	V
Source power	P_s	10	dBm



SAW Components

B3876

Low-Loss Filter

174,20 MHz

Data Sheet

Characteristics

Operating temperature:

$$T = 25 \pm 2 \text{ }^{\circ}\text{C}$$

Terminating source impedance:

$Z_S = 200 \text{ } \Omega$ and matching network

Terminating load impedance:

$$Z_L = 50 \text{ } \Omega$$

			min.	typ.	max.	
Nominal frequency	f_N		—	174,2	—	MHz
Insertion attenuation	@ f_N	α_N	—	1,5	2,0	dB
Pass bandwidth		$B_{0,3\text{dB}}$				
		$\alpha_{\text{rel}} \leq 0,3 \text{ dB}$	0,2	1,9	—	MHz
Amplitude ripple (p-p)		$\Delta\alpha$				
	$f_N - 0,1 \text{ MHz} \dots f_N + 0,1 \text{ MHz}$		—	0,1	0,3	dB
Group delay	@ f_N	τ	—	220	—	ns
Group delay ripple (p-p)		$\Delta\tau$				
	$f_N - 0,1 \text{ MHz} \dots f_N + 0,1 \text{ MHz}$		—	30	100	ns
Return Loss	@ f_N		9	12	—	dB
Relative attenuation (relative to α_N)		α_{rel}				
23,00 MHz ... 149,00 MHz			60	70	—	dB
149,00 MHz ... 160,00 MHz			40	55	—	dB
160,00 MHz ... 168,00 MHz			20	40	—	dB
168,00 MHz ... 169,50 MHz			10	20	—	dB
178,50 MHz ... 184,00 MHz			10	18	—	dB
184,00 MHz ... 195,00 MHz			20	45	—	dB
195,00 MHz ... 199,00 MHz			40	55	—	dB
199,00 MHz ... 232,00 MHz			45	55	—	dB
232,00 MHz ... 252,00 MHz			35	40	—	dB
252,00 MHz ... 326,00 MHz			45	60	—	dB
326,00 MHz ... 500,00 MHz			40	65	—	dB
Temperature coefficient of frequency	TC_f		—	– 27	—	ppm/K



SAW Components

B3876

Low-Loss Filter

174,20 MHz

Data Sheet

Characteristics

Operating temperature:

$T = -10 \dots +85 \text{ }^{\circ}\text{C}$

Terminating source impedance:

$Z_S = 200 \text{ } \Omega$ and matching network

Terminating load impedance:

$Z_L = 50 \text{ } \Omega$

			min.	typ.	max.	
Nominal frequency	f_N		—	174,2	—	MHz
Insertion attenuation	@ f_N	α_N	—	1,5	2,5	dB
Pass bandwidth		$B_{0,3\text{dB}}$				
		$\alpha_{\text{rel}} \leq 0,3 \text{ dB}$	0,2	1,9	—	MHz
Relative attenuation (relative to α_N)		α_{rel}				
23,00 MHz ... 149,00 MHz			60	70	—	dB
149,00 MHz ... 160,00 MHz			40	55	—	dB
160,00 MHz ... 168,00 MHz			20	40	—	dB
168,00 MHz ... 169,50 MHz			10	20	—	dB
178,50 MHz ... 184,00 MHz			10	18	—	dB
184,00 MHz ... 195,00 MHz			20	45	—	dB
195,00 MHz ... 199,00 MHz			40	55	—	dB
199,00 MHz ... 232,00 MHz			45	55	—	dB
232,00 MHz ... 252,00 MHz			35	40	—	dB
252,00 MHz ... 326,00 MHz			45	60	—	dB
326,00 MHz ... 500,00 MHz			40	65	—	dB
Temperature coefficient of frequency	TC_f		—	- 27	—	ppm/K



SAW Components


B3876

Low-Loss Filter


174,20 MHz

Data Sheet

Normalized frequency response

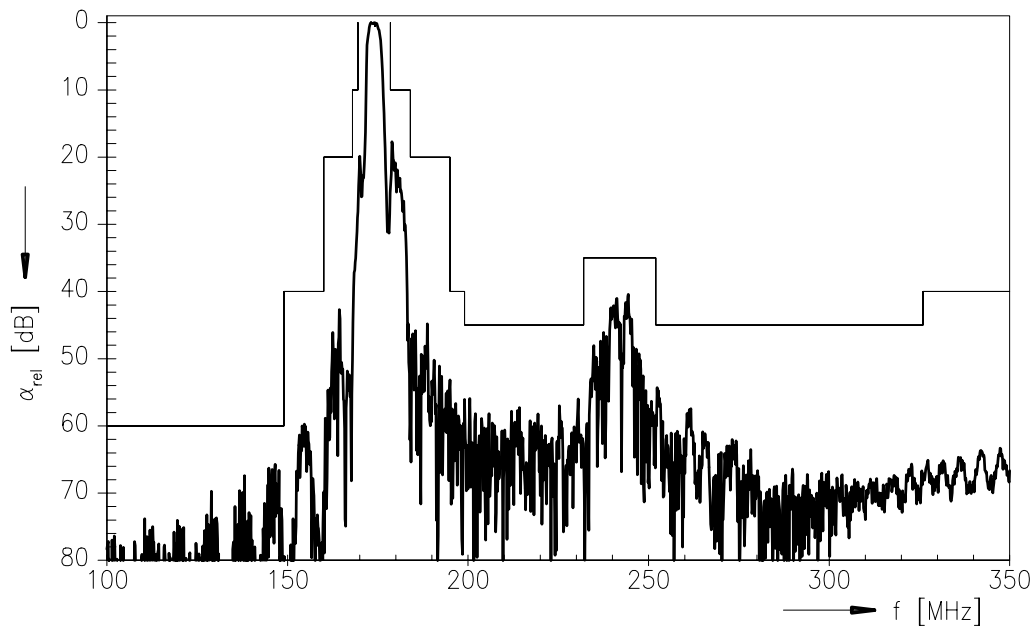


Normalized frequency response (pass band; $+25 \pm 2$ °C)

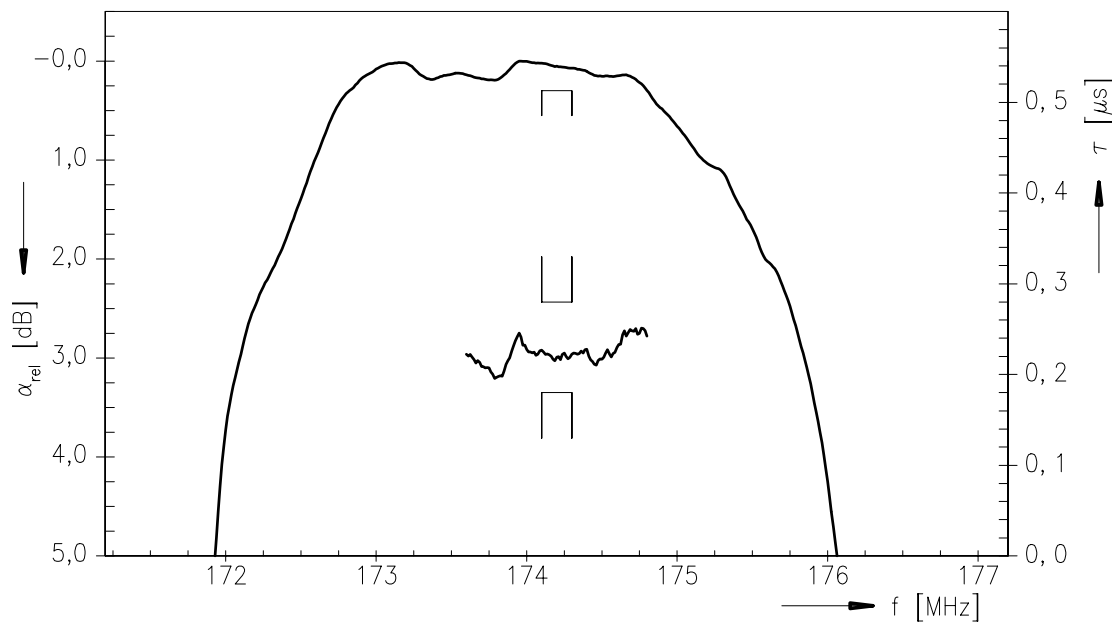

**SAW Components****B3876****Low-Loss Filter****174,20 MHz****Data Sheet****Matching network (200 Ω balanced input, 50 Ω single ended output)**

(Element values depend upon PCB layout)

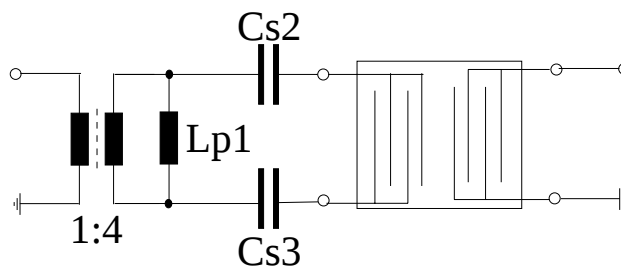

$$L_{p1} = 390 \text{ nH}$$

$$C_{s2} = 15 \text{ pF}$$

$$C_{s3} = 15 \text{ pF}$$



SAW Components

B3876

Low-Loss Filter

174,20 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.