



USB Connector A Type PCB R/A (Triple)


SPECIFICATIONS

Materials

Housing: PBT (UL 94V-0) black
 Contacts: Phosphor bronze, gold flash on mating end, tin on termination end
 with entire contact nickel underplated
 Shell: Brass, tin plated
 Back Shell: Brass, nickel plated
 Bottom Cover: Nylon, black

Electrical

Insulation Resistance: 100 M Ω minimum at 500V DC
 Contact Resistance Before Lift Test: 30 m Ω Max.
 Contact Resistance After Lift Test: 50 m Ω Max.
 Dielectric Withstanding Voltage: 750V Max
 Rated Voltage and Current: 1Amp.
 Temperature: -40°C ~85°C

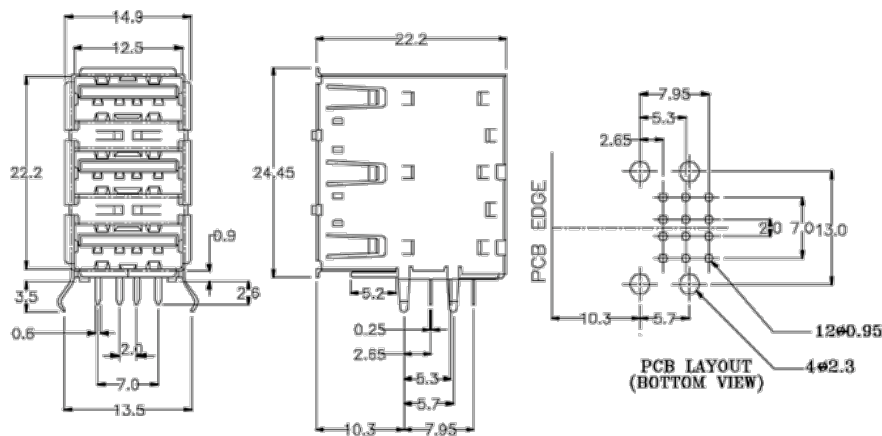

Order Information

33UBA R - T S N 1
 1 2 3 4 5 6

1. Series No.
33UBA

2. Terminal Version
R: Right angle

3. No. Of Contacts
T: Triple USB

4. Connector Type
S: Female

5. Insulator Color
N: Black

6. Packaging
1: Packed in tray



File #: 127344



File #: LR97981