

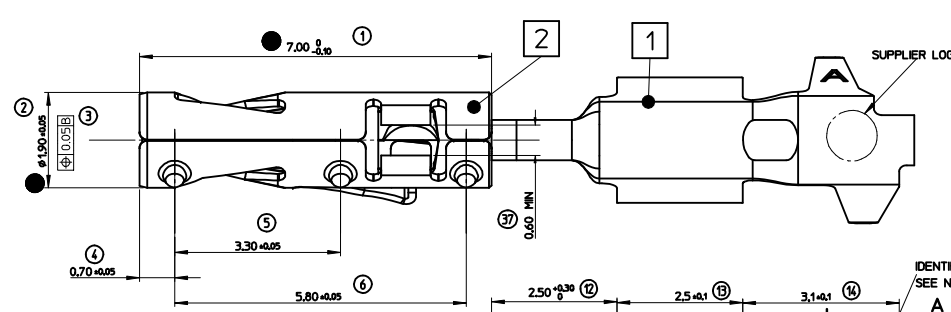

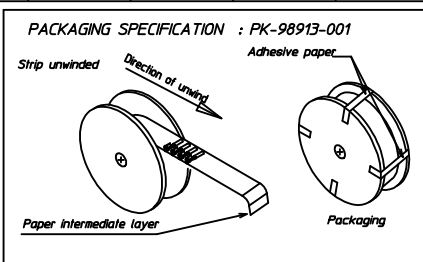


NOTE :

- MARKING 'A' is used to identify 'STANDARD' terminal
- CRIMPING SPECIFICATION ACCORDING TO AS-64322-001

2	BOX TERMINAL	STAINLESS STEEL thickness=0.15 mm
1	BODY TERMINAL	high conductivity copper alloy thickness=0.2 mm
MARK	DESIGNATION	MATERIAL

0643221029	Sn	Sn	Ni	0.75	2.5	2.4	0.6	3.3	2.8	0.75	0.119
0643221219	Au 1.27μ MINI	Sn	Ni	0.50	2.3	2.2	0.6	3.1	2.6	0.75	0.117
0643221039	Sn	Sn	Ni	0.22 TO 0.44	2.0	1.7	0.6	3.1	2.6	0.75	0.112
0643221239	Au 1.27μ MINI	Sn	Ni								
0643221019	Sn	Sn	Ni								
0643221229	Au 1.27μ MINI	Sn	Ni								
PART NUMBER	CONTACT AREA	CRIMPING AREA	UNDERLAYER	CRIMPING RANGE (mm2)	A±0.2	B±0.2	rC +0.15 -0.1	D±0.2	E±0.2	rF±0.1	WEIGHT (g)

UPDATED VIEWS

EC NO: DAU2014-0160

MDR/MT/SMITH 2013/07/15

CHK/DA/HERBELIN 2013/07/31

APPR/BWOSER 2013/08/20

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES ±	---	---
3 PLACES ±	---	---
2 PLACES ±	0.10	---
1 PLACE ±	0.1	---
0 PLACE ±	0.1	---

ANGULAR ± 2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM ONLY

DRAWN BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

MATERIAL NO.

SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

20:1

DESIGN UNITS

METRIC

FIRST ANGLE PROJECTION

TITLE

CP RCPT TRM 0.6

DOCUMENT NO.

SD-64322-001

SHEET NO.

1 OF 1

(SKC) COTES CARACTERISTIQUES SPECIALES

SPECIAL KEY CHARACTERISTICS

INDICATION DIMENSIONS S.P.C.

DENOTES S.P.C. DIMENSIONS

INDICATION DIMENSIONS CRITIQUES

DENOTES CRITICAL DIMENSIONS

INDICATION DIMENSIONS FONCTIONNELLES

DENOTES FUNCTIONAL DIMENSIONS

QUANTITE PAR FEUILLE INDIVIDUELLE

QUANTITY PER INDIVIDUAL SHEET

1 0 4 (SKC) 0