



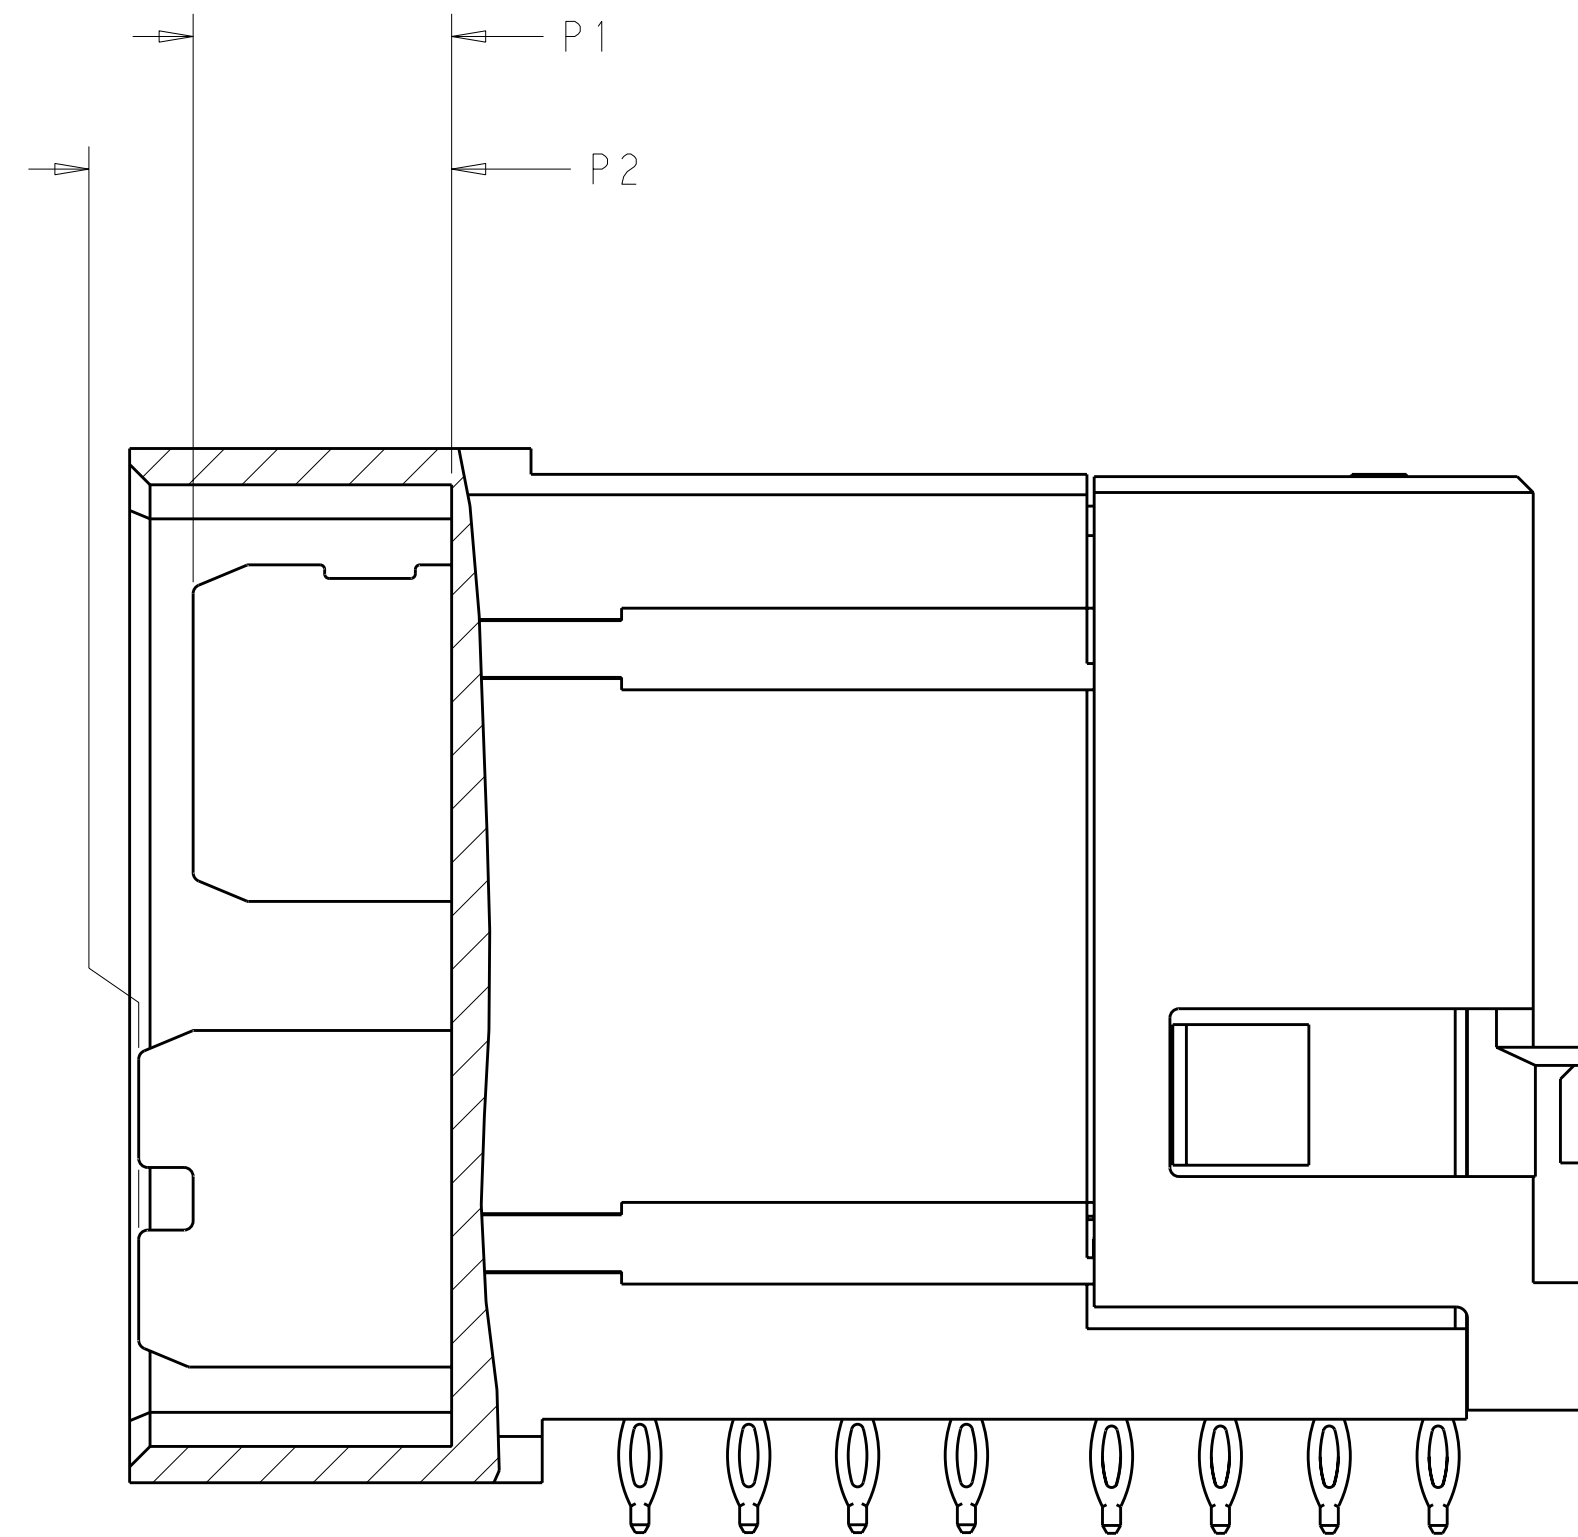

DETAIL FOR CONTACT BLADE

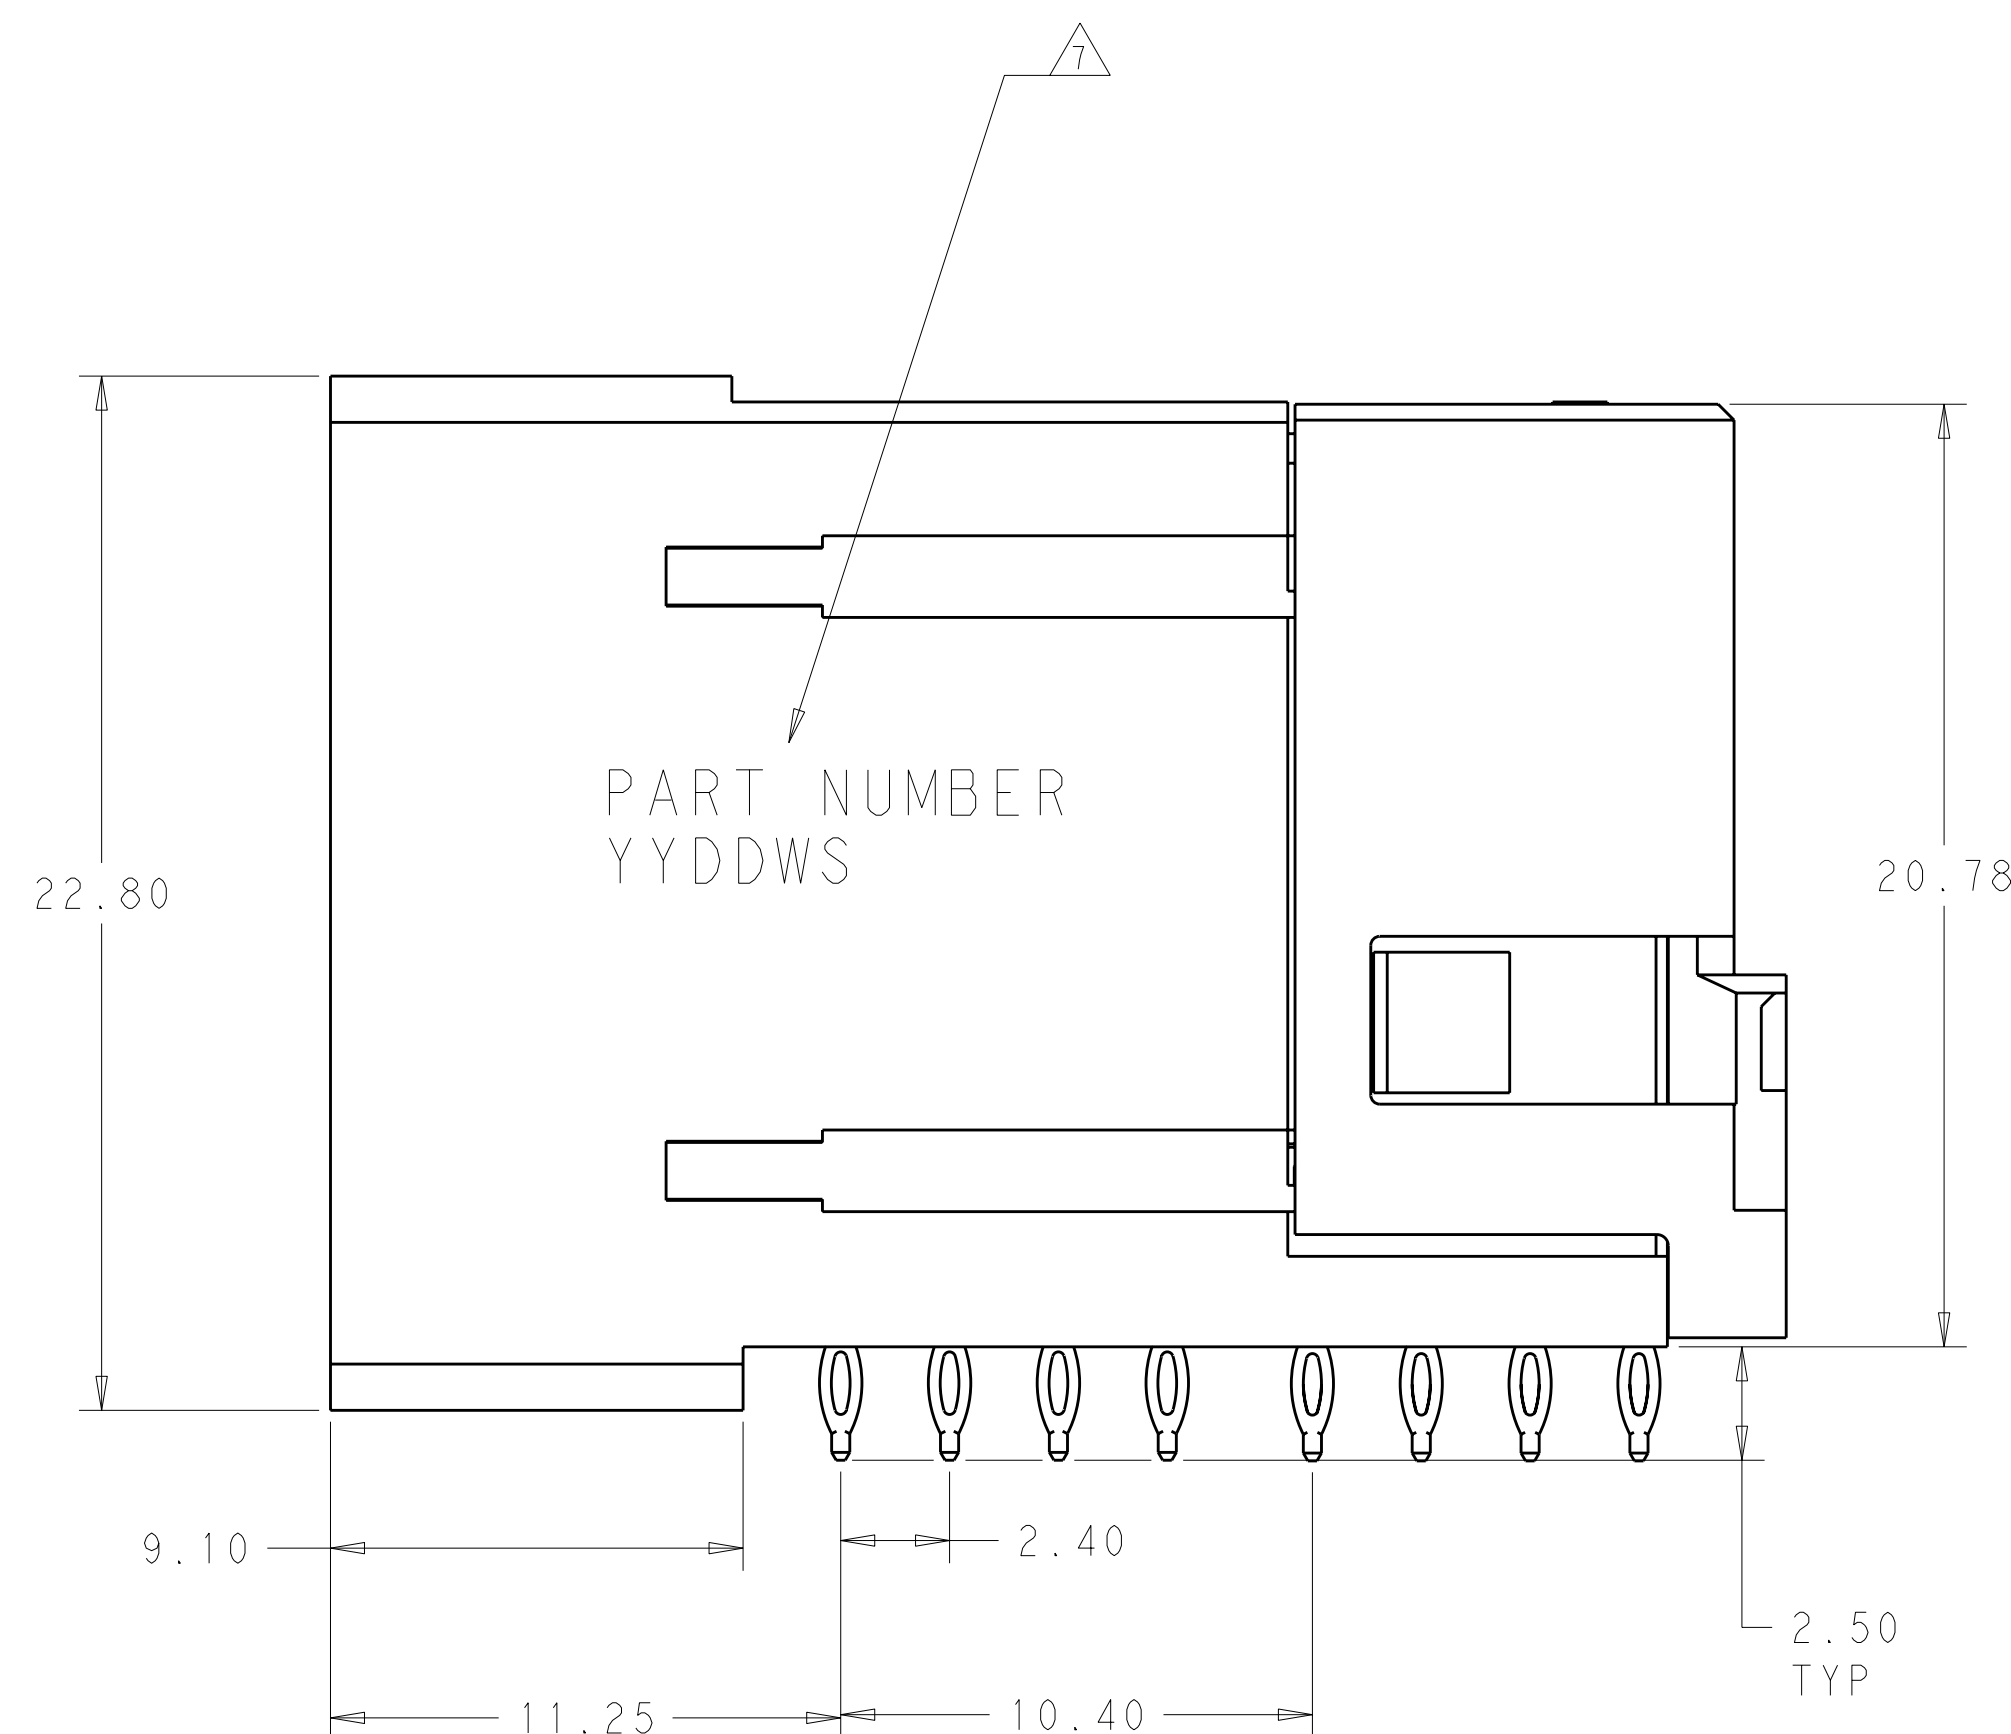

OBSOLETE	TRAY	TIN PLATING	6.90	6.90	2169869-1
			5.70	5.70	2169869-2
			6.90	5.70	2169869-3
			5.70	6.90	2169869-4
		TIN-LEAD PLATING	6.90	6.90	5-2169869-1
			5.70	5.70	5-2169869-2
			6.90	5.70	5-2169869-3
			5.70	6.90	5-2169869-4
	PACKAGING	PLATING OPTION	P1	P2	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR ENVO-ELECTRONICS CORPORATION IT IS SUBJECT TO THE PROTECTIVE POLICY OF ENVO-ELECTRONICS CORPORATION IT MAY BE RELEASED TO THE PUBLIC BUT THE INFORMATION CONTAINED HEREIN SHOULD BE CONTACTED FOR THE LATEST REVISION		DATE: 05MAY2011 DESIGNED BY: LERRY_WANG CHKD BY: SUNY_ZHAO APPROVED BY: SUNY_ZHAO 05MAY2011			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0 1 PLC ±.0 2 PLC ±0.25 3 PLC ±.0 4 PLC ±.0 ANGLES ±3°		NAME: ASSEMBLY IMPACT POWER 5PAIR R/A HEADER PRESS-FIT	
		PRODUCT SPEC: 108-2473 APPLICATION SPEC: 114-32028		SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=2169869	
MATERIAL: -		WEIGHT: -		RESTRICTED TO: -	
FINISH: 		CUSTOMER DRAWING		SCALE: 6:1 SHEET: 1 of 2 REV: A	

