


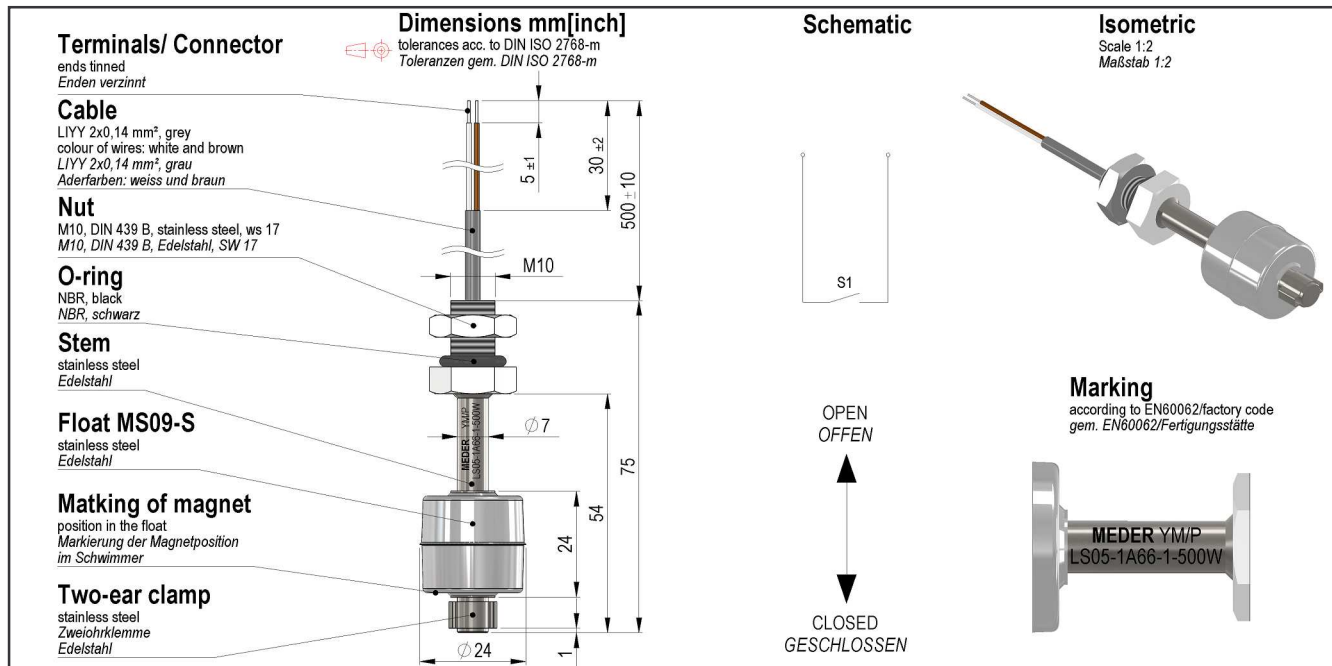

| Special Product Data | Conditions                                                        | Min | Typ | Max             | Unit |
|----------------------|-------------------------------------------------------------------|-----|-----|-----------------|------|
| Contact rating       | Any DC combination of V & A not to exceed their individual max.'s |     |     | 10              | W    |
| Switching voltage    | DC or Peak AC                                                     |     |     | 180             | V    |
| Carry current        | DC or Peak AC                                                     |     |     | 1,25            | A    |
| Switching current    | DC or Peak AC                                                     |     |     | 0,5             | A    |
| Sensor-resistance    | measured with 40% overdrive                                       |     |     | 320             | mOhm |
| Material of float    |                                                                   |     |     | stainless steel |      |
| Housing material LS  |                                                                   |     |     | stainless steel |      |
| Sealing compound     |                                                                   |     |     | Polyurethan     |      |

| Environmental data    | Conditions      | Min | Typ | Max  | Unit |
|-----------------------|-----------------|-----|-----|------|------|
| Operating temperature | cable not moved | -30 |     | 80   | °C   |
| Operating temperature | cable moved     | -5  |     | 80   | °C   |
| Storage temperature   |                 | -30 |     | 80   | °C   |
| Safety class          | DIN EN 60529    |     |     | IP68 |      |

| Cable specification | Conditions | Min | Typ | Max         | Unit |
|---------------------|------------|-----|-----|-------------|------|
| Cable type          |            |     |     | round cable |      |
| Cable material      |            |     |     | PVC         |      |
| Cross section       |            |     |     | 0,14 sq-mm  |      |

| General data      | Conditions | Min | Typ | Max                                       | Unit |
|-------------------|------------|-----|-----|-------------------------------------------|------|
| Mounting advice   |            |     |     | over 5m cable, a resistor is recommended. |      |
| Tightening torque |            |     |     | 0,5                                       | Nm   |