


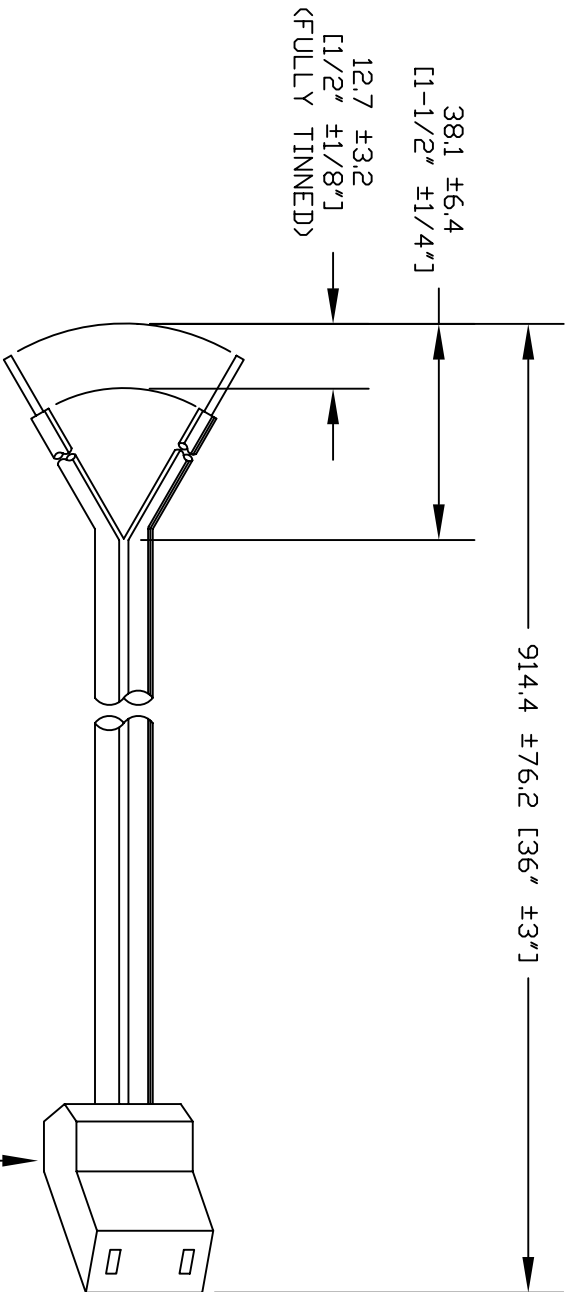

CONNECTOR: PHX707 A
COLOR: BLACK

VOLEX RESERVES THE RIGHT
TO ALTER NON-CRITICAL
DIMENSIONS WITHOUT NOTICE.

- NOTES:
- 1) CORDAGE: 18/2/SPT-1/105°C/BLACK
 - 2) APPROVALS: UL/CSA WIRING HARNESS.
 - 3) RATING: 1 AMP/250 VDLTS
 - 4) FLAME RATING : VW1
 - 5) CORDAGE DIMENSIONS: .110" X .220" REF.
 - 6) CORD IS NOT POLARIZED. RIBBED LEAD WILL NOT ALWAYS BE IN SAME POSITION WITH REFERENCE TO THE CONNECTOR.
 - 7) PACKAGING: 100 PIECES PER CARTON.
 - 8) ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE NOTED.

1		C.U.D - NEW RELEASE		5/26/05
REV		DESCRIPTION		DATE

SCALE: NOT TO SCALE	ECD: N/A	ITEM DESCRIPTION APPLANCE CORD FOR COOLING FAN		
		APPROVED	DRAWN BY STC	DATE: 5/26/05



CUD

- ☒ Indianapolis, IN
- ☐ Conover, N.C.
- ☐ Freemont, CA
- ☐ Aguascalientes, MX
- ☐ Tijuana, Mexico
- ☐ Hermosillo, MX
- ☐ Clinton, AR
- ☐ Kanata, Canada

Proprietary Notice:

This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

MATERIAL:
PLUG: PVC, BLACK
JACKET: PVC, BLACK

FINISH:

TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	
.XXX ± .005			
.XX ± .02			
.X ± .03			
FRACT. ± 1/32			
ANGULAR ± 1/2°			

17903 10 B1