
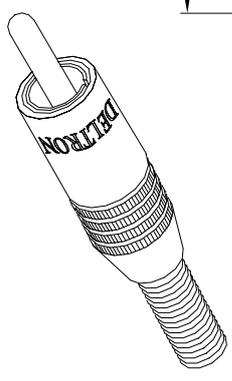


- Designed and manufactured in the UK to the highest quality standards for use with Professional Audio Equipment.
- Solid centre conductor of gold plated machined brass with large solder bucket for easy soldering.
- Ground contact machined from solid brass with gold plated, unique 'T' shaped slot for effective spring contact pressure.
- Large crimpable cable clamp for strong and secure cable connection.
- Solid brass body effectively shields connector providing 100% shielding.
- PTFE insulation for high dielectric constant
- Spring strain relief.
- Maximum cable size 5.5mm
- Attractive styling finished in black chrome with printed colour coding.

Dimensions

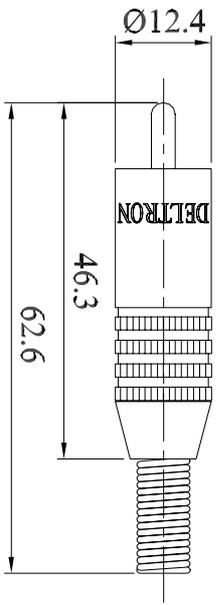

- Material**
- Centre contact** :Brass, 0.5 micron gold plated
- Ground contact** :Brass, 0.5 micron gold plated
- Insulation** :PTFE
- Cable clamp** :Brass, 0.5 micron gold plated
- Spring** :Spring steel, black chrome plated
- Cap** :Brass, black chrome plated
- Ratings –**
- 5A at 200 Vdc/150 Vac max.
- Insulation Resistance –**
- 100M Ω at 500 Vdc

Deltron Part No.	Description
321-0000	BLACK CHROME CAP & SPRING
321-0500	BLACK CHROME CAP & SPRING (RED COLOUR CODING)
321-0600	BLACK CHROME CAP & SPRING (WHITE COLOUR CODING)

CONVERTED FROM PS0364 ISS3 (05.06.95) IN JAN 2003

Drgn No 321 SERIES TITLE HIGH END PROFESSIONAL PHONO LINE PLUG ALL DIMENSIONS IN MM ANGLES IN DECIMAL DEGREES

DELTRON Components  **ISS 3** GENERAL SPECIFICATION FOR 321 SERIES CUSTOMER FILTER REF