

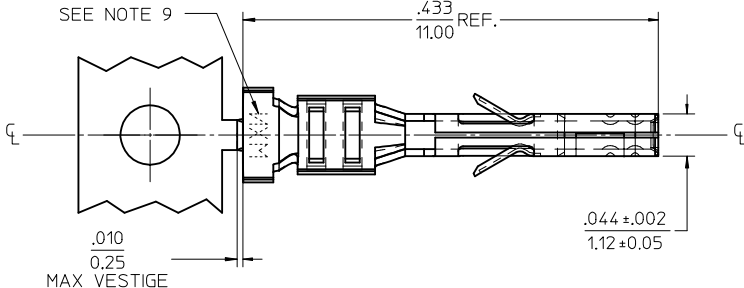
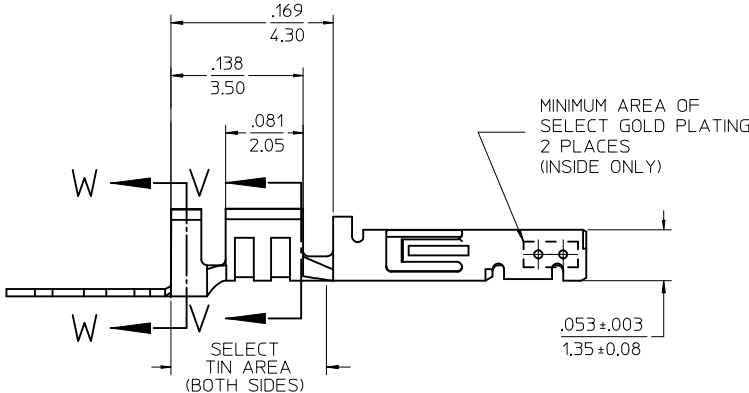



13	12	11	10	9	8	7	6	5	4	3	2	1																																																																																							
<table><tr><td>WIRE SIZE</td><td>MAX INSULATION</td><td>"A" ±.012 ±0.30</td><td>"C" ±.012 ±0.30</td><td>"D" ±.005 ±0.13</td><td>"E" ±.012 ±0.30</td><td>"G" ±.005 ±0.13</td><td>"H" ±.012 ±0.30</td></tr><tr><td>20-24</td><td>.073/1.85</td><td>.090/2.29</td><td>.100/2.54</td><td>.030/0.76 R.</td><td>.075/1.91</td><td>.025/0.64 R.</td><td>.082/2.08</td></tr><tr><td>26-30</td><td>.050/1.27</td><td>.075/1.91</td><td>.083/2.10</td><td>.025/0.64 R.</td><td>.058/1.47</td><td>.020/0.51 R.</td><td>.065/1.65</td></tr><tr><td>18 OR 0.75mm²</td><td>.073/1.85</td><td>.091/2.31</td><td>.099/2.51</td><td>.030/.076 R.</td><td>.086/2.18</td><td>.029/0.74 R.</td><td>.094/2.39</td></tr></table>								WIRE SIZE	MAX INSULATION	"A" ±.012 ±0.30	"C" ±.012 ±0.30	"D" ±.005 ±0.13	"E" ±.012 ±0.30	"G" ±.005 ±0.13	"H" ±.012 ±0.30	20-24	.073/1.85	.090/2.29	.100/2.54	.030/0.76 R.	.075/1.91	.025/0.64 R.	.082/2.08	26-30	.050/1.27	.075/1.91	.083/2.10	.025/0.64 R.	.058/1.47	.020/0.51 R.	.065/1.65	18 OR 0.75mm²	.073/1.85	.091/2.31	.099/2.51	.030/.076 R.	.086/2.18	.029/0.74 R.	.094/2.39	<table><tr><td>MATERIAL NUMBER</td><td>PLATING</td><td>WIRE SIZE</td><td>FORM</td></tr><tr><td>43030-0001</td><td>A</td><td>20-24</td><td>CHAIN</td></tr><tr><td>43030-0002</td><td>B</td><td>20-24</td><td>CHAIN</td></tr><tr><td>43030-0003</td><td>C</td><td>20-24</td><td>CHAIN</td></tr><tr><td>43030-0004</td><td>A</td><td>26-30</td><td>CHAIN</td></tr><tr><td>43030-0005</td><td>B</td><td>26-30</td><td>CHAIN</td></tr><tr><td>43030-0006</td><td>C</td><td>26-30</td><td>CHAIN</td></tr><tr><td>43030-0007</td><td>A</td><td>20-24</td><td>LOOSE</td></tr><tr><td>43030-0008</td><td>B</td><td>20-24</td><td>LOOSE</td></tr><tr><td>43030-0009</td><td>C</td><td>20-24</td><td>LOOSE</td></tr><tr><td>43030-0010</td><td>A</td><td>26-30</td><td>LOOSE</td></tr><tr><td>43030-0011</td><td>B</td><td>26-30</td><td>LOOSE</td></tr><tr><td>43030-0012</td><td>C</td><td>26-30</td><td>LOOSE</td></tr><tr><td>43030-0038</td><td>A</td><td>18 OR 0.75mm² (SEE NOTE 10)</td><td>CHAIN</td></tr></table>				MATERIAL NUMBER	PLATING	WIRE SIZE	FORM	43030-0001	A	20-24	CHAIN	43030-0002	B	20-24	CHAIN	43030-0003	C	20-24	CHAIN	43030-0004	A	26-30	CHAIN	43030-0005	B	26-30	CHAIN	43030-0006	C	26-30	CHAIN	43030-0007	A	20-24	LOOSE	43030-0008	B	20-24	LOOSE	43030-0009	C	20-24	LOOSE	43030-0010	A	26-30	LOOSE	43030-0011	B	26-30	LOOSE	43030-0012	C	26-30	LOOSE	43030-0038	A	18 OR 0.75mm² (SEE NOTE 10)	CHAIN
WIRE SIZE	MAX INSULATION	"A" ±.012 ±0.30	"C" ±.012 ±0.30	"D" ±.005 ±0.13	"E" ±.012 ±0.30	"G" ±.005 ±0.13	"H" ±.012 ±0.30																																																																																												
20-24	.073/1.85	.090/2.29	.100/2.54	.030/0.76 R.	.075/1.91	.025/0.64 R.	.082/2.08																																																																																												
26-30	.050/1.27	.075/1.91	.083/2.10	.025/0.64 R.	.058/1.47	.020/0.51 R.	.065/1.65																																																																																												
18 OR 0.75mm²	.073/1.85	.091/2.31	.099/2.51	.030/.076 R.	.086/2.18	.029/0.74 R.	.094/2.39																																																																																												
MATERIAL NUMBER	PLATING	WIRE SIZE	FORM																																																																																																
43030-0001	A	20-24	CHAIN																																																																																																
43030-0002	B	20-24	CHAIN																																																																																																
43030-0003	C	20-24	CHAIN																																																																																																
43030-0004	A	26-30	CHAIN																																																																																																
43030-0005	B	26-30	CHAIN																																																																																																
43030-0006	C	26-30	CHAIN																																																																																																
43030-0007	A	20-24	LOOSE																																																																																																
43030-0008	B	20-24	LOOSE																																																																																																
43030-0009	C	20-24	LOOSE																																																																																																
43030-0010	A	26-30	LOOSE																																																																																																
43030-0011	B	26-30	LOOSE																																																																																																
43030-0012	C	26-30	LOOSE																																																																																																
43030-0038	A	18 OR 0.75mm² (SEE NOTE 10)	CHAIN																																																																																																
  SECTION V-V SECTION W-W    (SCALE 20:1) NOTES 1) MATERIAL: PHOSPHOR BRONZE ALLOY 2) TERMINAL PLATING: "A" - HOT TIN DIP: .000040/0.00102 MIN. "B" - .000015/0.00038 MIN. SELECT GOLD .000100/0.00254 MIN. SELET TIN ALL OVER .000050/0.00127 MIN. NICKEL OVERALL. "C" - .000030/0.00076 MIN. SELECT GOLD .000100/0.00254 MIN. SELECT TIN ALL OVER .000050/0.00127 MIN. NICKEL OVERALL. MATERIAL NUMBERS WITH SELECT PLATING ARE POST PLATED. 3) PRODUCT SPECIFICATION: PS-43045, PS-43650, PS-44300-001. 4) PACKAGING SPECIFICATION: PK-43030-001 (REEL), PK-43030-003 (LOOSE). 5) TERMINAL FOR USE IN A MICRO FIT RECEPTACLE #43025-****, 43645-****, AND 44133-****. 6) FOR TERMINAL ORIENTATION IN RECEPTACLE SEE DRAWING #SDA-43025 OR SDA-43645. 7) THIS TERMINAL IS DESIGNED IN METRIC. 8) MOLEX RECOMMENDS THE USE OF MICRO-FIT TEST PLUG (SERIES 44242) WHENEVER CONTINUITY TESTING IS PERFORMED. TEST PLUGS MUST NOT BE USED TO MAKE OR BREAK UNDER LOAD. MOLEX DOES NOT RECOMMEND USING STANDARD MATING COMPONENTS (SERIES 43020, 43045, 43640, 43650, OR 43031) FOR HARNESS TESTING PURPOSES. 9) MARKING MAY VARY ON PARTS. CONSULT FACTORY. 10) PART NUMBER 43030-0038 IS DESIGNED FOR 18 AWG 1061 STYLE WIRE OR A .073/1.85 MAXIMUM INSULATION OUTSIDE DIAMETER.																																																																																																			
12	11	10	9	8	7	6	5	4	3	2	1																																																																																								