


Modular Phone Plug

154-7623-6

KOBICONN

Modular Phone Plug

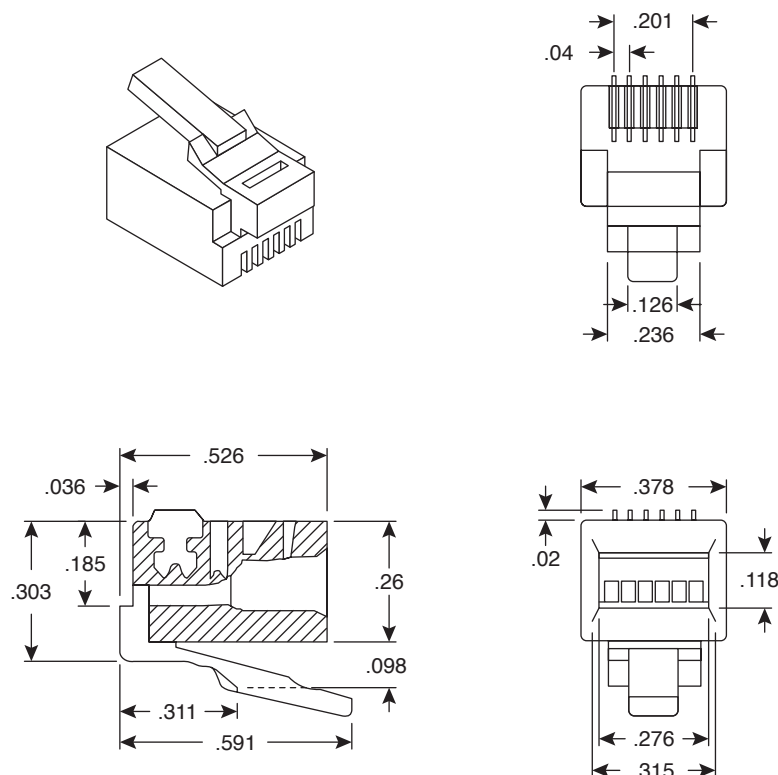

DIMENSIONS IN

SPECIFICATIONS	
Type:	6P6C, RJ12 (USOC), 623 (Western Electric), modular phone
Current:	1.5A max.
Voltage:	150VAC max.
Dielectric Withstand Voltage:	1000VAC RMS, 60Hz for 1 minute
Contact Resistance:	20mΩ max.
Insulation Resistance:	500MΩ min.
Working Temperature:	-40°C ~ +80°C
Cable ~ Plug Tensile Strength:	17 lbs. (7.7Kg) min.
Contact:	6μ gold plated phosphor bronze
Housing:	Polycarbonate
Color	Clear

Date Last Revised: 10-15-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300632

154-7623-6