

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [75710-1008](#)
Status: **Active**
Overview: GbX I-Trac™ Backplane Connector System
Description: GbX I-Trac™ Right-Angle Daughtercard Module, 1.85mm by 3.70mm Pitch, Unguided, 11 Rows, 8 Columns, 176 Circuits

Documents:

3D Model	Test Summary TS-75710-998 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-75710-999 (PDF)	

Agency Certification

UL	E29179
----	--------

General

Product Family	Backplane Connectors
Series	75710
Application	Coplanar, Daughtercard
Component Type	PCB Receptacle
Overview	GbX I-Trac™ Backplane Connector System
Product Name	GbX I-Trac™
Style	N/A
UPC	822350838078

Physical

Circuits (Loaded)	176
Circuits (maximum)	176
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	21.828/g
Number of Columns	8
Number of Pairs	Open Pin Field
Number of Rows	11
Orientation	Right Angle
PC Tail Length	2.00mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	1.85mm, 3.70mm
Pitch - Termination Interface	1.00mm, 2.70mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to PCB	No
Stackable	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +80°C
Termination Interface: Style	Through Hole - Compliant Pin

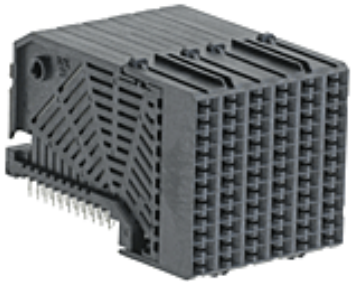


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[75710Series](#)

Mates With

[75705](#) GbX I-Trac™ Vertical Header
Module. [75910](#) GbX I-Trac™ Right Angle
Header Module

Use With

[78234](#) GbX I-Trac™ Right Angle Power
Header. [76153](#) Pirate Cannon Wide Guide
Module

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description

Press-In Tool
for Right Angle
Receptacle and

Product #

[0622018618](#)

Electrical

Current - Maximum per Contact	1A
Data Rate	12.0 Gbps
Shield Type	N/A
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Product Specification	PS-75710-999
Sales Drawing	SD-75710-001
Test Summary	TS-75710-998

Header 11-Row, 8-Column	
Daughter Card	<u>0622023000</u>
Signal Module	
Removal Tool	

This document was generated on 07/03/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION