

PBD 1211 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A, flux-proof



Description

- PCB Mounting
- Test Jack, diameter 2.0 mm
- measuring and testing during operation
- Open, close with test probe
- Resilient contacts, gold plated
- Flux-proof

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Detailed request for product](#)

Technical Data


Diameter	2 mm
Rated Current	6.3 A
Contact resistance	< 10 mΩ at 20 mV
Insulation Resistance	> 5 MΩ (500 VDC; 1 min)
Dielectric strength	> 2 kV (50 Hz; 1 min)
Clearance and Creepage Distance	> 2 mm
Allowable Operation Temp.	-25 °C to 70 °C

Resistance to Vibration	acc. to IEC 60068-2-6, test Fc
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Weight	0.6 g
Material: Housing	Thermoplastic (PC), UL 94V-2
Surface of contacts	gold plated, Thickness 2.5 μm

Dimensions

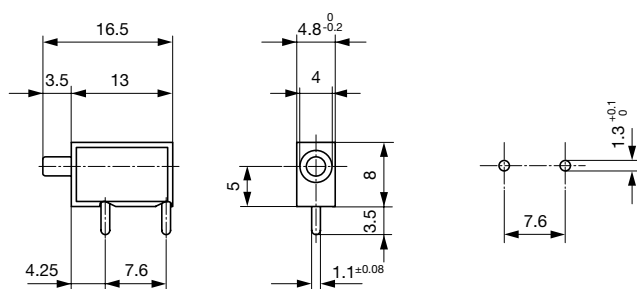

Diagrams



Variants

Product group	Color	Order Number
Test Jack	black	0040.1211
Test Jack	red	0040.1212

Mating Inlets/Plugs

Category / Description



[Test Jacks & Probes Overview complete](#)

PS 1061 Test Probe, Ø 2 mm, 10 A

PS 1061

[Test Jacks & Probes further types to PBD 1211](#)