



Technical drawing of a U-shaped cross-section. The width of the top flange is labeled E . The height of the vertical stem is labeled (G) . The cross-section is filled with diagonal hatching.

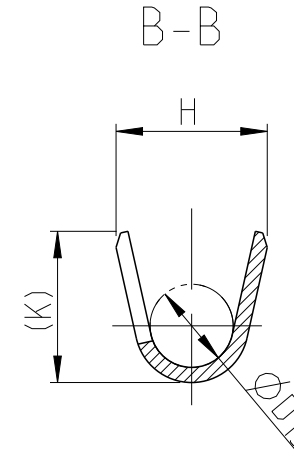


Kontaktkoerper / BODY
MATERIAL: CuNiSi
Oberflaeche: Sn
SURFACE: Sn

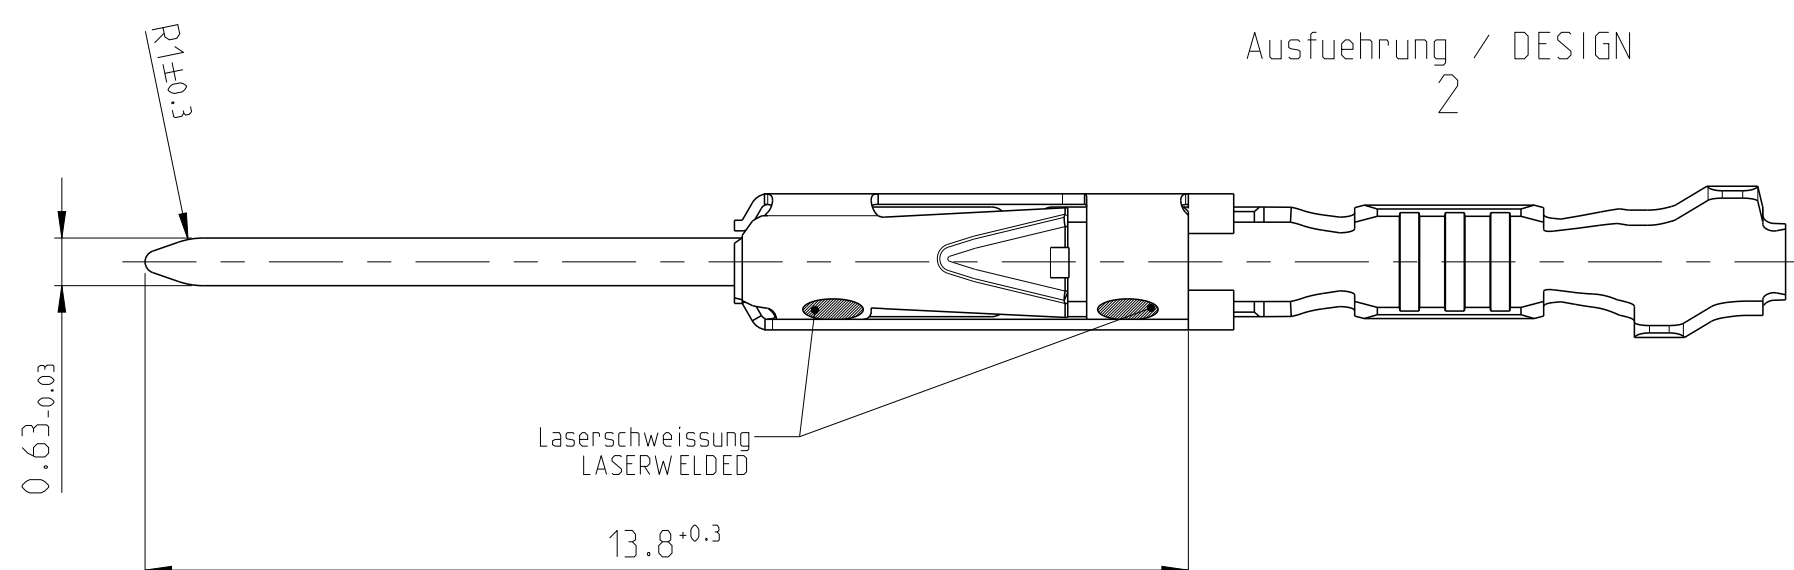


Darstellung ohne Ueberfederung
SHOWN WITHOUT SPRING

Ausführung / DESIGN
1


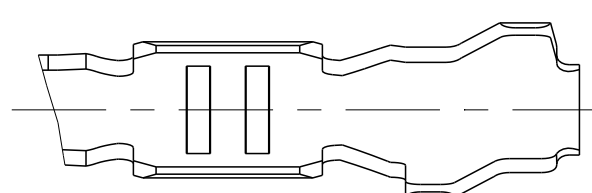


B-E

Einzel dichtungs system
SINGLE WIRE SEAL SYSTEM

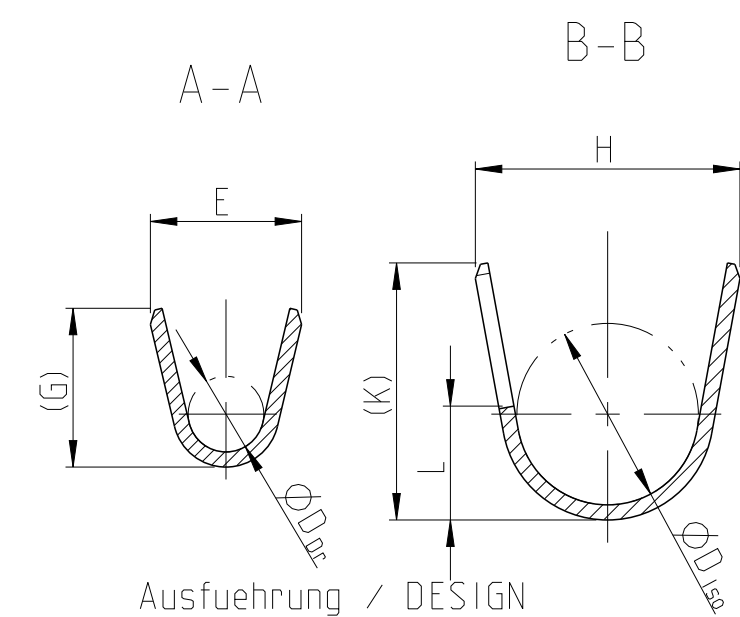
[illegible]

Ausführung / DESIGN

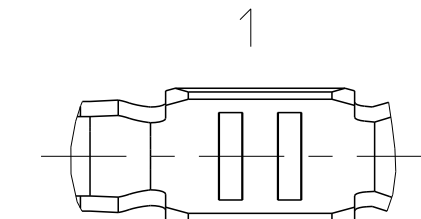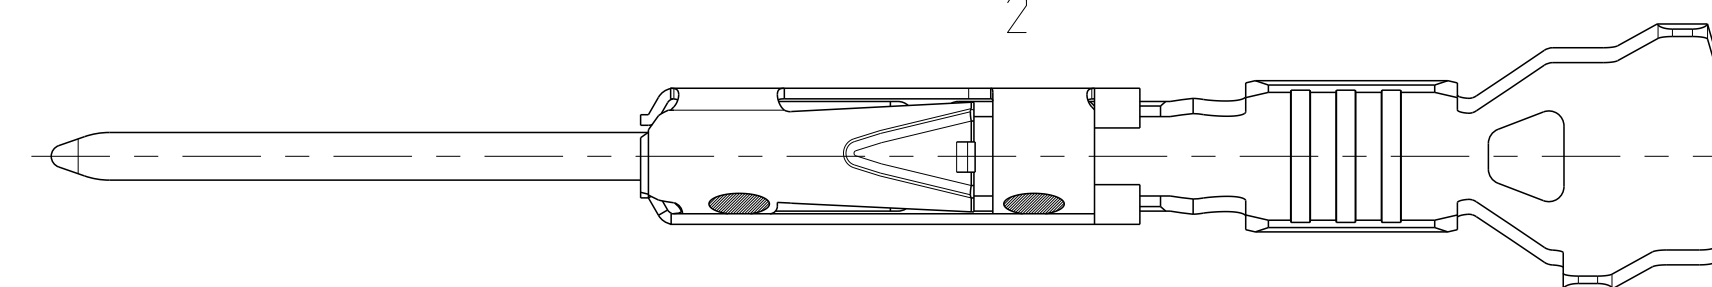

Laserschweißung
LASERWELDED

1.45


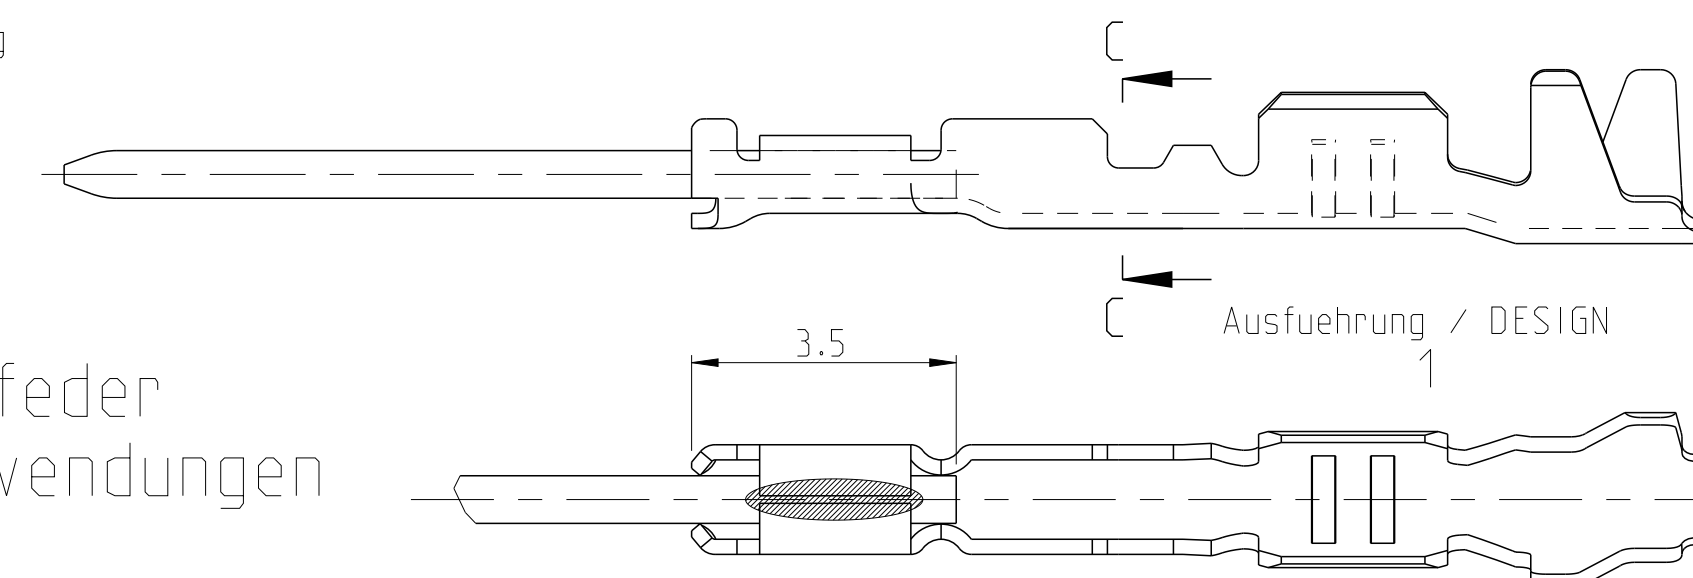


Ausführung / DESIGN

Ausführung ohne Ueberfeder
nur fuer umspritzte Anwendungen
WITHOUT SPRING
ONLY FOR OVERMOLDING

Bemerkungen

- 1 Datumcode (woche/Jahr z.B. KW 38/Jahr 2009)
und TE-Revision (z.B. Rev.A)
DATE CODE (WEEK/YEAR E.G. WEEK NUMBER 38/YEAR2009)
AND TE REVISION (E.G. REV. A)
- 2 Passend zu Buchsenkontakt siehe Zeichnung 929454
SUITABLE FOR SOCKET CONTACT SEE DRAWING 929454
- 3 Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- 4 Nur fuer FLR-Leitung nach DIN 72551 Teil 6
FOR FLR-CONDUCTOR ACCORDING TO DIN 72551-6 ONLY
- 5 nicht fuer Neuanwendung
NOT FOR NEW APPLICATION
- 6 zugverstaerkte Leitung nach LV 112-4
REINFORCED WIRE ACCORDING LV 112-4
- 7 Bei doppelt fallenden Werkzeugen wird die erste Ueberfeder
mit einer Kennzeichnung "-L" versehen
WITH DOUBLE OUT DIES THE FIRST SPRING WILL BE PROVIDED
WITH AN INDICATION "-L"

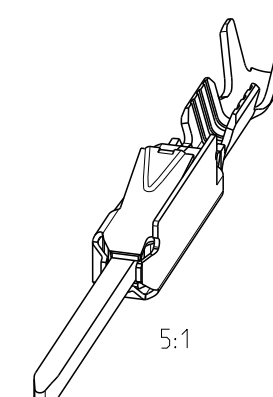

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.Garcia 06JAN1999 CHK R.Jetter 06JAN1999 APVD M.Bleicher 13AUG2003		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 		NAME MQS Tabellenzeichnung Stiftkontakt TABLE PIN CONTACT	
		PRODUCT SPEC 108-18030 APPLICATION SPEC 114-18021 / 18025		SIZE A1	
MATERIAL -		FINISH -		DRAWING NO C=929453	
WEIGHT -		RESTRICTED TO -		SCALE 10:1	
Customer Drawing		SHEET 1 of 1		REV 21	