


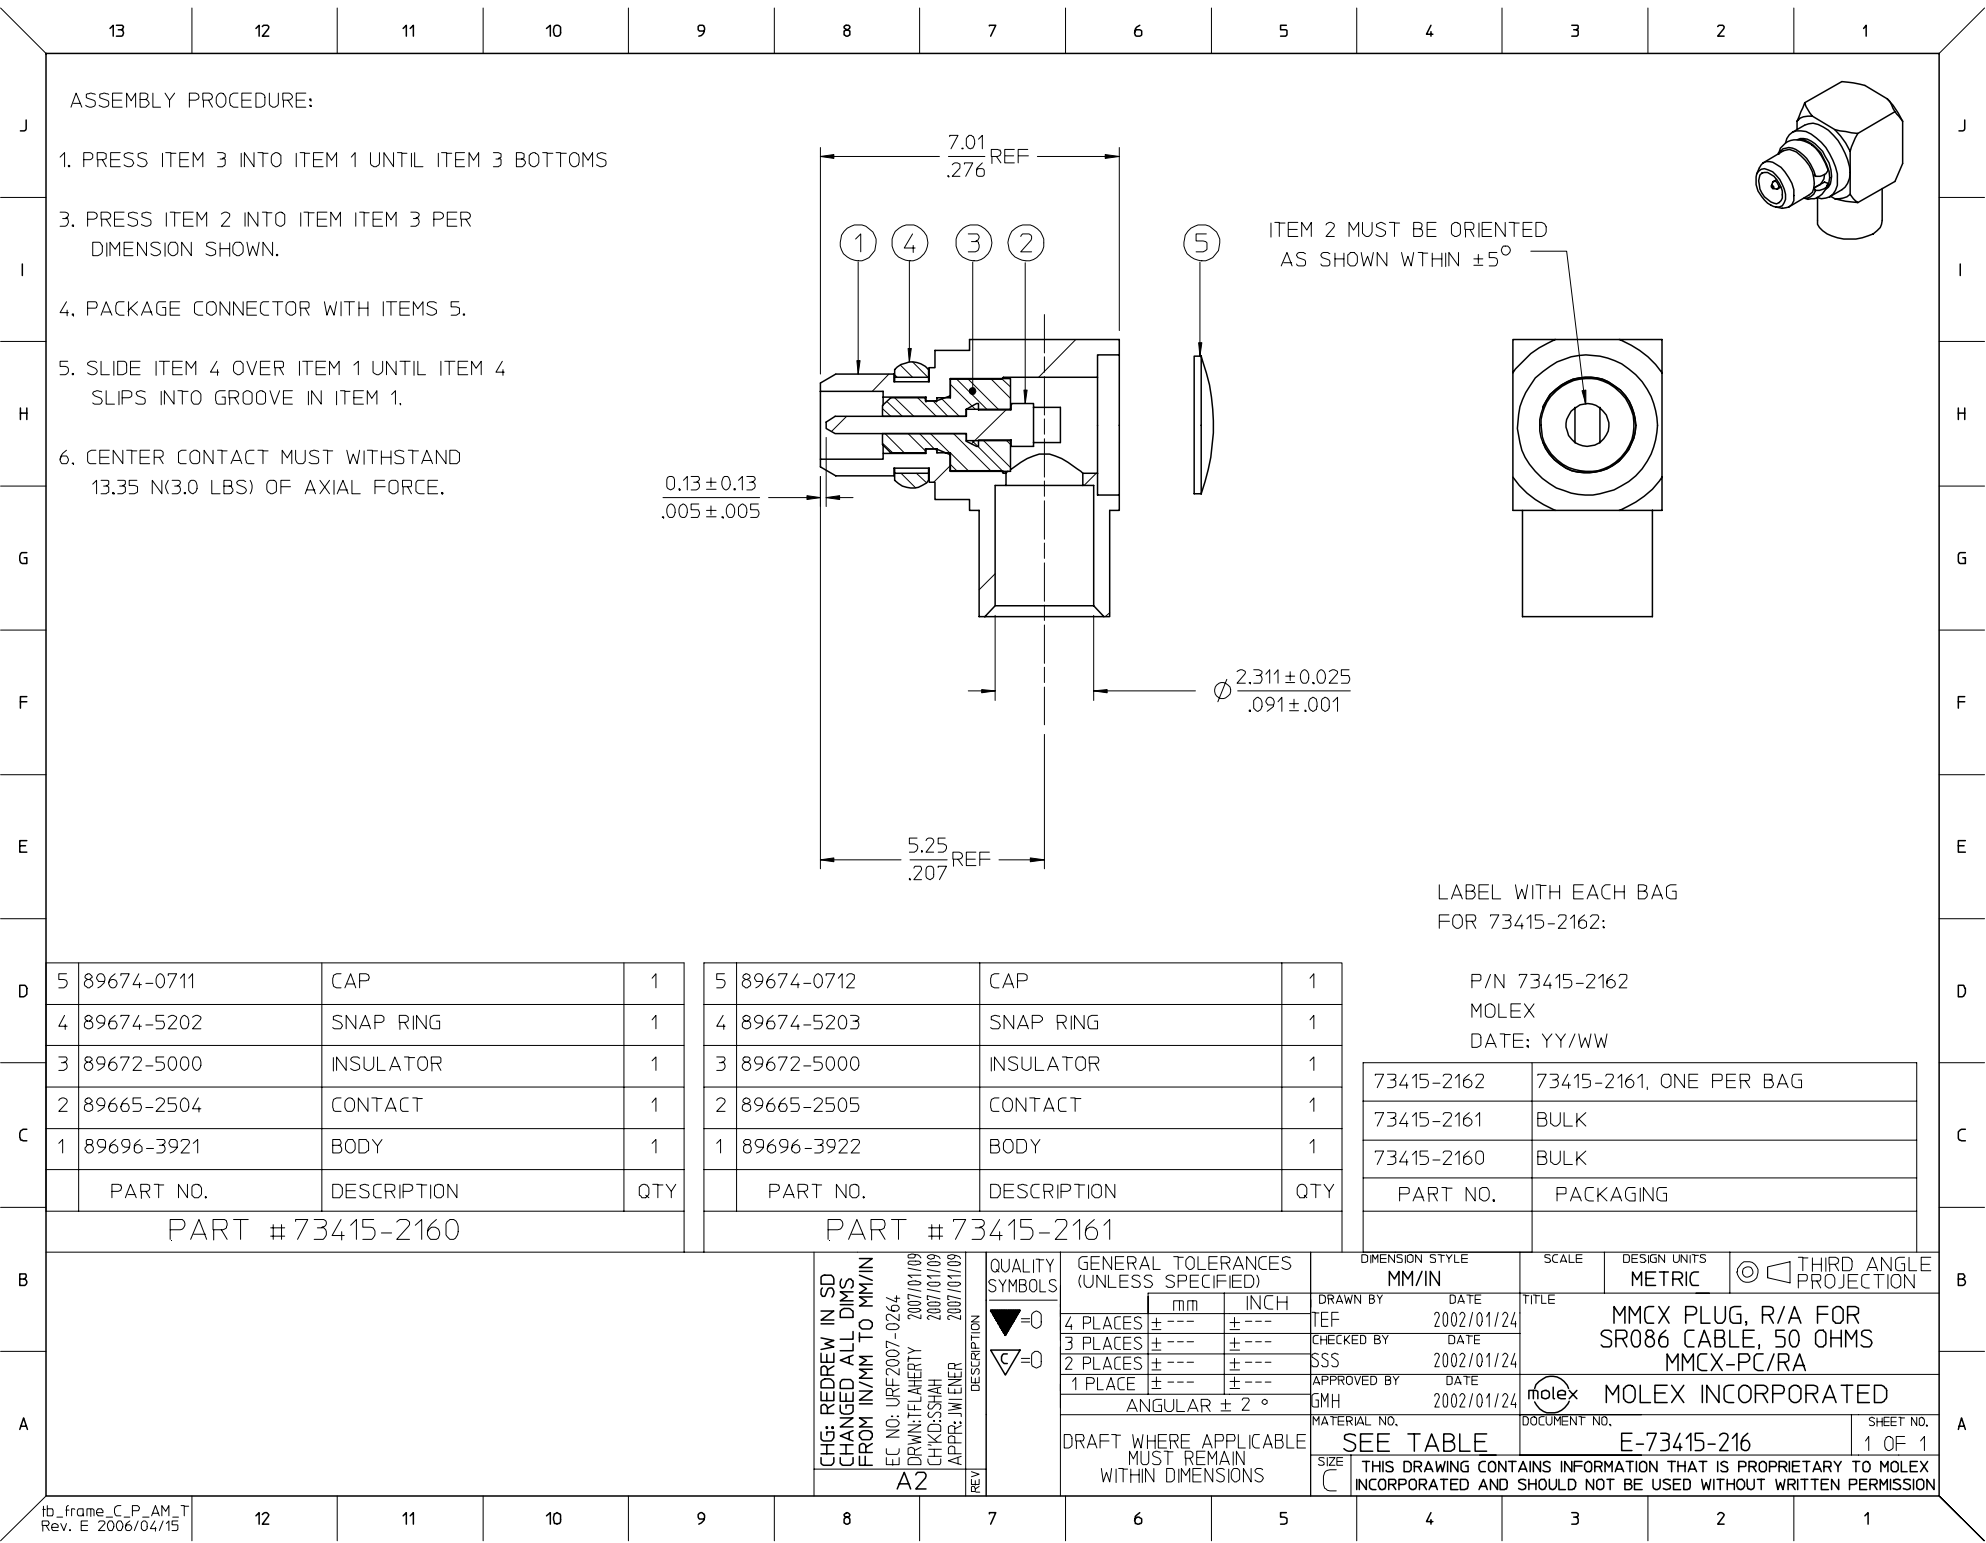

ASSEMBLY PROCEDURE:

1. PRESS ITEM 3 INTO ITEM 1 UNTIL ITEM 3 BOTTOMS
3. PRESS ITEM 2 INTO ITEM ITEM 3 PER DIMENSION SHOWN.
4. PACKAGE CONNECTOR WITH ITEMS 5.
5. SLIDE ITEM 4 OVER ITEM 1 UNTIL ITEM 4 SLIPS INTO GROOVE IN ITEM 1.
6. CENTER CONTACT MUST WITHSTAND 13.35 N(3.0 LBS) OF AXIAL FORCE.

ITEM 2 MUST BE ORIENTED AS SHOWN WITHIN $\pm 5^\circ$

LABEL WITH EACH BAG FOR 73415-2162:

P/N 73415-2162
MOLEX
DATE: YY/WW

73415-2162	73415-2161, ONE PER BAG
73415-2161	BULK
73415-2160	BULK
PART NO.	PACKAGING

PART # 73415-2160				PART # 73415-2161			
5	89674-0711	CAP	1	5	89674-0712	CAP	1
4	89674-5202	SNAP RING	1	4	89674-5203	SNAP RING	1
3	89672-5000	INSULATOR	1	3	89672-5000	INSULATOR	1
2	89665-2504	CONTACT	1	2	89665-2505	CONTACT	1
1	89696-3921	BODY	1	1	89696-3922	BODY	1
PART NO. DESCRIPTION QTY				PART NO. DESCRIPTION QTY			
CHG: REDREW IN SD FROM IN/MM TO MM/IN				QUALITY SYMBOLS			
EC NO: URF2007-0264				GENERAL TOLERANCES (UNLESS SPECIFIED)			
DRAWN: TELAHARTY 2007/01/09				DIMENSION STYLE MM/IN			
CHKD: SHAH 2007/01/09				SCALE			
APPR: JIM ENEER 2007/01/09				DESIGN UNITS METRIC			
REV				THIRD ANGLE PROJECTION			
A2				TITLE			
				MMCX PLUG, R/A FOR SR086 CABLE, 50 OHMS MMCX-PC/RA			
				MOLEX INCORPORATED			
				E-73415-216			
				SHEET NO. 1 OF 1			
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

