

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0764501607

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 2 Pair Right Angle Male Header, Unguided, Open Endwall, 16 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:

3D Model

Application Specification AS-76060-990 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-76060-999 (PDF)

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

76450

Application

Coplanar

Application Tooling Documents

TM-622018799

Component Type

PCB Header

Electrical Model

Yes

Overview

Impact™ Backplane Connector and Cable Assembly System

Product Name

Impact™

UPC

883906873745

Physical

Circuits (Loaded)

96

Circuits (maximum)

96

Color - Resin

Black

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

17.044/g

Number of Columns

16

Number of Pairs

2

Number of Rows

6

Orientation

Right Angle

PC Tail Length

1.20mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.00mm

Packaging Type

Tray

Pitch - Mating Interface

1.90mm

Pitch - Termination Interface

1.90mm

Plating min - Mating

0.762µm

Polarized to PCB


No

Temperature Range - Operating

-55°C to +85°C

Termination Interface: Style

Through Hole - Compliant Pin

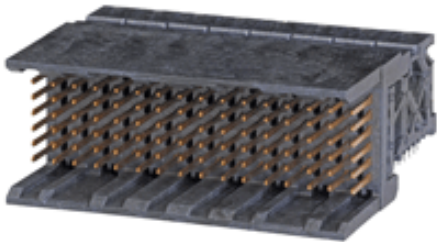

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014

December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

76450 Series

Mates With

76460 Impact™ 100 Ohm Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description

Product #

Impact™ Right Angle

0622024350

Module Removal

Tool (RAM)

Press-in-Tool for

0622018779

Daughter Card

Signal Module, 2-

Pair by 16-Column

Assemblies

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990
Electrical Model Document	EE-76450-002, EE-76450-50G
Product Specification	PS-76060-999
S-Parameter Model	SP-76450-002, SP-76450-50G
Sales Drawing	SD-76450-001
Symbol/Footprint Data	SYM-76450-1607

This document was generated on 07/02/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION