

3100 Refrigerator Door Switches *Splashproof*



E3102AA



E3111BA

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splashproof
- ▶ Changeover, momentary ON and momentary OFF
- ▶ Choice of actuators



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac

UL 85°C, file E45221, CSA file LR10990

In house test

200W 250Vac Lampload (1,000,000 operations)



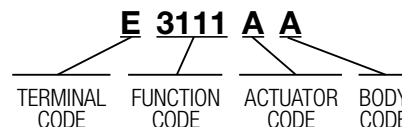
RoHS compliant






μ contact gap.

Technical data on pages 4 & 5.

Sealed terminals option available. Call factory for details.

ORDER FORMAT



▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
E  4.8 x 0.5 For sealed terminals call the factory	 3101  ON - OFF (momentary ON) 3102  ON - OFF (momentary OFF) 3111  ON - ON (momentary 1 side)	A  17.6 max B  15.6 max C  23.0 max D  17.1 max	A  Optional cut-out for orientation Panel cut-out Panel thickness 1.0 - 2.5mm	Finish Gloss finish only Color White is standard Call factory for custom colors A full range is available for large orders

Dimensions (mm) ("A" actuator shown)

3101 uses terminals 1,2

3102 uses terminals 1,2

3111 uses terminals 1,2,3

For details of actuator travel and switching angles call the factory.

