
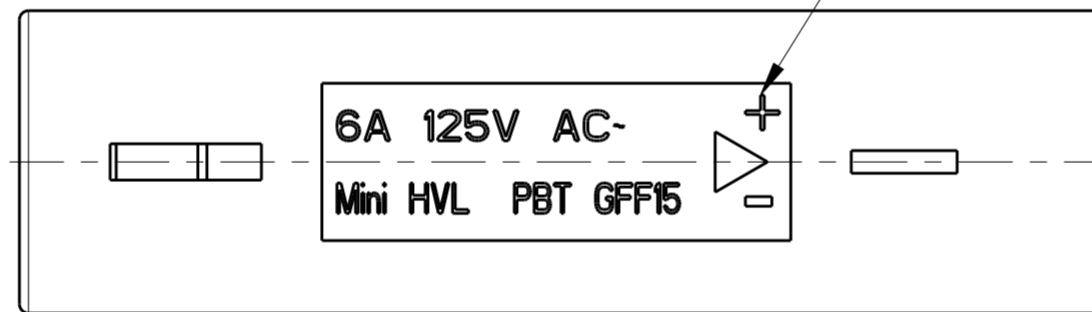
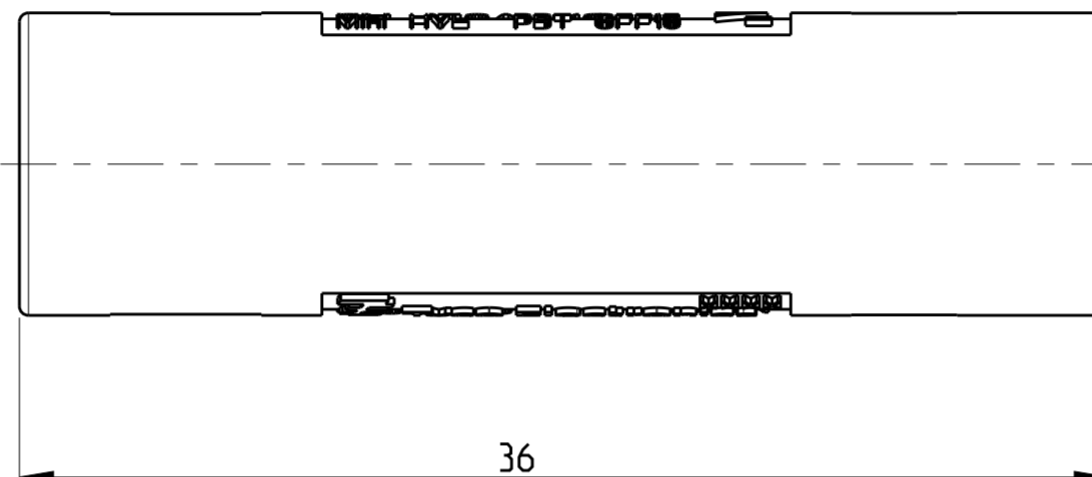
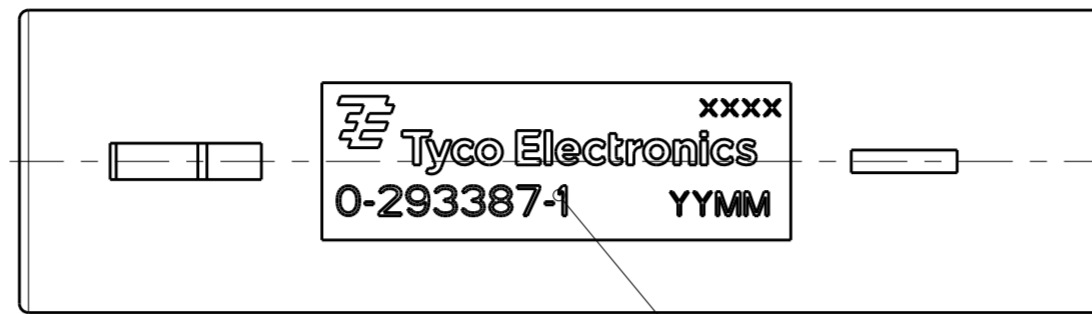



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	B1	REVISED PER ECR-13-003447	11MAR2013	RS	DD		

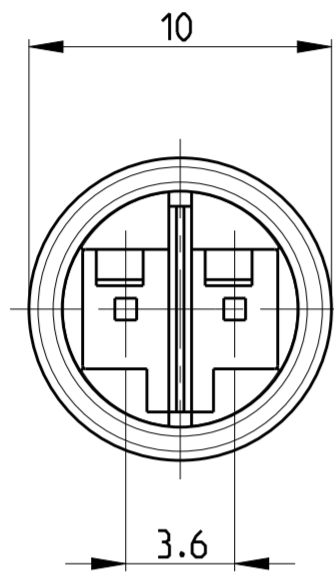

- Remarks:
1. cavities designed for MQS pin contact PN 1740335-x
 2. Counterpart is Plug PN 293388-x
- 3 Polarity marking +/- permanent / usable for DC version
 - 4 PN specific marking
 - 5 PBT 15GF, UL 94 V0 WHITE COLOR

P/N 293387-1 AS SHOWN

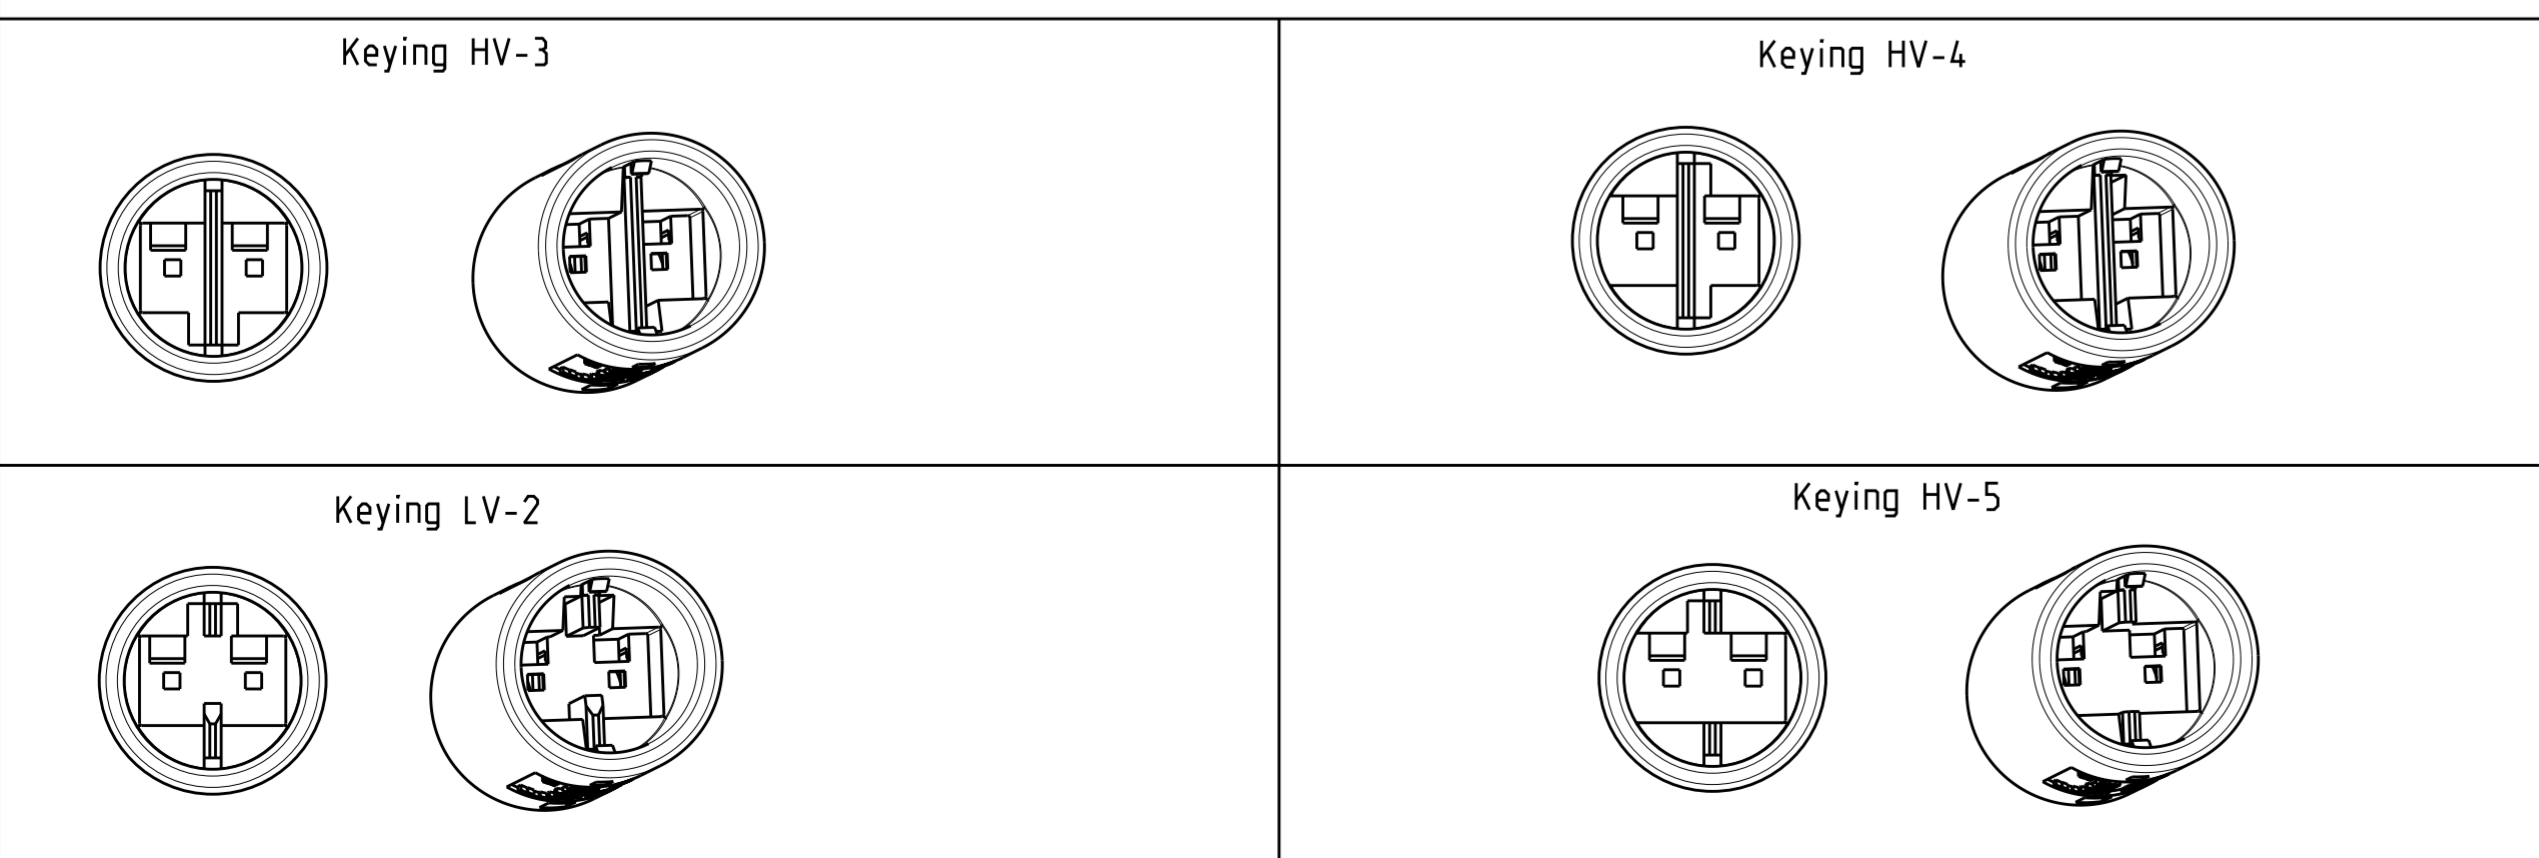

Note	Keying	PN	Rev.	REMARKS	Marking	COLOR/MATERIAL
	LV-2	293387-4	B	LOW-VOLTAGE 42V DC	7A/42V DC =	WHITE 5
	HV-5	293387-3	B	HIGH-VOLTAGE 125V AC	6A/125V AC ~	WHITE 5
	HV-4	293387-2	B	HIGH-VOLTAGE 125V AC	6A/125V AC ~	WHITE 5
	HV-3	293387-1	B	HIGH-VOLTAGE 125V AC	6A/125V AC ~	WHITE 5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN A. Vecchia 12FEB2009	TE Connectivity NAME Mini HVL 7.5mm Lighting System Outlet SIZE A2 CAGE CODE 00779 DRAWING NO C-293387 RESTRICTED TO -
		CHK G. Turco 12FEB2009	
		APVD G. Turco 12FEB2009	
		PRODUCT SPEC -	
MATERIAL 5	FINISH -	APPLICATION SPEC -	WEIGHT 2.2g

Customer Drawing SCALE 3:1 SHEET 1 OF 1 REV B1