
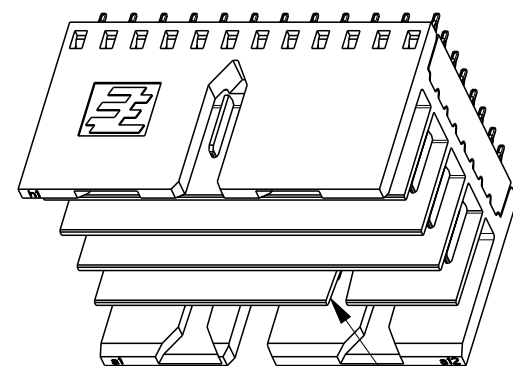
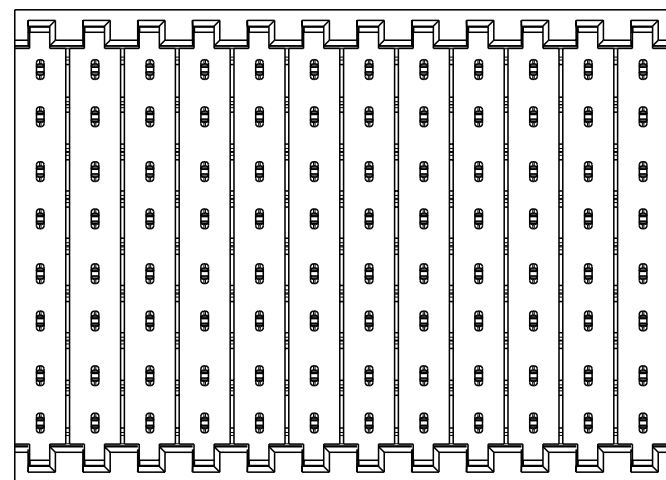
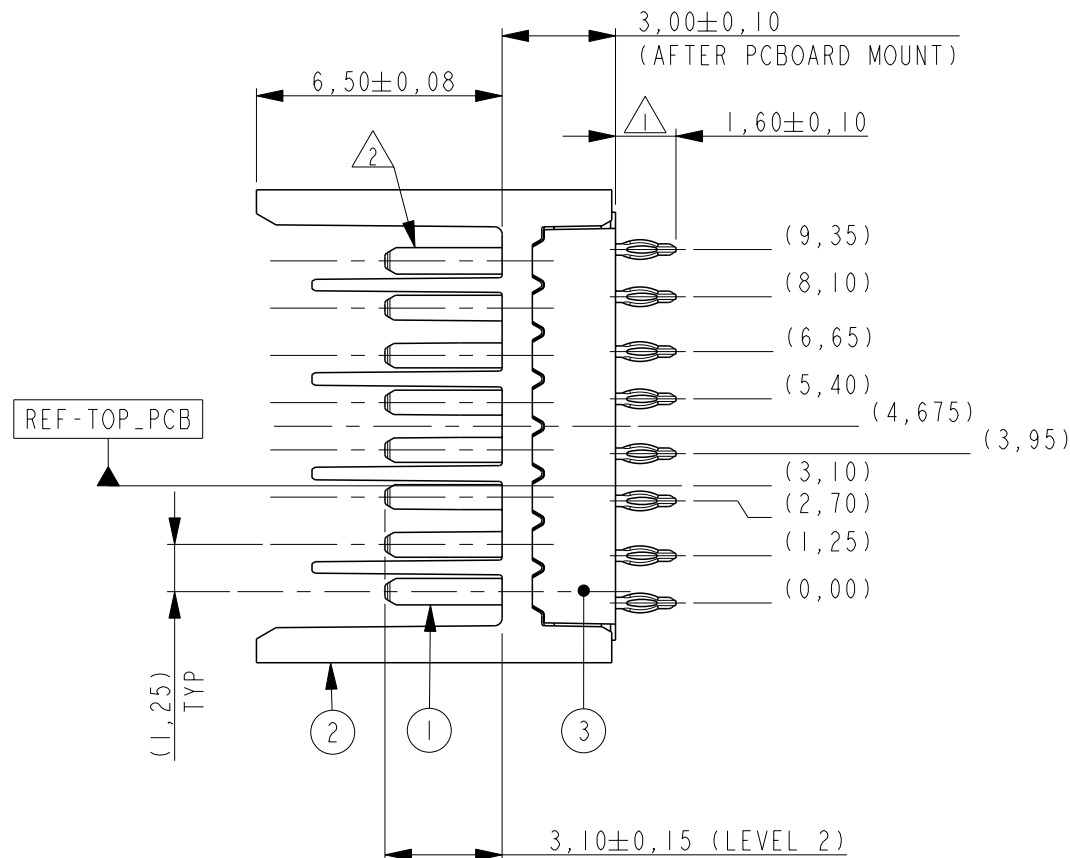
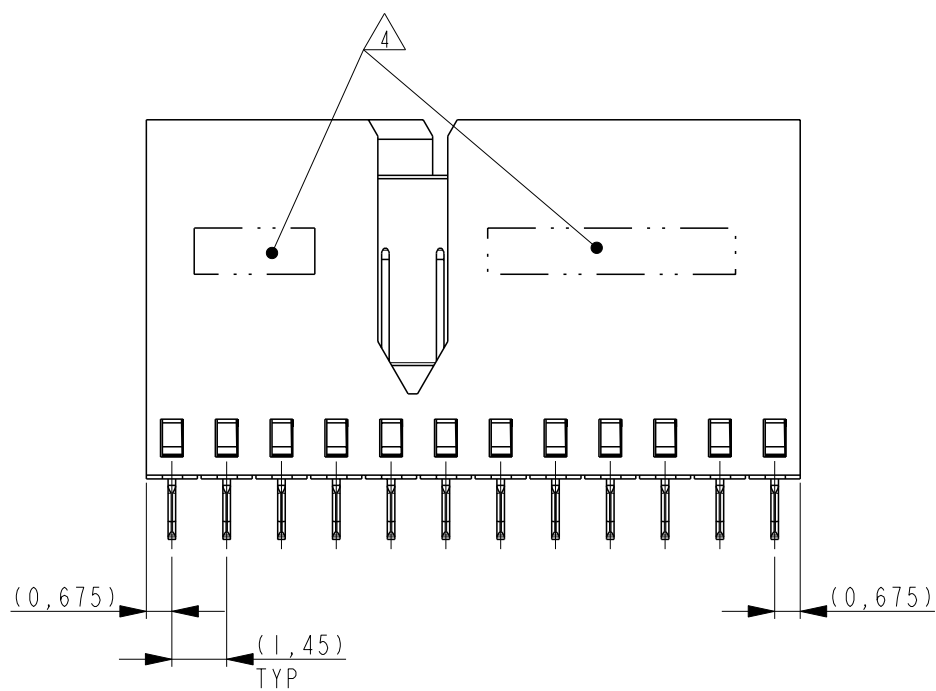
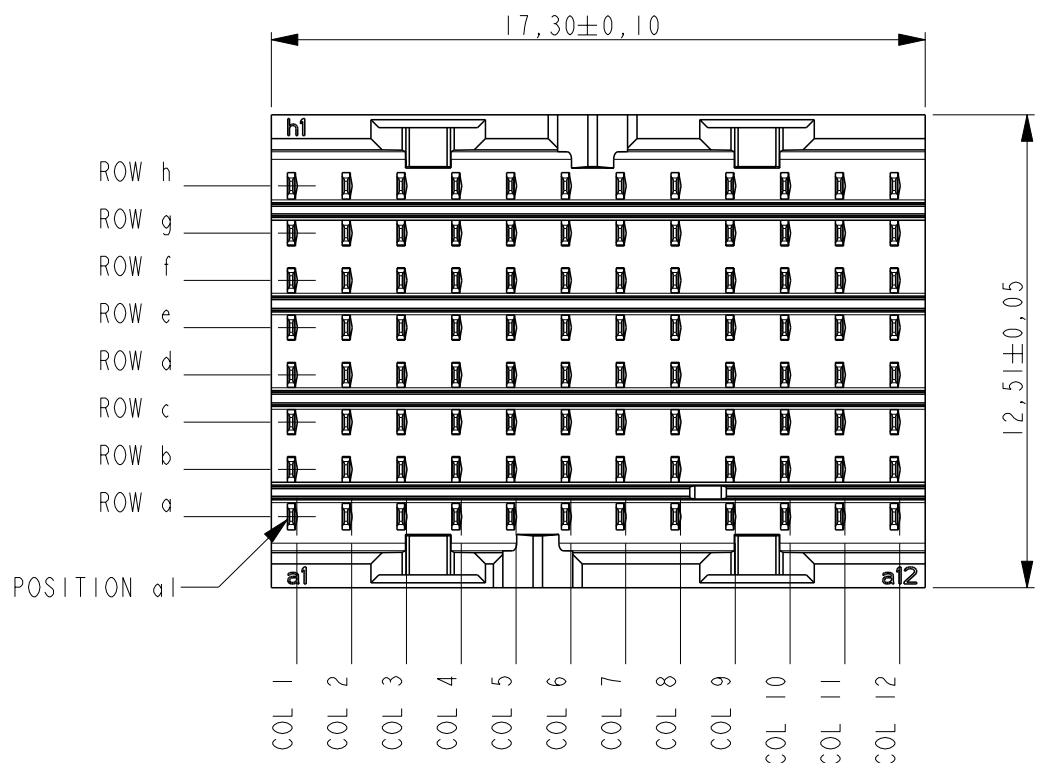


D


C

B

A

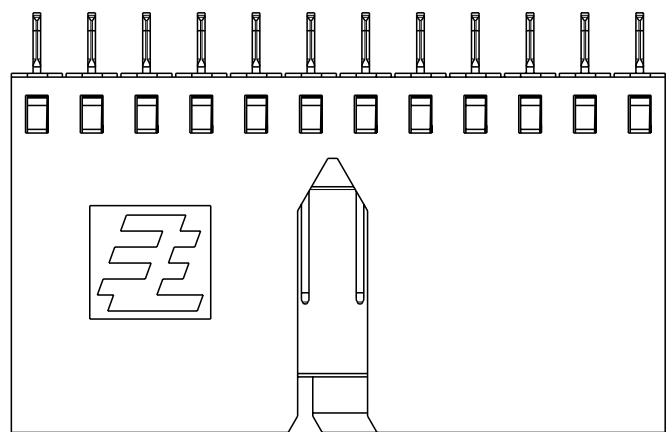

SCALE 3:1
KEYING

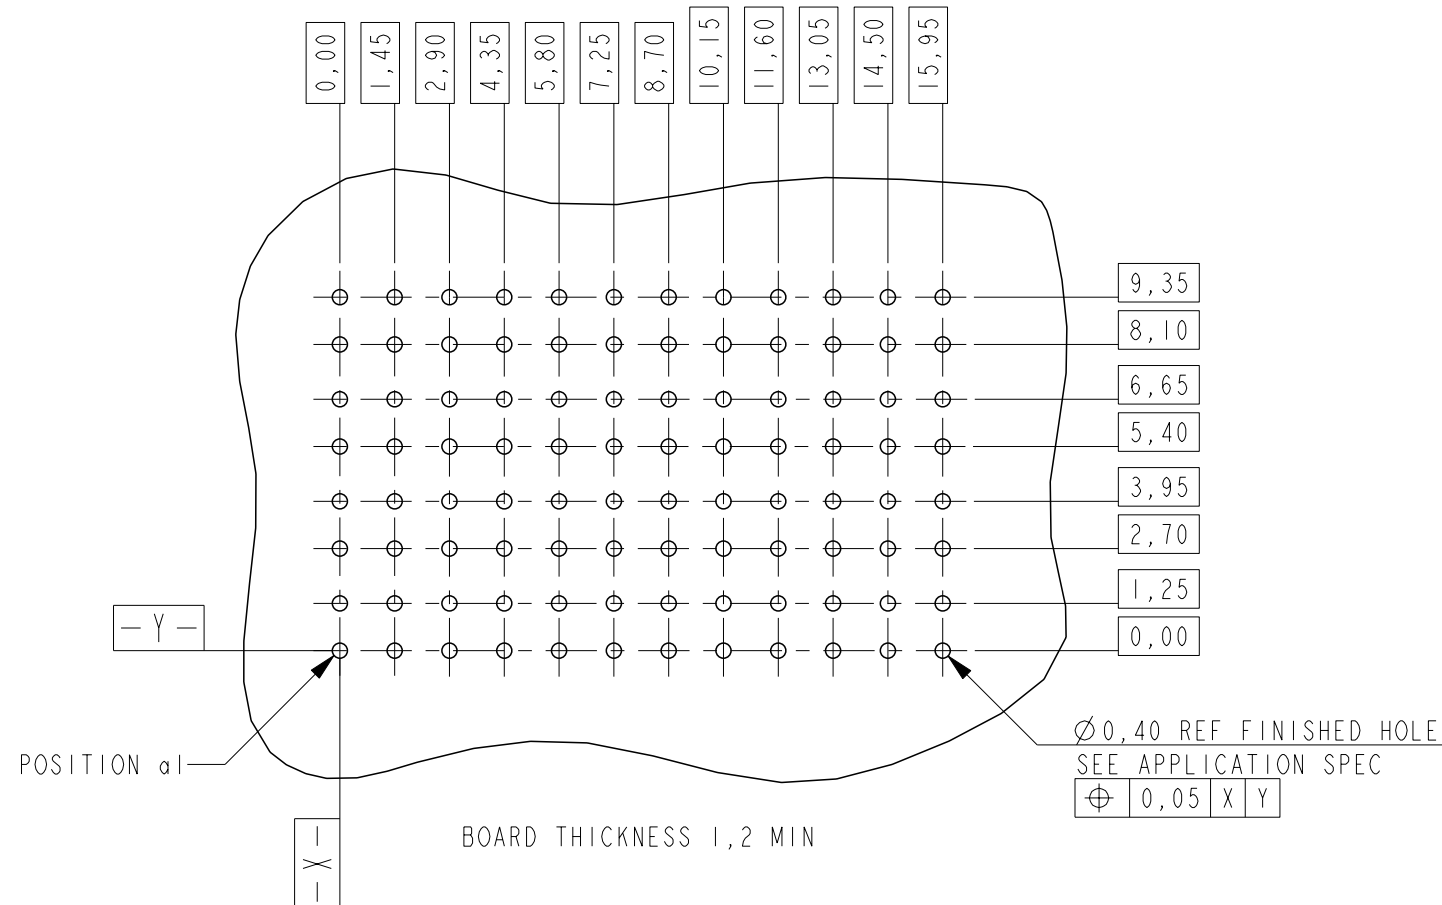

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE SHOWN)

NOTES:

- △ PLATING: 0,5µm MIN. TIN OVER NICKEL.
- △ PLATING:

PARTNUMBER	PERFORMANCE LEVEL
2042088-1	PERFORMANCE LEVEL 1: CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III: UNCONTROLLED ENVIRONMENT APPLICATIONS. SEE PRODUCT SPEC 108-19353
2042088-2	PERFORMANCE LEVEL 2: CONFORMS TO ALL TESTING ACCORDING PRODUCT SPEC 108-19320, -250 MATING CYCLES, 4 DAYS MIXED GAS TEST PER IEC 60068-2-60 METHOD 1

- 3 CONSULT APPLICATION SPEC OR CONTACT TE CONNECTIVITY FOR PERMISSIBLE CONTACT ASSIGNMENTS.
- △ CONNECTOR MARKED WITH PARTNUMBER AND DATE CODE.
- 5 FOR PC-BOARD ROUTING RECOMMENDATIONS SEE SPEC 114-19140

PRODUCT HAS NOT COMPLETED
QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	±

MATERIAL

-

DWN

3 jan 08

CHK

3 jan 08

APVD

J. BROEKSTEEG

PRODUCT SPEC

SEE NOTE 2

APPLICATION SPEC

114-19106

WEIGHT

-

CUSTOMER DRAWING

3	OVERMOLD	LCP 30% GF NATURAL
2	HOUSING	LCP 30% GF NATURAL
1	CONTACT	COPPER ALLOY

ITEM NO.

DESCRIPTION

MATERIAL

TE Connectivity

NAME

MALE CONNECTOR
Z-PACK Slim UHD

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=2042088

-

SCALE

5:1

SHEET

1

OF

1

REV

B