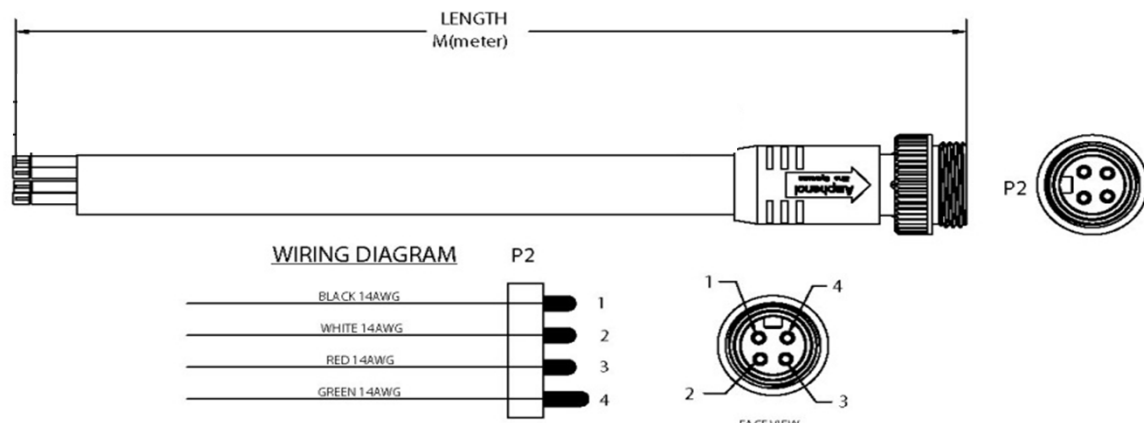


CONFIGURATION		PART NUMBER	LENGTH
PowerBOSSlite Drop Cable Assembly, Molded, 14 Awg, Standard Flex, Connectors - Male Straight Entry, Single Ended		P29016-MXX	AS REQUESTED
DIMENSIONS			
 <p>LENGTH M(meter)</p> <p><b>WIRING DIAGRAM</b></p> <p>P2</p> <p>BLACK 14AWG 1</p> <p>WHITE 14AWG 2</p> <p>RED 14AWG 3</p> <p>GREEN 14AWG 4</p> <p>FACE VIEW</p>			
TECHNICAL DATA			
TEMPERATURE RANGE:	-20C to +90C		
PROTECTION:	IP 67, NEMA 6P		
BODY:	OIL RESISTANT PVC		
CONTACTS:	COPPER ALLOY		
CONTACT PLATING:	GOLD OVER NICKEL PLATING		
CONNECTOR FACE:	PVC BLACK		
AMPERAGE:	15AMP		
COUPLING:	MACHINED ALUMINUM, ANODIZED		
CABLE CHARACTERISTICS:	UL TYPE TC 600V 90°C DRY 75°C WET, EXPOSED RUN (ER) OR MTW 600V 90°C OR STOOW 105°C 600V - CSA STOOW 600V FT2		
APPROVALS:	UL, c(UL)		

Sales and Technical Support 1-800-394-7732

[www.sineco.com](http://www.sineco.com)