

4

3

2

1

used for: D-SUB COMBINATION

F

F

E

E

D

D

C

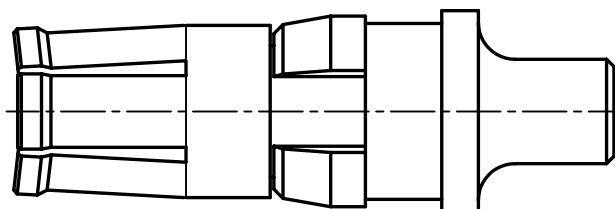
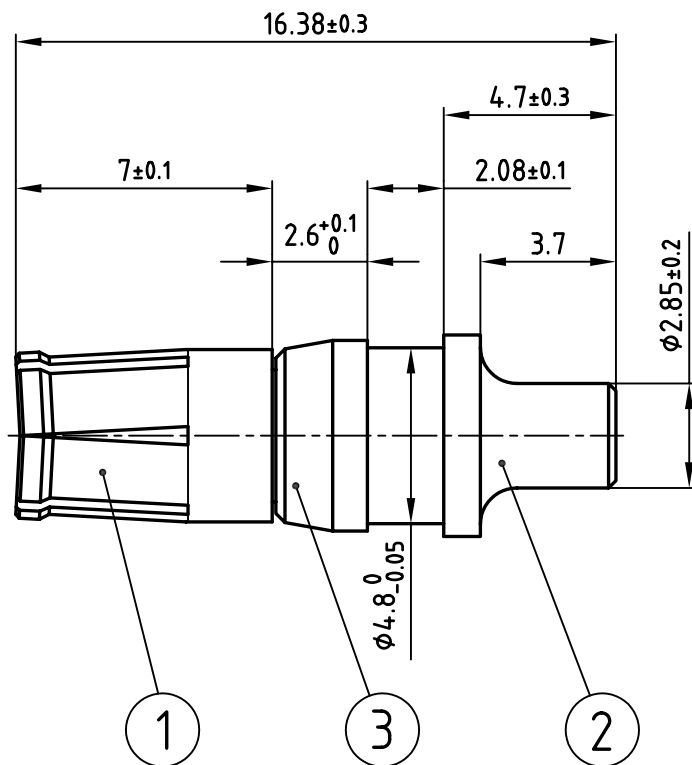
C

B

B

A

A

**NOTES:**

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: TIN PLATED

ITEM 3: NICKEL PLATED

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
				ISO 2768-m		
				1998	date	name
				drawn	23.03.	Barcinski
				appd.	23.03.	Mickenbecker
				norm		
				d-old		
						
rev.	description	date	name			

scale:	5:1	
material:	SEE NOTES	
title:	HIGH POWER CONTACT FEMALE SOLDER PIN STRAIGHT $\phi 2.85$ 20A D-SUB COMBINATION	
dwg no:	CAD/ REL.13	DIN-A
	13K1IF3A	4
		sh: 1/1
product no:	132C12039X	

4

3

2

1