

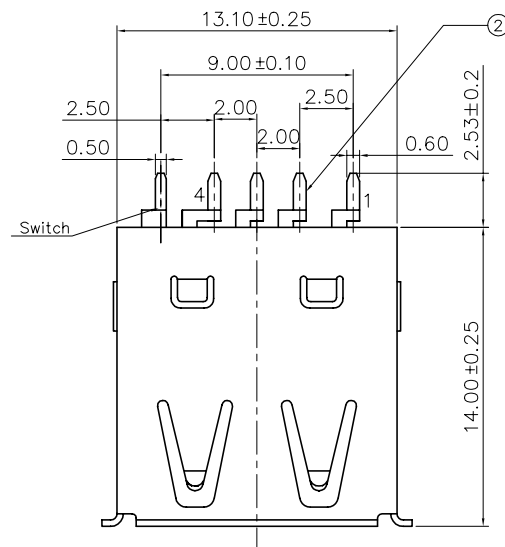
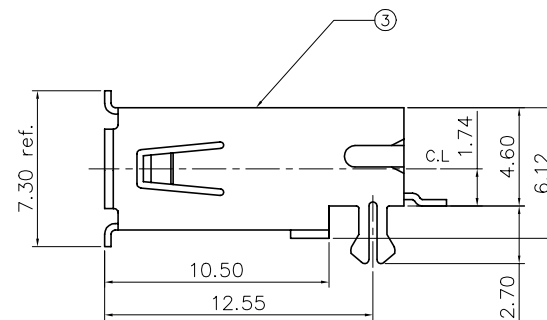


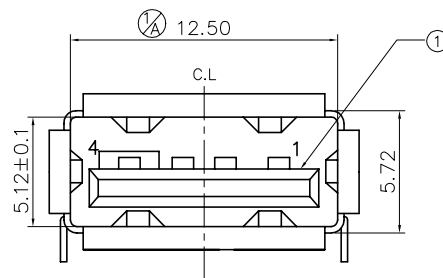

NOTE(I):
2575AY-05□□□□
1

1. Selective plating
'G1T,-05u" Min. gold in contact area/
100u" Min. Tin in solder area.
'G2T,-Gold flash in contact area/
100u" Min. Tin in solder area.
'G3T,-10u" Min. gold in contact area/
100u" Min. Tin in solder area.
'G4T,-15u" Min. gold in contact area/
100u" Min. Tin in solder area.
'G5T,-30u" Min. gold in contact area/
100u" Min. Tin in solder area.
'G6T,-50u" Min. gold in contact area/
100u" Min. Tin in solder area.

Recommended P.C.B Layout (Component Side)

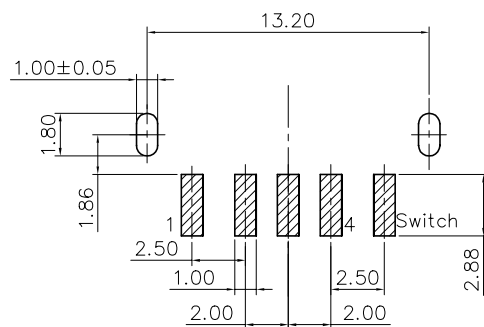

3	SHELL	C 2685 H	—	Tin Plated
2	TERMINAL	Pho.Bronze	—	Selective Gold/Tin
1	HOUSING	NY-6T	BLACK	UL 94V-0
NO. DESCRIPTION		MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: USB A Series with Switch,
Center Height 1.74mm,(Reverse Type)

						Angle	±2°	DRAW	李儒平	01/07/10	PART NO.					
						30 ~	±0.50	DESIGN	李儒平	01/07/10	PART NO. (OLD)		2575A-05GXT			
	A		增加標註尺寸			10 ~ 30	±0.30	CHECK	宋權哲	01/07/10	DRAWING NO.		2575A-05GXT			
	0	01/07/10	NEW			~ 10	±0.15	APPRO.	宋權哲	01/07/10	SCALE	4:1	UNIT	mm	A4	
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED										