


LOC		DIST		P		ZONE		LTR		REVISIONS		DATE	APPD
AA	27												
										K	REV; EC 0210-0840-94	3-14-95	LM NJ

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: POLYESTER FILM- 0.08 [0.003] THICK OVER PVC FILM 0.18 [0.007] THICK EACH SIDE. COPPER WIRE- 0.23 [0.009] THICK x 15.24 [0.600] WIDE. SHIELD- PVC, 0.25 [0.010] THICK.
- 3 CABLE MARKED WITH "AMP INC PN 553820 TYPE FCC UL CSA 12 AWG, CU 300V, 20 AMP 60°C" IN COLOR SPECIFIED FOR CONTINUOUS LENGTH OF ROLL AS SHOWN.
- 4 CAUTION: THE UNDERCARPET CABLE MAY NOT BE USED OUTDOORS OR IN WET LOCATIONS; WHERE THE CABLE WOULD BE SUBJECT TO CORROSIVE VAPORS; IN ANY HAZARDOUS (CLASSIFIED) LOCATION; OR IN RESIDENTIAL, SCHOOL, AND HOSPITAL BUILDINGS.

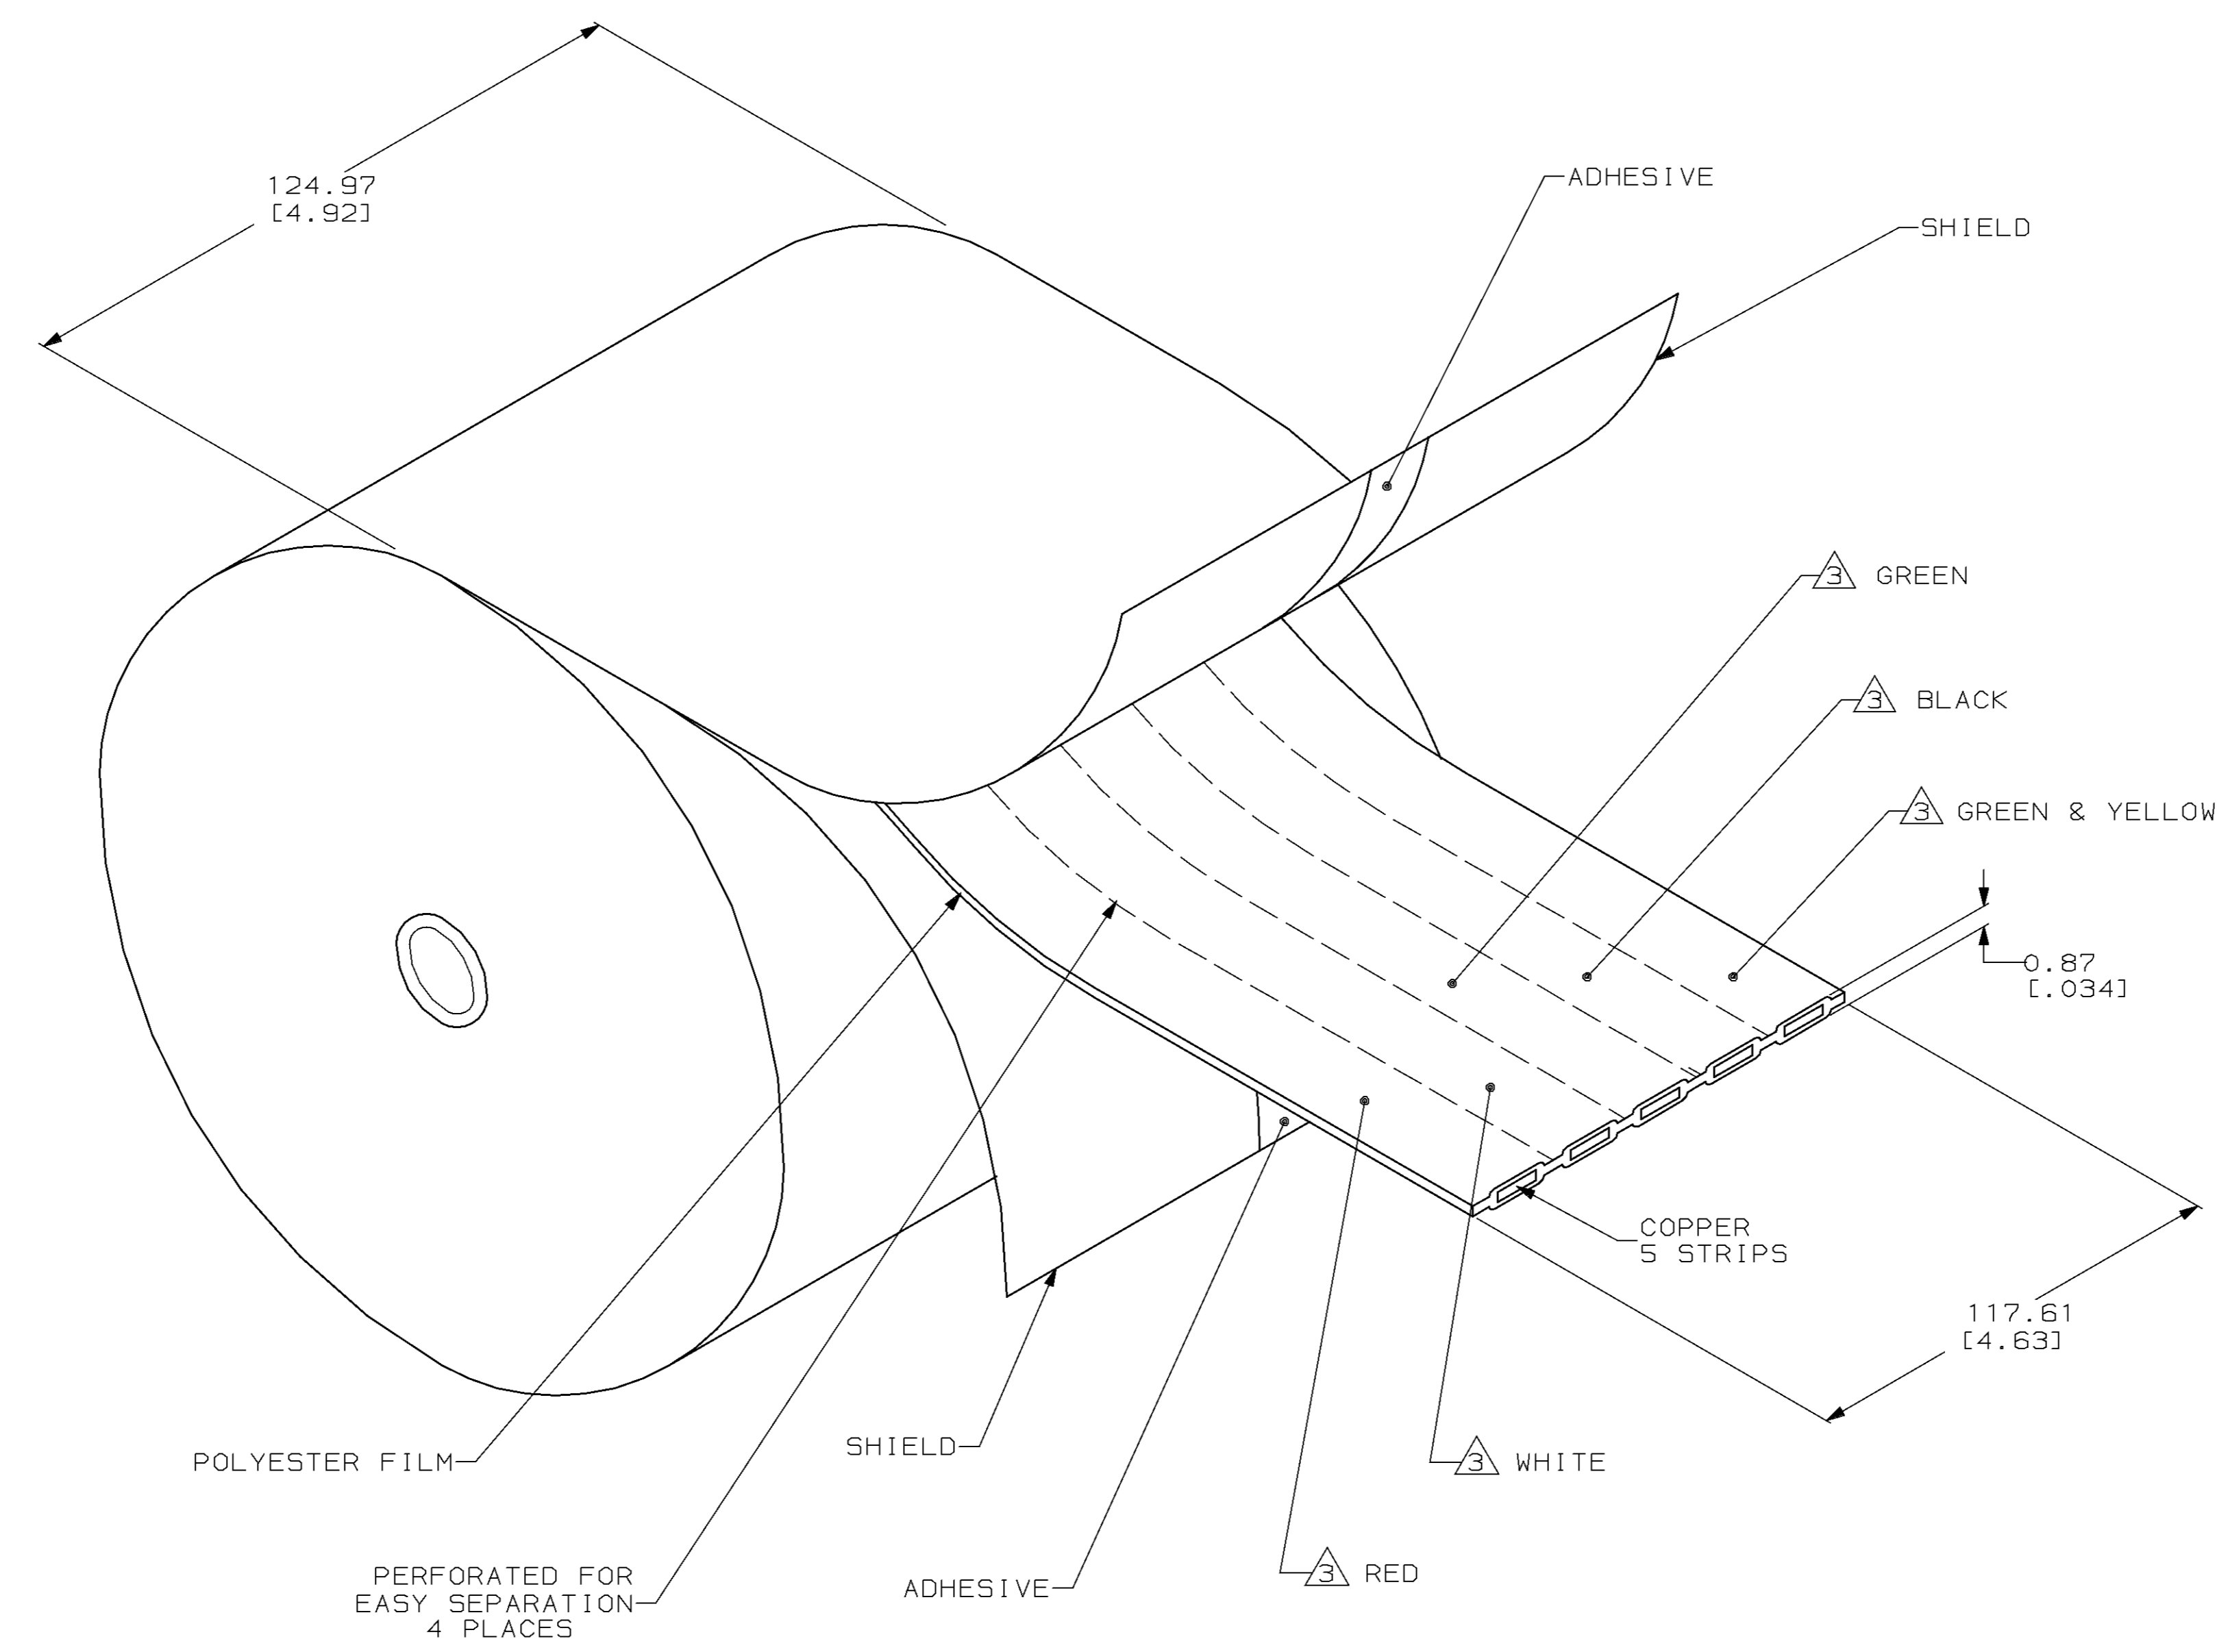

30.78	[101]	3-553820-4
15.54	[51]	3-553820-3
76.51	[251]	3-553820-1
LENGTH PER ROLL - M (FEET)		PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:	DR 2-17-94 B. SIMPSON
2 PLC DEC ± -	CHK 2-25-94 C. WHITT
3 PLC DEC ± -	APPD 3-3-94 B. MCNEIL
ANGLES ± -	APPD 3-3-94 D. MARGO
MATERIAL	PRODUCT SPEC 108-6038
FINISH	APPLICATION SPEC 114-6008
WEIGHT	

AMP AMP Incorporated Harrisburg, PA 17105-3608		
NAME CABLE, FLAT, 5 CONDUCTOR, 12 AWG, ISOLATED GROUND, POWER, UNDERCARPET		
SIZE D	CAGE CODE 00779	DRAWING NO C=553820
SCALE		SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.